NOTES:

(SEE RAYCHEM INFORMATION DRAWING D-659-0097 AND HOUSING SPECIFICATION CONTROL DRAWING FOR FURTHER DETAILS).

PART DESCRIBED HEREON IS SUPPLIED AS SHOWN. IF CONTACTS, SEALING PLUGS, AND TOOLS ARE DESIRED. THE FOLLOWING MODIFICATION NUMBER IS TO BE ADDED TO THE PART NUMBER ON THE KIT PACKAGING LABEL ONLY:

| MOD NO. | |
|---------|---------------------------------------|
| 022 | WITH CONTACTS AND SEALING PLUGS |
| 023 | WITH CONTACTS, SEALING PLUGS AND TOOL |

REFERENCE RAYCHEM INFORMATION DRAWING D-659-0097 FOR CRIMP TOOLS OR ADDITIONAL CONTACTS, SEALING PLUGS OR TOOLS.

GROMMET DESIGNED TO SEAL ON WIRES HAVING AN INSULATION DIAMETER OF 0.030 TO 0.065.

PERFORMANCE: THIS PRODUCT IS DESIGNED TO MEET THE APPLICABLE REQUIREMENTS OF RAYCHEM SPECIFICATION C-6115.

MATERIALS:

PLASTIC INSERT


GROMMET

INTERFACIAL SEAL RETENTION CLIPS (20)

(INSIDE PLASTIC INSERT)

HIGH GRADE POLYARYLENE THERMOPLASTIC FLUOROSILICONE PER MIL-R-25988 FLUOROSILICONE PER MIL-R-25988 BERYLLIUM COPPER 172 PER QQ-C-533


(A) ROWS "A" AND "B" ARE AN INTEGRAL PART OF THE INSERT. ROWS "A" AND "B" ARE IDENTIFIED ON THE SIDE OF THE INSERT AS "A2" AND "B2".



D

C

SUL D

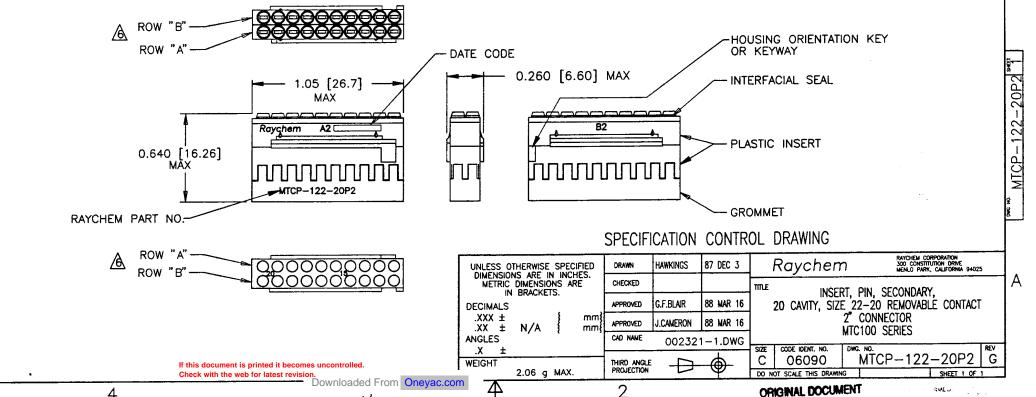

单击下面可查看定价,库存,交付和生命周期等信息

>>TE Connectivity(泰科)