

SPECIFICATION SHEET

55A6125

CABLE, ELECTRIC, RADIATION-CROSSLINKED, EXTRUDED, MODIFIED, FLUOROPOLYMER-INSULATED,
THREE CONDUCTOR, SHIELDED, JACKETED, NORMAL WEIGHT

13 August 1986

150°C


Revision A

The complete requirements for procuring the cable described herein shall consist of this document and the issue in effect of Raychem Specification 55A.

COMPONENT WIRES - 55A0816

SHIELD - TIN-COATED COPPER

JACKET - RADIATION-CROSSLINKED, MODIFIED ETFE

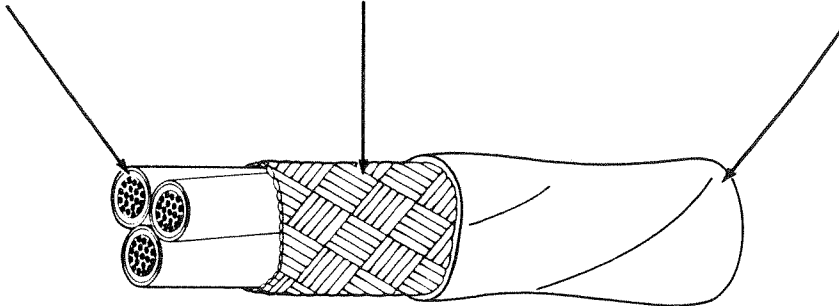

CABLE CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		OUTSIDE DIAMETER (in.)		MAXIMUM WEIGHT (lb/1000 ft)
			MINIMUM	NOMINAL <u>1/</u>	NOMINAL <u>1/</u>	MAXIMUM	
55A6125-26-*	26	38	.006	.008	.118	.125	11.3
55A6125-24-*	24	38	.006	.008	.129	.136	14.4
55A6125-22-*	22	38	.006	.008	.142	.149	18.8
55A6125-20-*	20	38	.006	.008	.159	.167	25.0
55A6125-18-*	18	38	.006	.008	.183	.191	33.6
55A6125-16-*	16	38	.006	.008	.200	.209	41.1

1/ Nominal values are for information only. Nominal values are not requirements.

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C
 Maximum continuous conductor temperature
 VOLTAGE RATING: 600 volts (rms)
 ACCELERATED AGING: 300 ± 3°C for 7 hours
 THERMAL SHOCK: 200 ± 3°C for 6 hours
 DIELECTRIC WITHSTAND: 1500 volts, 60 Hz
 FLAMMABILITY:
 Procedure 1, 3 seconds (maximum); 3 in. (maximum);
 no flaming of facial tissue
 JACKET COLOR: White preferred
 JACKET ELONGATION AND TENSILE STRENGTH:
 Elongation, 50% (minimum)
 Tensile Strength, 5000 lbf/in² (minimum)
 JACKET FLAWS:
 Spark Test, 1000 volts, 60 Hz (rms), 100% test
 Impulse Dielectric Test, 6.0 kV (peak), 100% test

LIFE CYCLE: 200 ± 3°C for 168 hours
 LOW TEMPERATURE-COLD BEND: -65 ± 3°C for 4 hours
 SHIELD COVERAGE: 85% (minimum)
 THERMAL SHOCK: 300 ± 3°C for 6 hours
 VOLTAGE WITHSTAND TEST: (After Accelerated Aging, Immersion, Life Cycle, Low Temperature-Cold Bend and Thermal Shock) 1000 volts, 60 Hz, 1 minute

PART NUMBER:

The "*" in the part numbers above shall be replaced by color code designators in accordance with MIL-STD-681 with a slash separating component wire colors and a dash separating the component wire colors from the jacket color.
 Example: AWG 20; white, black and red component wires; white jacket: 55A6125-20-9/0/2-9.

This construction meets the requirements of M27500-AWGSN3T23, less identification.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN

Raychem

Raychem Corporation
 300 Constitution Drive, Menlo Park, California 94025
 415) 361 3333 TWX 910 373 1205

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)