

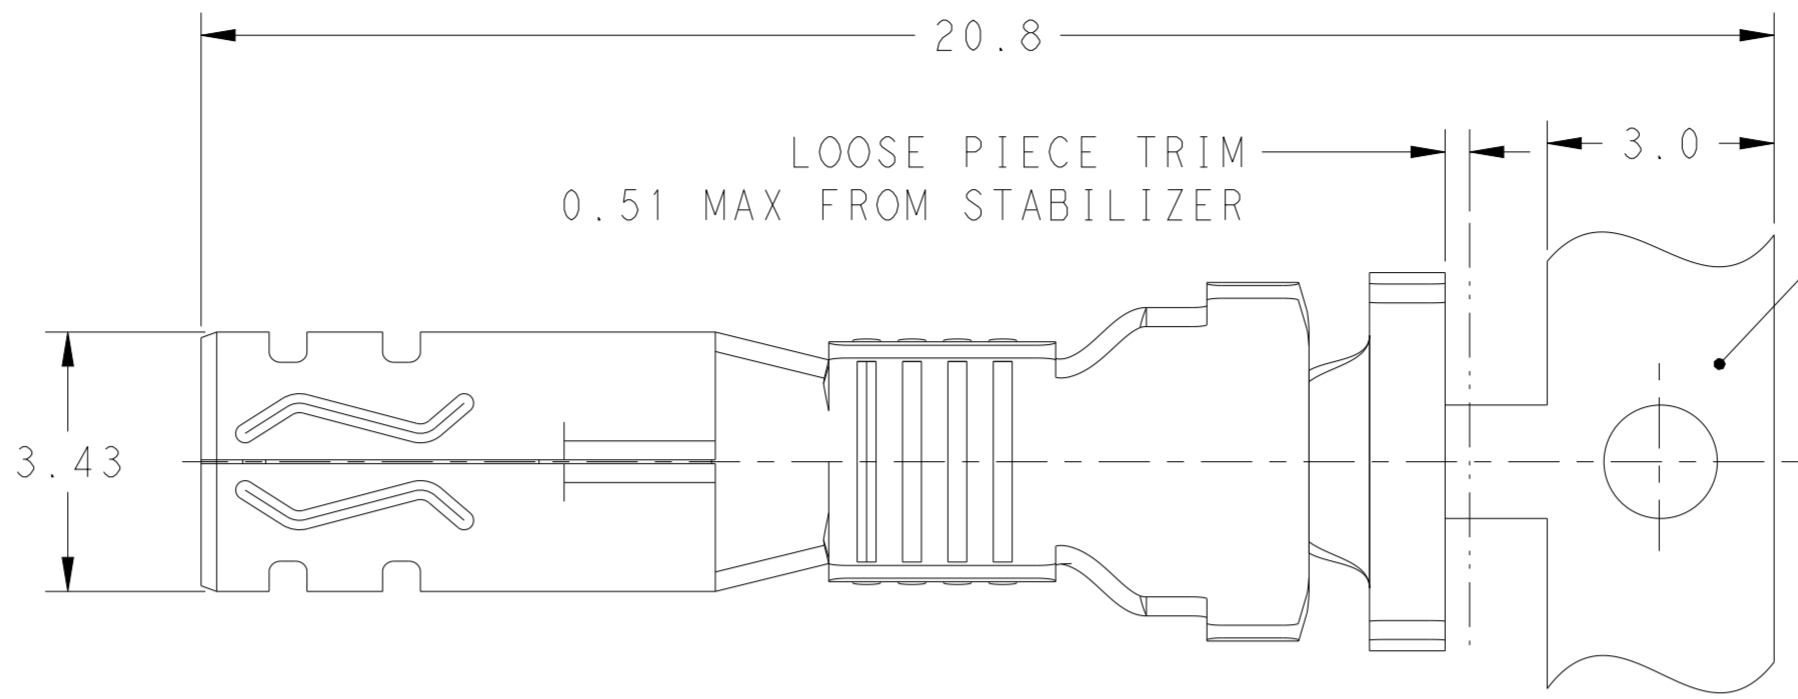
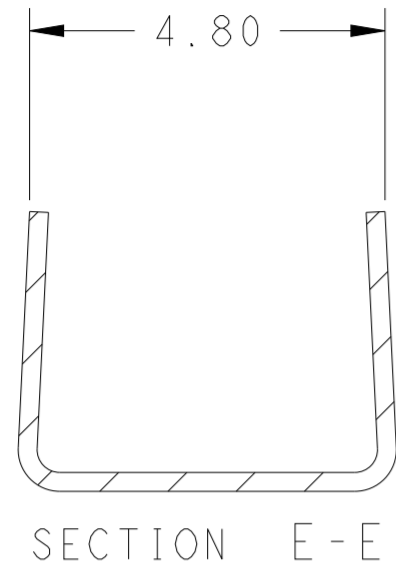
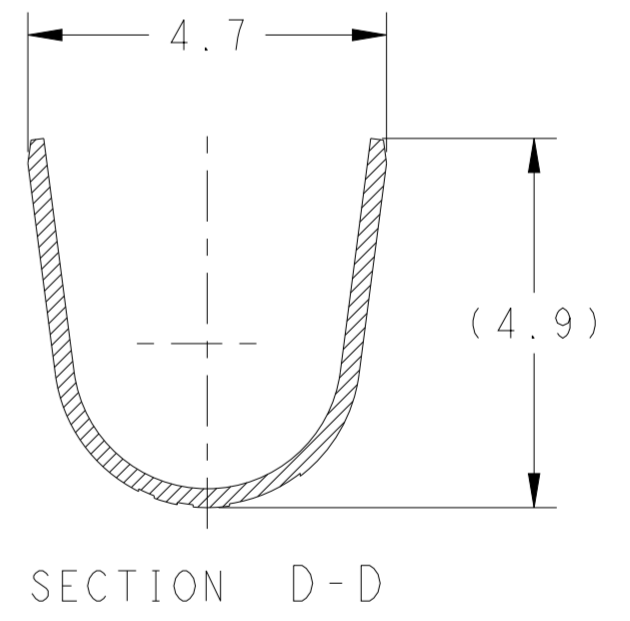
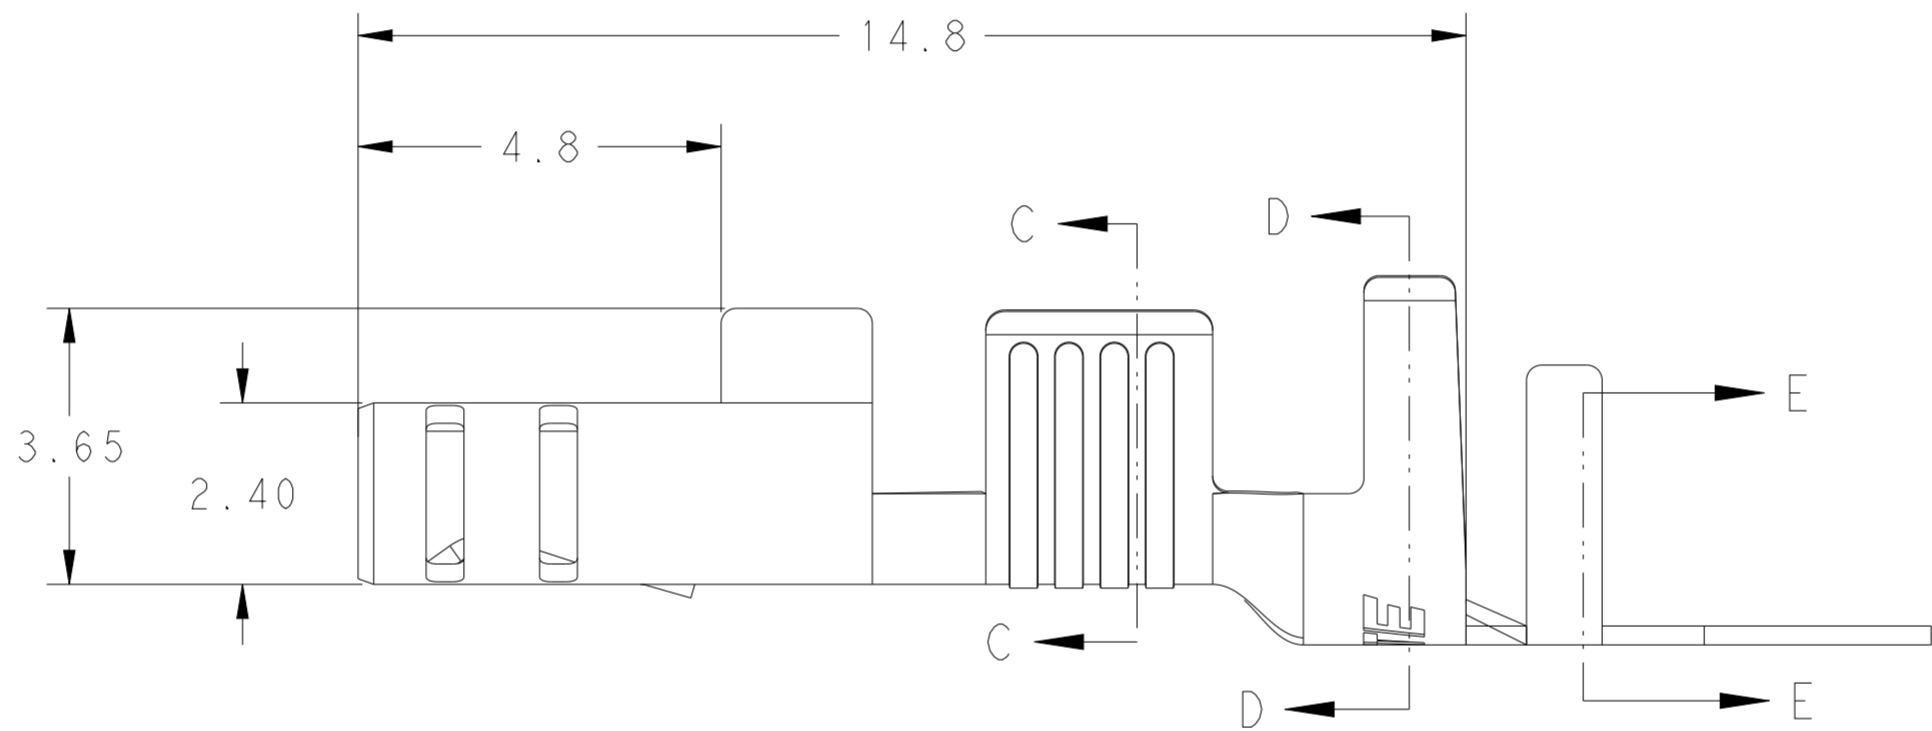



LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
ES	00	E	REVISED PER ECR-21-100678	08APR2021	SS	VS	

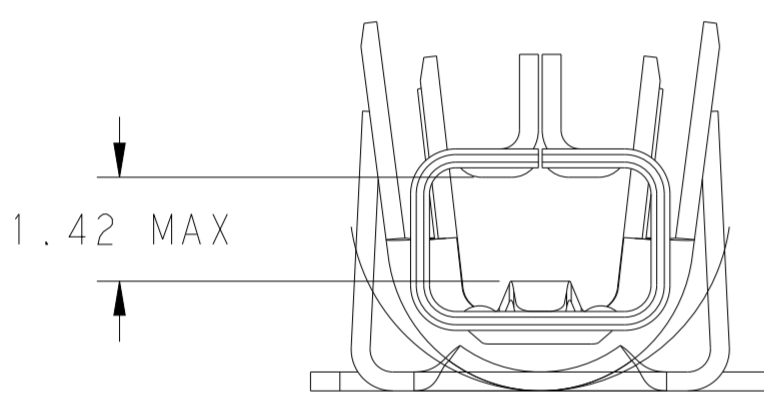

CARRIER NOT PRESENT ON LOOSE PIECE

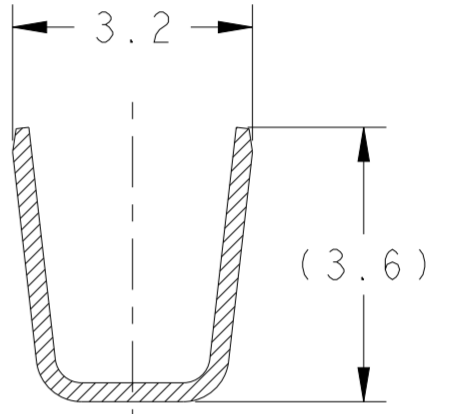

△ MATERIAL/SIZE MARK

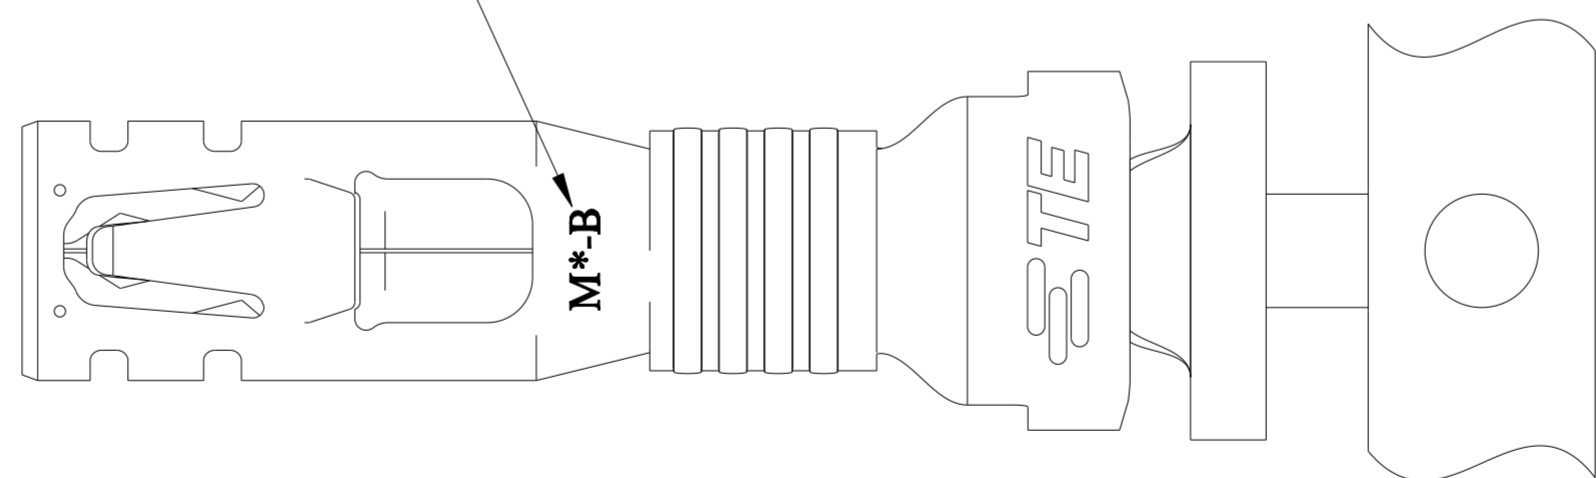

- RECOMENDED WIRE RANGE: 14 AWG COPPER STRANDED (3500-4300 CMA)
- APPLICABLE INSULATION DIAMETER: 3.40~3.70mm,
- APPLICABLE MATED PLUG HOUSING P/N:  
 \*-1971773-\*/\*-1971776-\*/\*-1971876-\*/  
 \*-2232265-\*/\*-2232266-\*/\*-2232357-\*

△ WIRE SIZE INDICATOR "B"=14 AWG

CONFIGURATION	MATERIAL	TEMP. RATING	MATERIAL/SIZE MARK	PART NO
LOOSE PIECE	COPPER ALLOY	HIGH 150°C	M0-B	4-1971781-2
CONTINUOUS W CARRIER	COPPER ALLOY	HIGH(150°C)	M0-B	1971781-2
CONTINUOUS W CARRIER	PHOS BRONZE	STANDARD(105°C)	M1-B	1971781-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN TOMMY WU 11JUL2012	 TE Connectivity RECEPTACLE CONTACT POWER TRIPLE LOCK
	0 PLC ±0.5	CHK HAPYE WU 11JUL2012	
	1 PLC ±0.30	APVD YUHONG MAO 11JUL2012	
	2 PLC ±	NAME	
MATERIAL SEE TABLE	PRE-TIN	PRODUCT SPEC 108-106118	SIZE A2
		APPLICATION SPEC 114-106118	CAGE CODE 00779
		WEIGHT -	DRAWING NO 1971781
		Customer Drawing	RESTRICTED TO -

SCALE 6:1 SHEET 1 OF 1 REV E

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)