

SPECIFICATION CONTROL DRAWING

55PC0124


TITLE TWO CONDUCTOR CABLE, UNSHIELDED, UNJACKETED, 600 VOLT

Date 4-30-97

Revision

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

COMPONENT WIRES - 55PC0114

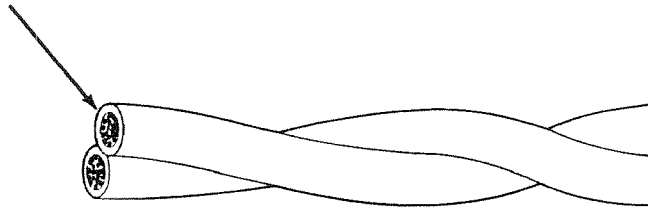

CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	DIAMETER (in.)			WEIGHT (lbs/1000 ft.)	
		LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC0124-26-*	26	.058	.061	.064	2.49	2.67
55PC0124-24-*	24	.068	.071	.074	3.66	3.85
55PC0124-22-*	22	.080	.083	.086	5.44	5.67
55PC0124-20-*	20	.097	.099	.101	8.32	8.57
55PC0124-18-*	18	.115	.118	.121	12.69	13.14
55PC0124-16-*	16	.130	.133	.136	16.21	16.72

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C
 Maximum continuous conductor temperature
 VOLTAGE RATING: 600 volts (rms)
 INSULATION FLAWS:
 Impulse Dielectric Test, 6.0 kV (peak)

PART NUMBER:
 The "*" in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors.
 Example: AWG 22, red and blue component wires;
 55PC0124-22-2/6

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HERIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

Raychem

Raychem Corporation
 300 Constitution Drive, Menlo Park, California 94025
 1-800-2 Raychem FAX: 1-415-361-6297

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)