
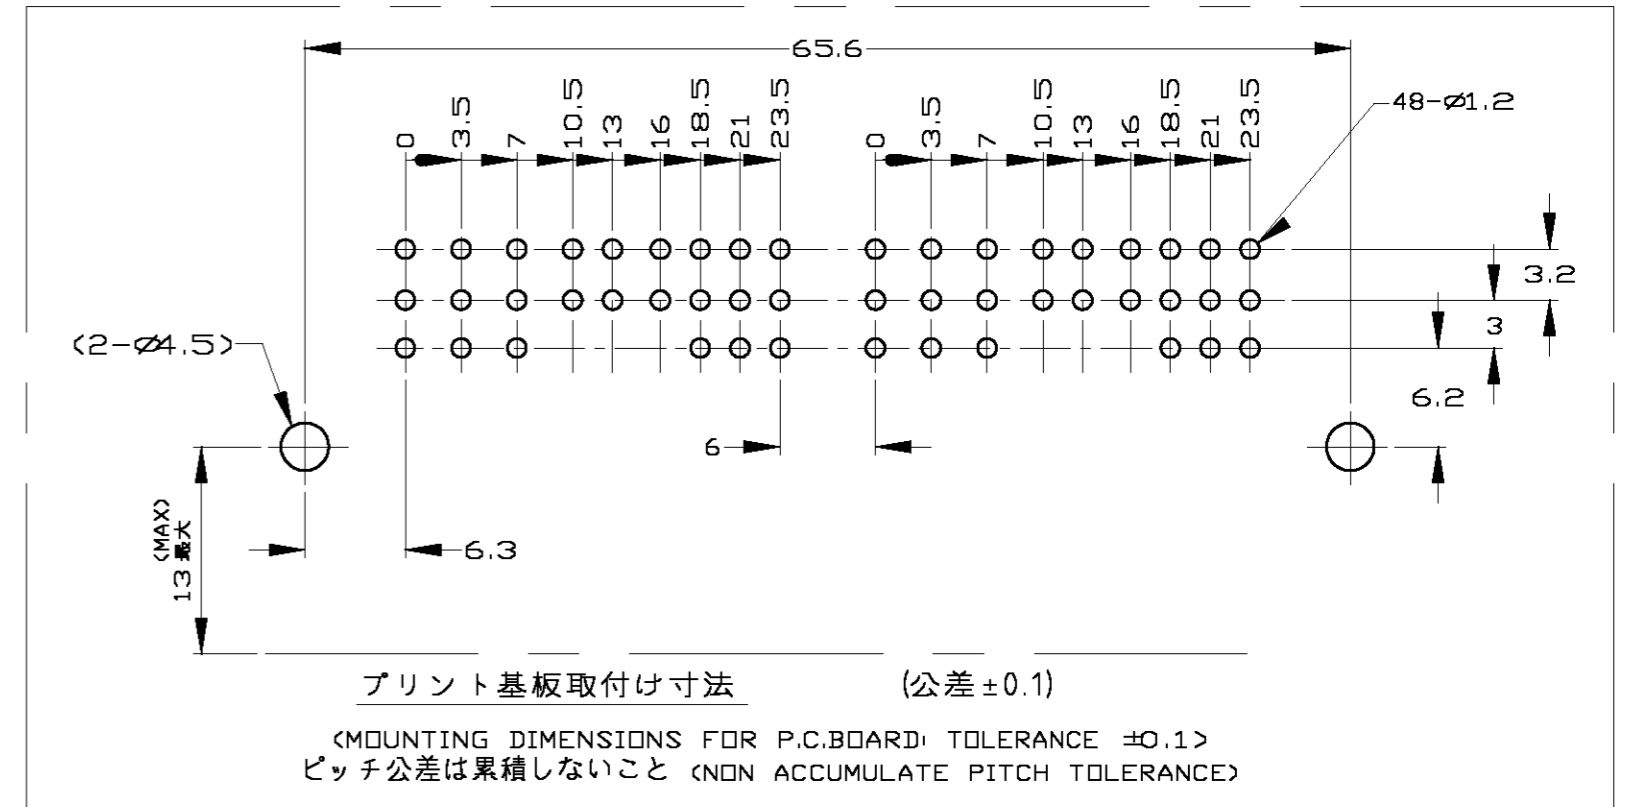
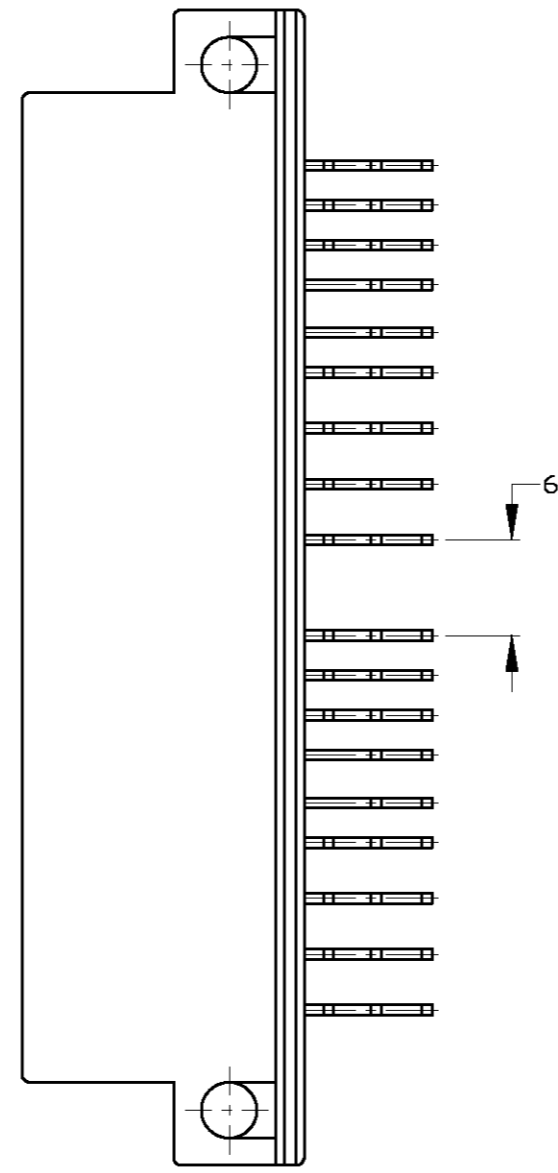
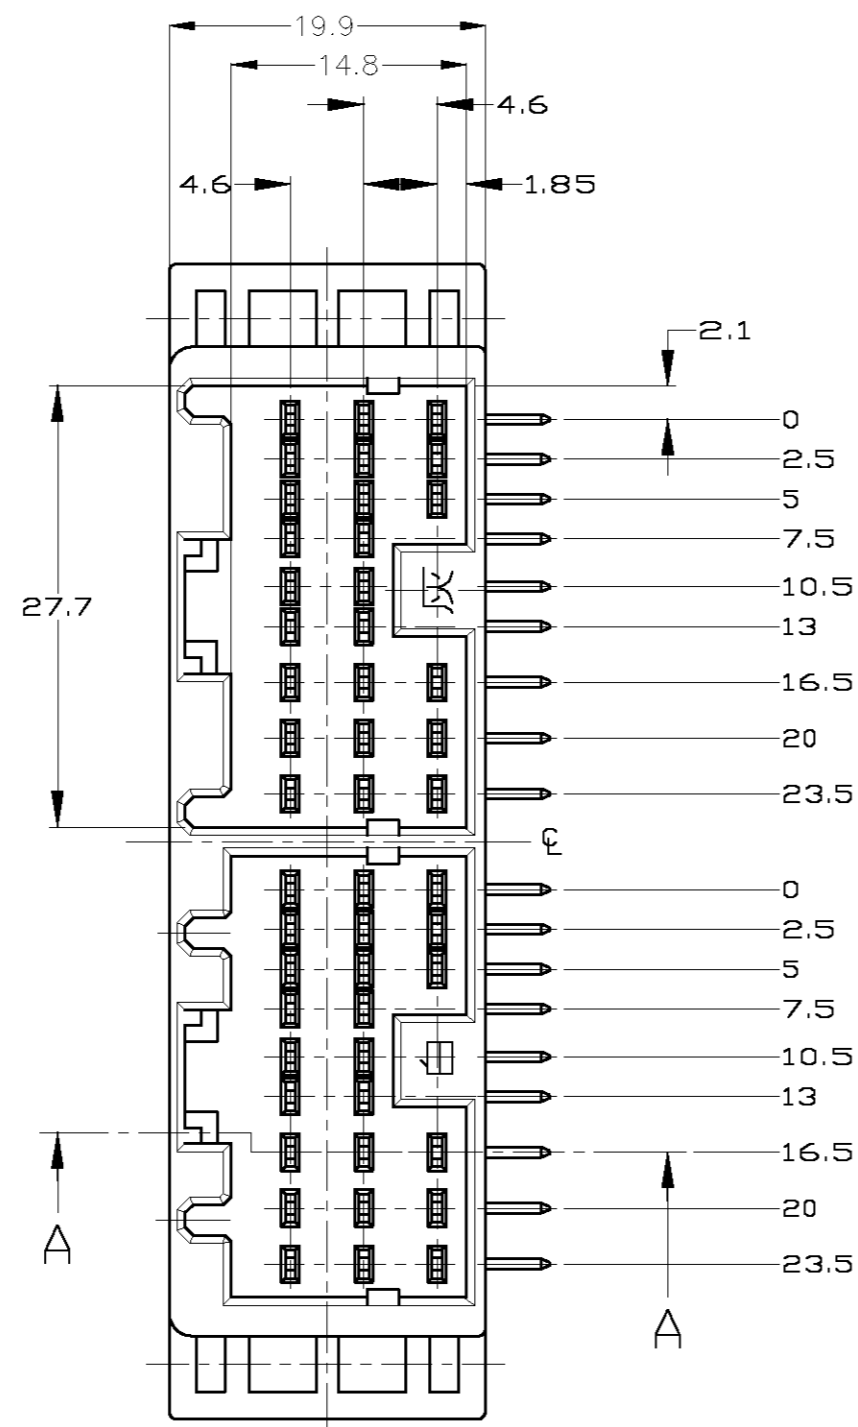




LOC		DIST		REVISES			DATE	DWN	APVD
J	-	P	LTR	DESCRIPTION					
		C4	REVISED	ECR-08-028602			17NOV08	AY	KS

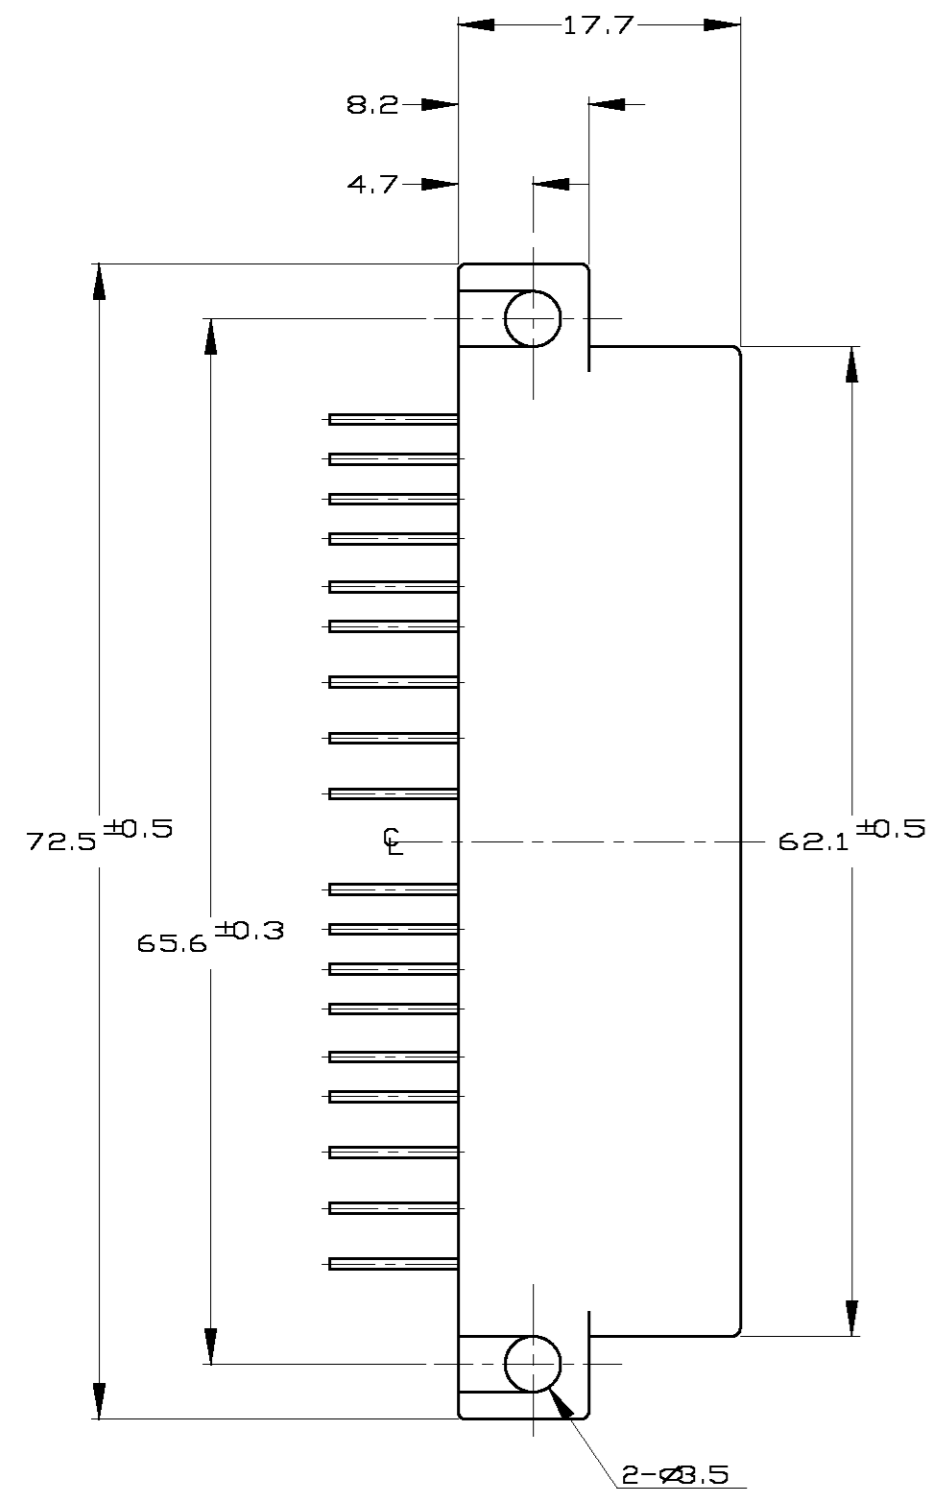

NOTE;

- 1 APPLICABLE P.C.BOARD THICKNESS: 1.6mm
- 2 RECOMMENDED MOUNTING SCREW: 4mmDIA, 6mmLENGTH
TAPPING SCREW SPECIFIED IN JIS B1115, B1122
(TIGHTENING TORQUE: 39.2N/cm MAX)
- 3 THE MATING PLUG HSG P/N: 316371,316372
- 4 PRODUCT SPEC. NO.108-5452
- 5 PACKING FOR UNISIA JECS PART NUMBER: 9-316370-6

- 1 適用プリント基板厚: 1.6mm
- 2 推奨取付ネジ: JIS B1115, B1122 タッピングネジ, ナベ2種
呼び径4, 長さ 6mm (締付トルク 39.2N/cm 以下)
- 3 嵌合相手型番: 316371, 316372
- 4 適用製品規格番号: 108-5452
- 5 ユニシア ジェックス向け、通い箱仕様品型番: 9-316370-6

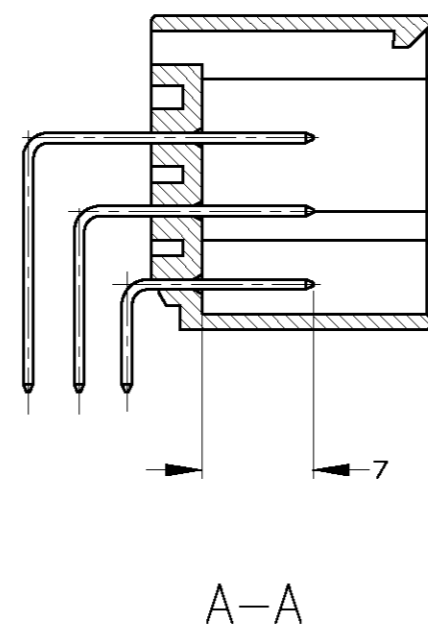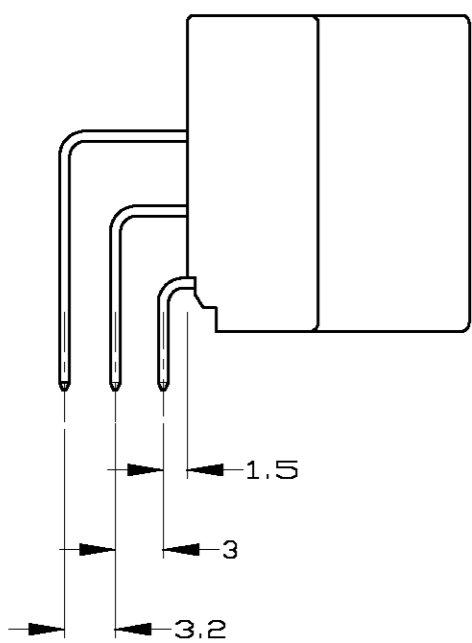

TOLERANCE UNLESS OTHERWISE SPECIFIED: 一般公差

0 < x ≤ 10	: ±0.2
10 < x ≤ 30	: ±0.25
30 < x ≤ 100	: ±0.3
ANGLE	: ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A.YAMAGUCHI 02APR03	Tyco Electronics AMP K.K. Kawasaki, Japan	
DIMENSIONS: 単位: 特 MM		CHK K.BETSUI 02APR03	NAME 名 040II SRS MULTI-LOCK CONNECTOR 48POS CAP ASSEMBLY	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APVD K.BETSUI 02APR03	DRAWING NO 番号 316370	
0 PLC ± 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-		PRODUCT SPEC 製品規格 SEE NOTE	SIZE A2	RESTRICTED TO
MATERIAL 材料 HOUSING: PBT CONTACT: BRASS		APPLICATION SPEC 取付適用規格	CAGE CODE 00779	SCALE 2:1
FINISH 仕上 SEE TABLE		WEIGHT	SHEET 1 OF 1	REV C4
CUSTOMER DRAWING		Tyco Electronics		

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)