
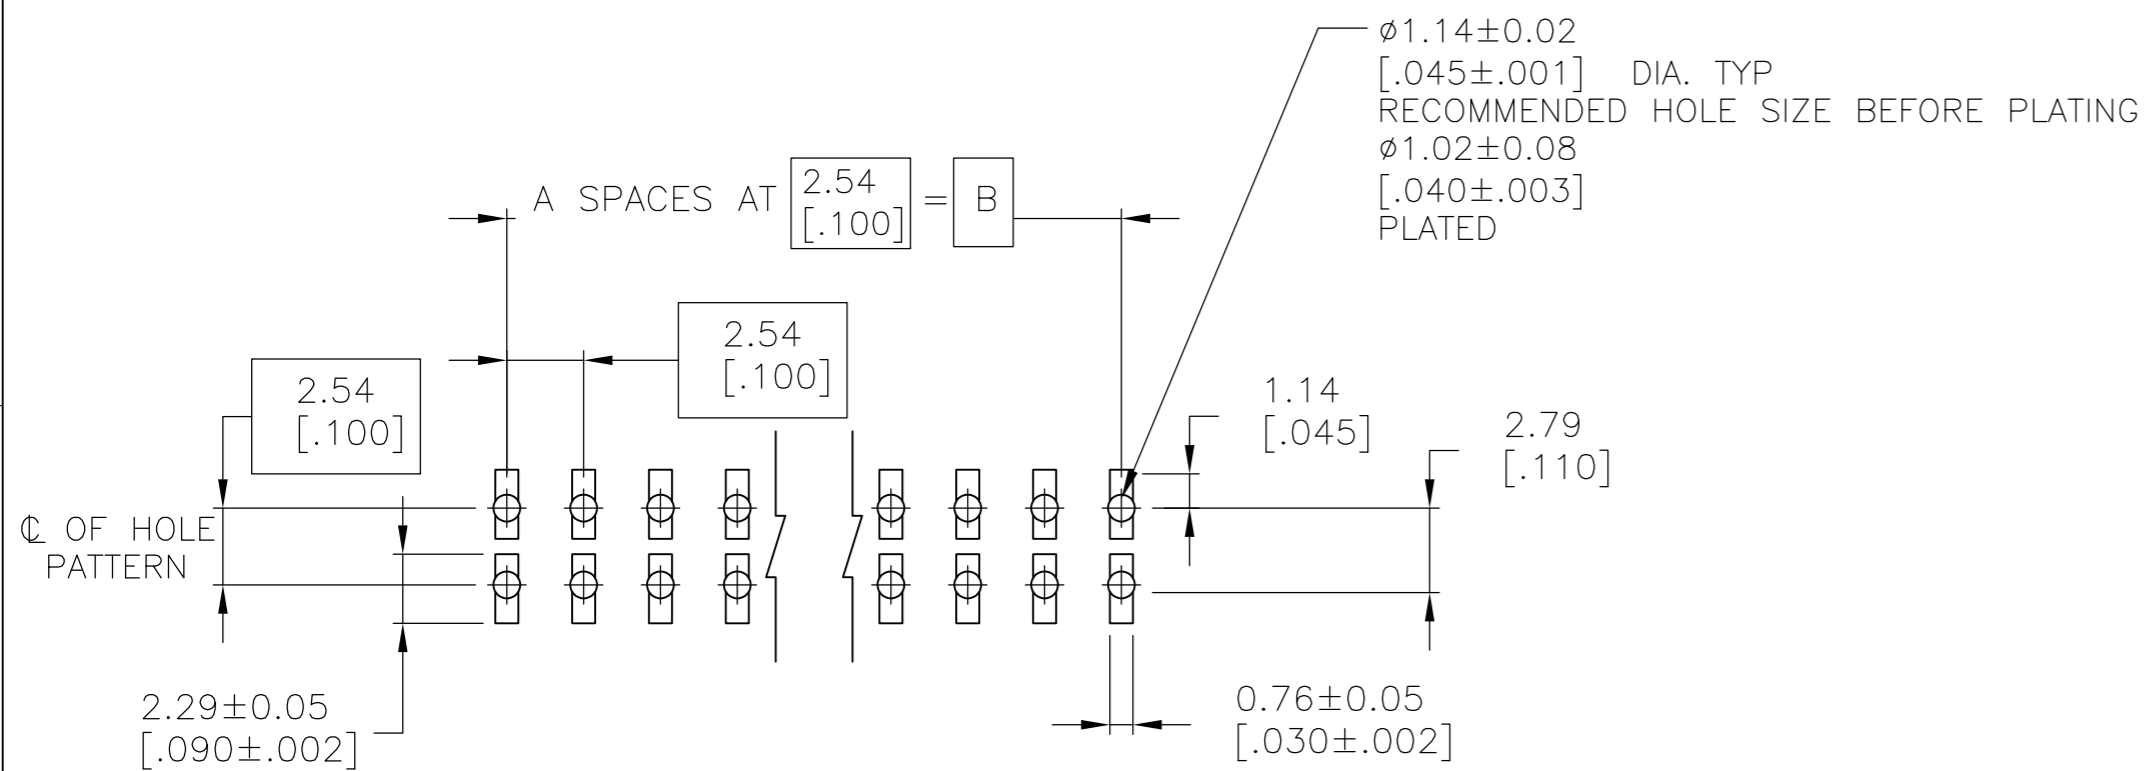
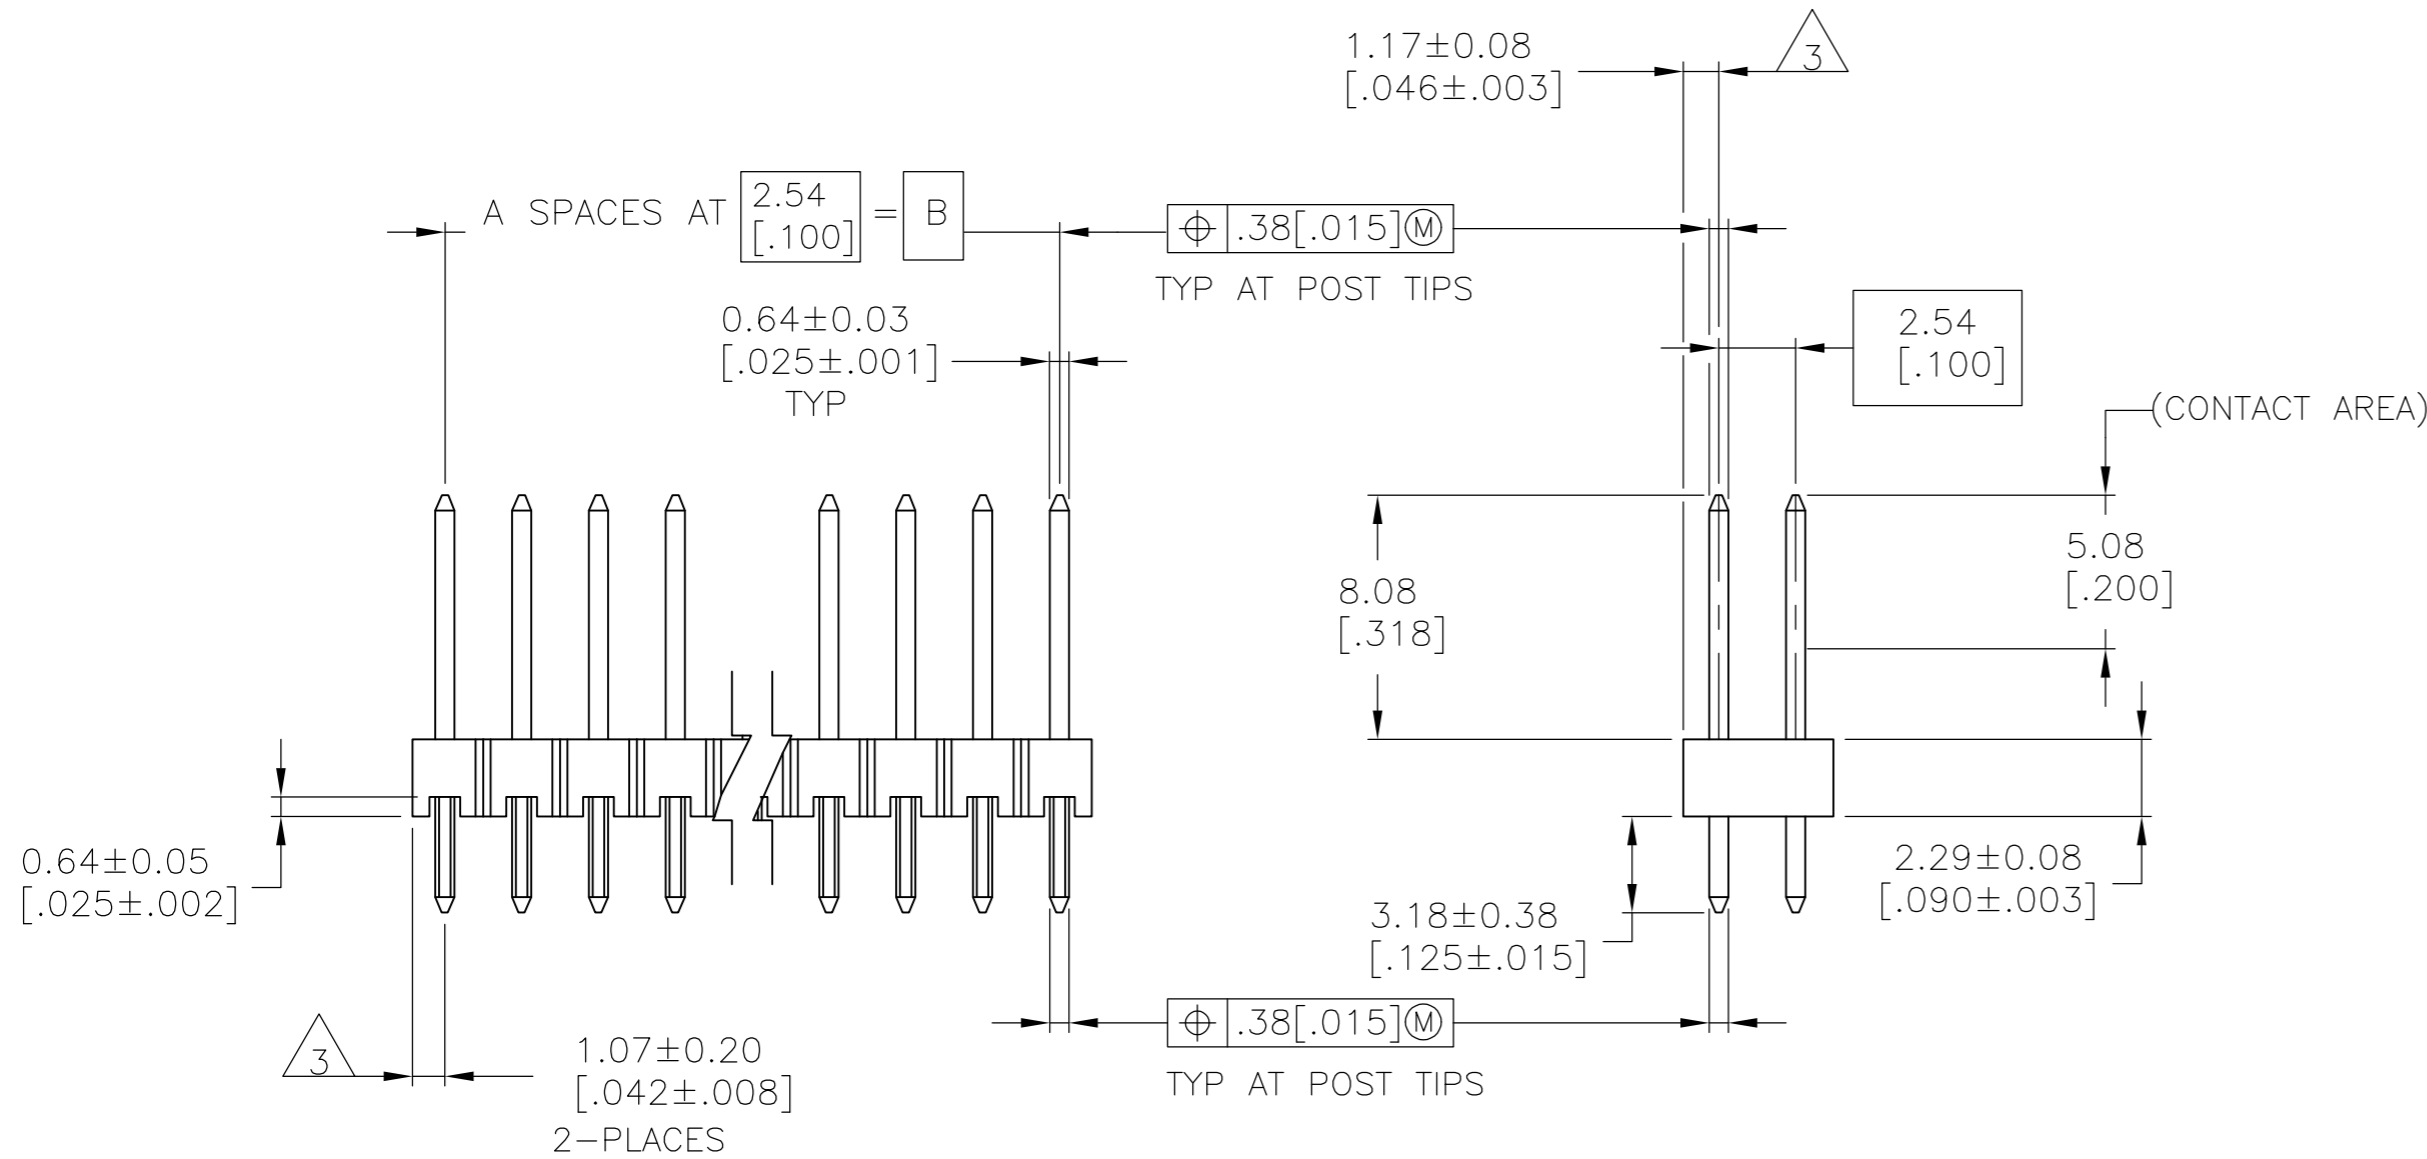


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
AD	00	C		REVISED PER ECO-14-006554	08MAY2014	NK	MM

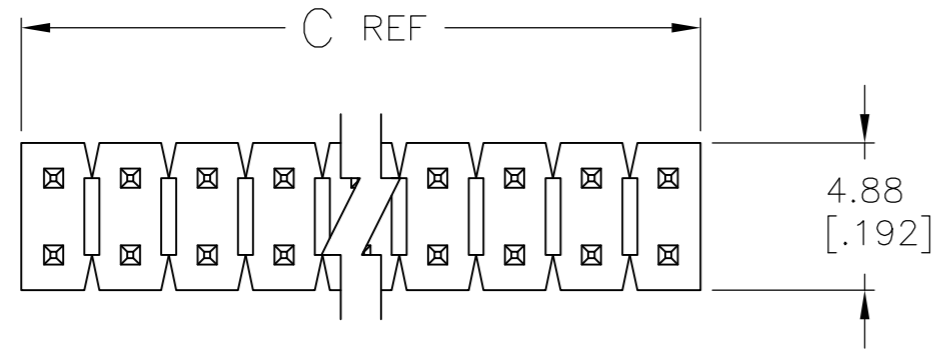

RECOMMENDED PC BOARD MOUNTING DIMENSIONS  
 FOR 1.60 [.063] THICK PC BOARD AND  
 0.305 [.012] STENCIL THICK

- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- 4 HOUSING: LCP, COLOR-BLACK.
- 5 POST: PHOSPHOR BRONZE
- 6 POST PLATING: 0.000076[.000003] MIN GOLD OVER 0.00068[.000027] Pd/Ni ON CONTACT AREA, 0.00254-0.00508[.000100-.000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127[.000050] NICKEL.

6	101.19 [3.984]	99.06 [3.900]	39	80	8-1977945-0
6	-	-	0	2	1977945-2
PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	30AUG2013	<b>STE</b> TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK	30AUG2013		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		HEADER ASSEMBLY, MOD II, BREAKAWAY, DOUBLE ROW, HIGH TEMPERATURE, 30 Pd/Ni	
0 PLC ± -		KIRAN HOLAL			
1 PLC ± -		MIKE MILLER		SIZE	CAGE CODE
2 PLC ± 0.51[.02]		APVD		DRAWING NO	RESTRICTED TO
3 PLC ± 0.127[.005]		MIKE MILLER		A2	00779
4 PLC ± 0.0127[.0005]		PRODUCT SPEC		C=1977945	
ANGLES ± -		APPLICATION SPEC		SCALE	SHEET
MATERIAL		WEIGHT		4:1	1 OF 1
HOUSING: 4		POST: SEE TABLE		CUSTOMER DRAWING	REV
POST: 5					C

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)