

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20 BY -

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
B		ECR-15-013759	100c+2015	DW	CW
B1		ECR-16-015492	17NOV2016	OY	CW
C		ECR-21-106515	21JUL2021	SQ	CW
C1		ECR-22-158213	29MAY2023	RW	CW

NOTES:

- TECHNICAL CHARACTERISTICS:  
INSULATION MATERIAL: PC  
RATED VOLTAGE: 500V  
RATED CURRENT: 16A  
INSULATION RESISTANCE:  $\geq 400M\Omega$   
RATED IMPULSE VOLTAGE: 6KV  
POLLUTION DEGREE: 3  
FLAMMABILITY: UL94V-0  
MATING CYCLES: 500 CYCLES  
WIRE RANGE:  $0.14mm^2 \sim 4mm^2$  (AWG26-AWG12)  
CONTACT TYPE: CRIMP CONTACT
- CONTACTS NEED TO BE ORDERED SEPARATELY.  
(ORDER No. REFER TO DRAWING: T20300X20XX000)

注释:

- 技术参数:  
绝缘材料: PC  
额定电压: 500V  
额定电流: 16A  
绝缘电阻:  $\geq 400M\Omega$   
脉冲电压: 6KV  
污染等级: 3  
阻燃等级: UL94V-0  
插拔次数: 500次  
接线范围:  $0.14mm^2 \sim 4mm^2$  (AWG26-AWG12)  
接线类型: 冷压接
- 端子需要单独订购。  
(订货号参考图面: T20300X20XX000)

TYPE-1, T2040244201-000, TE LOGO  
类型-1, T2040244201-000, TE LOGO  
TYPE-1, T2040244201-007, TE LOGO  
类型-1, T2040244201-007, TE LOGO

M4 SCREW, RECOMMENDED  
TIGHTENING TORQUE 1.2Nm  
M4螺丝, 推荐锁紧力矩 1.2Nm

4X M3 SCREW, RECOMMENDED  
TIGHTENING TORQUE 0.5Nm  
4X M3螺丝, 推荐锁紧力矩 0.5Nm

PANEL CUT FOR INSERTS FOR USING  
WITHOUT HOODS/ HOUSINGS  
不使用防护外壳时芯件的安装开孔图

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	Gino.Yao	20Aug2014	 TE Connectivity	NAME		HE-024-FC					
DIMENSIONS:		CHK	Chris.Wang	20Aug2014		PRODUCT SPEC		108-137044					
mm		APVD	Xiang.Xu	20Aug2014		APPLICATION SPEC		114-137044					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		MATERIAL		WEIGHT		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO			
0 PLC	±-	-		-		A3		00779	©-T2040244201000	-			
1 PLC	±-	-		-		CUSTOMER DRAWING		SCALE	1:1	SHEET	1 OF 2	REV	C1
2 PLC	±-	-		-									
3 PLC	±-	-		-									
4 PLC	±-	-		-									
ANGLES	±-	-		-									
FINISH	-	-		-									

1470-19 (3/13)

Downloaded From [Oneyac.com](http://Oneyac.com)

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20 BY -





ALL RIGHTS RESERVED.

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

NOTE:  
SEE SHEET 1

注释:  
见页 1

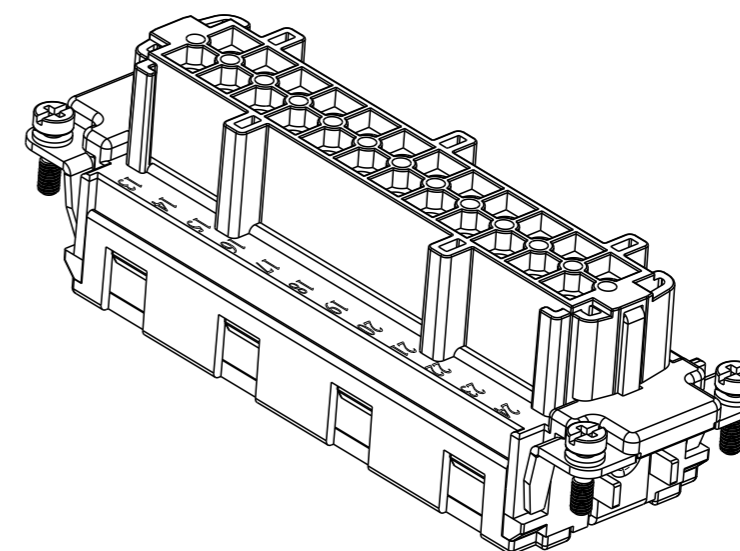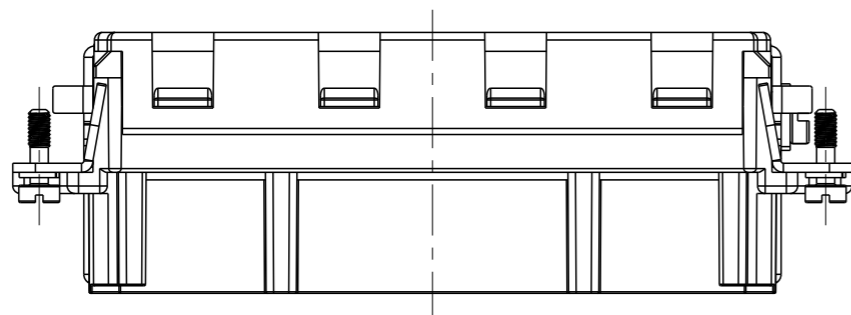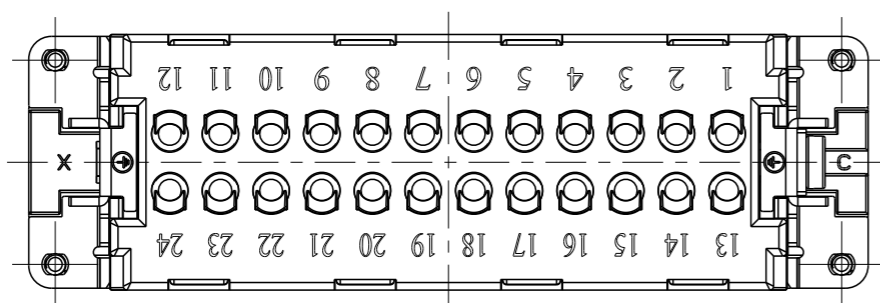


TYPE-2, T2040244201-001, STAINLESS STEEL SCREW, NO LOGO  
类型-2, T2040244201-001, 不锈钢螺丝, 无LOGO

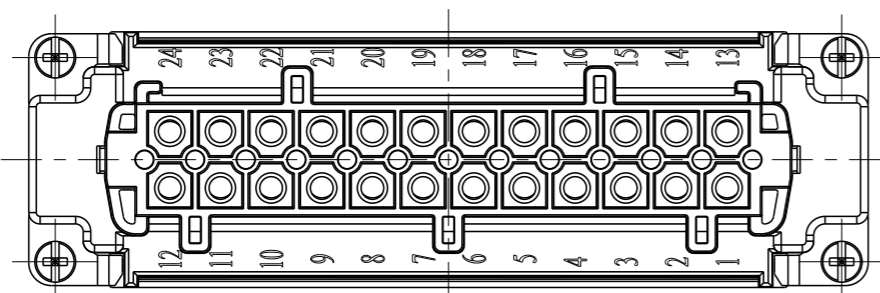

ALL SPEC DIMENSION REFER TO TYPE 1  
所有产品规格尺寸参照 TYPE 1

PART NUMBER 料号	PART DESCRIPTION 描述	TYPE 类型
T2040244201-001	HE-024-FC HE-024 FEMALE INSERT, CRIMPING, STAINLESS STEEL SCREW, NO LOGO HE-024母插, 冷压针, 不锈钢螺丝, 无LOGO	TYPE-2 类型-2
T2040244201-007	HE-024-FC HE-024 FEMALE INSERT, CRIMPING HE-024母插, 冷压针	TYPE-1 类型-1
T2040244201-000	HE-024-FC HE-024 FEMALE INSERT, CRIMPING HE-024母插, 冷压针	TYPE-1 类型-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Gino.Yao 20Aug2014	 TE Connectivity		
DIMENSIONS: mm		CHK Chris.Wang 20Aug2014			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Xiang.Xu 20Aug2014	NAME HE-024-FC		
0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-		PRODUCT SPEC 108-137044	RESTRICTED TO		
MATERIAL		APPLICATION SPEC 114-137044	SIZE A3	CAGE CODE 00779	DRAWING NO T2040244201000
FINISH		WEIGHT	SCALE 1:1		
-		CUSTOMER DRAWING	SHEET 2 OF 2		
-			REV C1		

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)