


- $\triangle 1$ HOUSING: LIQUID CRYSTAL POLYMER, COLOR BLACK.
CONTACTS: HIGH RELIABILITY COPPER ALLOY.
GROUND BUSES: BRASS, UNS C26000
- $\triangle 2$ CONTACTS & GROUND BUSES: NICKEL UNDERPLATE ALL OVER, MATING SURFACE PLATED TO MEET LEVEL 2 PERFORMANCE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-1422, SOLDER TAILS PLATED MATTE TIN.
- $\triangle 3$ DATE CODE MARKED IN AREA INDICATED ON SIDE OPPOSITE POSITION #1.
- $\triangle 4$ ONE GROUND BUS WITH 5 TAILS PER EACH MODULE.
- $\triangle 5$ TOLERANCE NON-ACCUMULATIVE.
- $\triangle 6$ FOR STANDARD APPLICATIONS, ORIENTATION HOLE TO BE $\phi .094 \pm .002 [2.39 \pm 0.05]$.
FOR SLIP-FIT APPLICATIONS, ORIENTATION HOLE TO BE $\phi .079 \pm .001 [2.00 \pm 0.03]$.
- $\triangle 7$ CONNECTORS PACKAGED ON 13 INCH DIA REELS PER EIA 481
- $\triangle 8$ PRELIMINARY - NOT RELEASED FOR PRODUCTION.
- $\triangle 9$ OBSOLETE

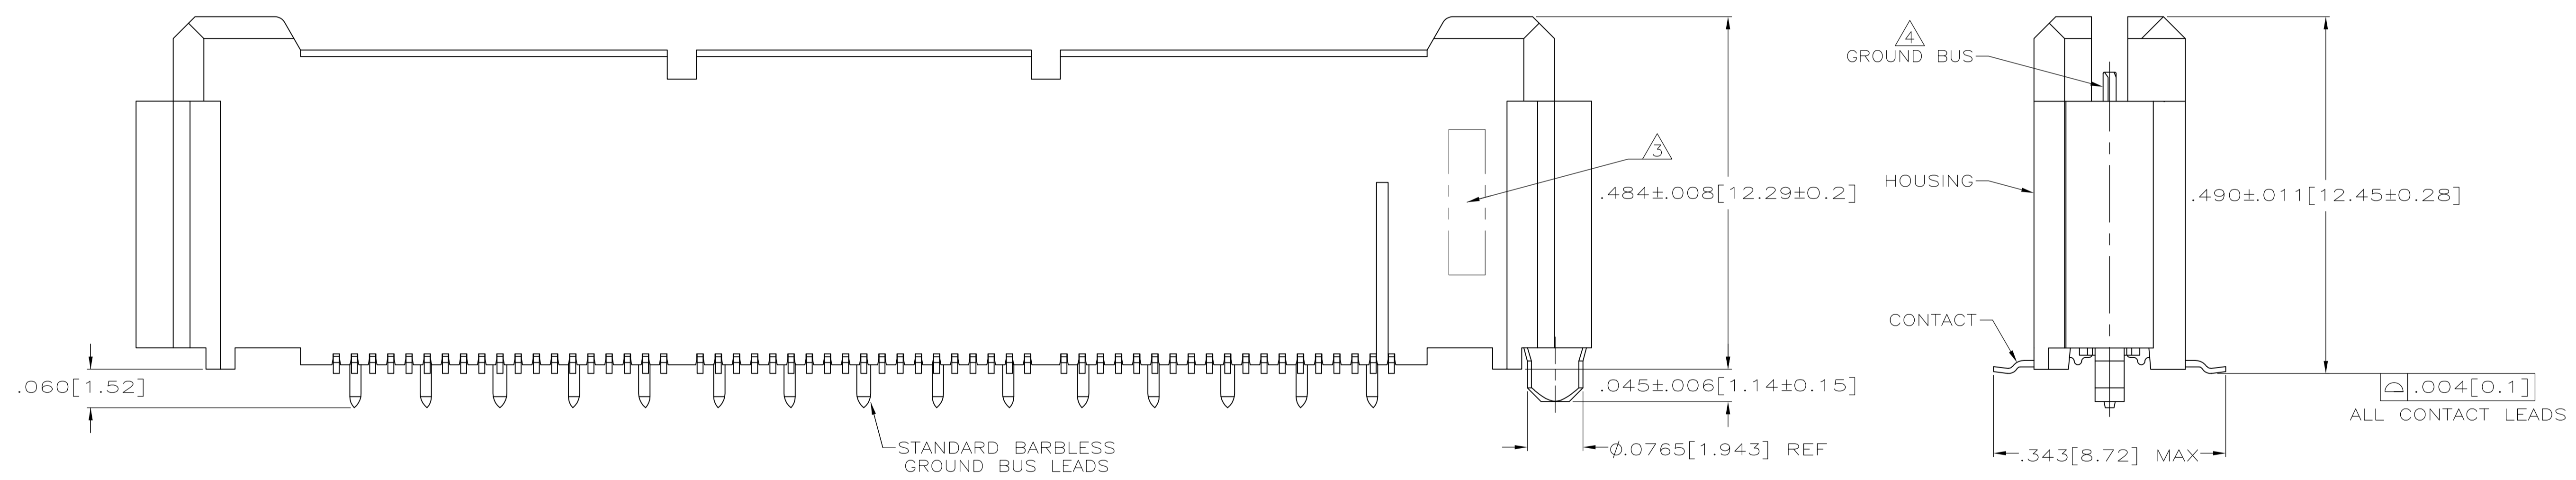

SEE SHEET 2 FOR RECOMMENDED PC BOARD LAYOUT AND PACKAGING DETAIL

| | | | | | | | | | |
|-----------------------|-----|-------------|--------------|---|---------------|---------------|---------------|-----------|-------------|
| $\triangle 8$ | NO | 4.724 [120] | 3.000 [76.2] | 6 | 3.450 [87.63] | 3.898 [99.01] | 4.000 [101.6] | 266 | 1-5767121-4 |
| $\triangle 8$ | NO | 4.094 [104] | 2.500 [63.5] | 5 | 2.950 [74.93] | 3.398 [86.31] | 3.500 [88.9] | 228 | 1-5767121-3 |
| $\triangle 8$ | NO | 3.465 [88] | 2.000 [50.8] | 4 | 2.450 [62.23] | 2.898 [73.61] | 3.000 [76.2] | 190 | 1-5767121-2 |
| | NO | 3.465 [88] | 1.500 [38.1] | 3 | 1.950 [49.53] | 2.398 [60.91] | 2.500 [63.5] | 152 | 1-5767121-1 |
| | NO | 2.835 [72] | 1.000 [25.4] | 2 | 1.450 [36.83] | 1.898 [48.21] | 2.000 [50.8] | 114 | 1-5767121-0 |
| | NO | 2.205 [56] | .500 [12.7] | 1 | .950 [24.13] | 1.398 [35.51] | 1.500 [38.1] | 76 | 5767121-9 |
| | NO | 1.732 [44] | .000 [0] | 0 | .450 [11.43] | .898 [22.81] | 1.000 [25.4] | 38 | 5767121-8 |
| $\triangle 8$ | YES | 4.724 [120] | 3.000 [76.2] | 6 | 3.450 [87.63] | 3.898 [99.01] | 4.000 [101.6] | 266 | 5767121-7 |
| $\triangle 8$ | YES | 4.094 [104] | 2.500 [63.5] | 5 | 2.950 [74.93] | 3.398 [86.31] | 3.500 [88.9] | 228 | 5767121-6 |
| $\triangle 8$ | YES | 3.465 [88] | 2.000 [50.8] | 4 | 2.450 [62.23] | 2.898 [73.61] | 3.000 [76.2] | 190 | 5767121-5 |
| | YES | 3.465 [88] | 1.500 [38.1] | 3 | 1.950 [49.53] | 2.398 [60.91] | 2.500 [63.5] | 152 | 5767121-4 |
| | YES | 2.835 [72] | 1.000 [25.4] | 2 | 1.450 [36.83] | 1.898 [48.21] | 2.000 [50.8] | 114 | 5767121-3 |
| $\triangle 9$ | YES | 2.205 [56] | .500 [12.7] | 1 | .950 [24.13] | 1.398 [35.51] | 1.500 [38.1] | 76 | 5767121-2 |
| | YES | 1.732 [44] | .000 [0] | 0 | .450 [11.43] | .898 [22.81] | 1.000 [25.4] | 38 | 5767121-1 |
| VACUUM COVER INCLUDED | | F | E | D | C | B | A | NO OF POS | PART NUMBER |


THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES
 TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ± -
 1 PLC ± -
 2 PLC ± -
 3 PLC ± .005(0.13)
 4 PLC ± -
 ANGLES ± -


MATERIAL $\triangle 1$ FINISH $\triangle 2$
 WEIGHT -
 CUSTOMER DRAWING

BIN G. ATTADIA 27 OCT 04
 CHK D. DIXON 27 OCT 04
 APVD D. DIXON 27 OCT 04
 NAME
 PRODUCT SPEC 108-1422
 APPLICATION SPEC 114-11004
 SIZE A1
 SCALE 8:1

STE TE Connectivity
 PLUG ASSEMBLY, .495 [12.57] VERTICAL, .025 [0.64] CL, GULL WING LEADS, POCKET TAPE PACKAGED, MICTOR
 DRAWING NO 00779
 PART NUMBER 5767121
 SHEET 1 OF 2

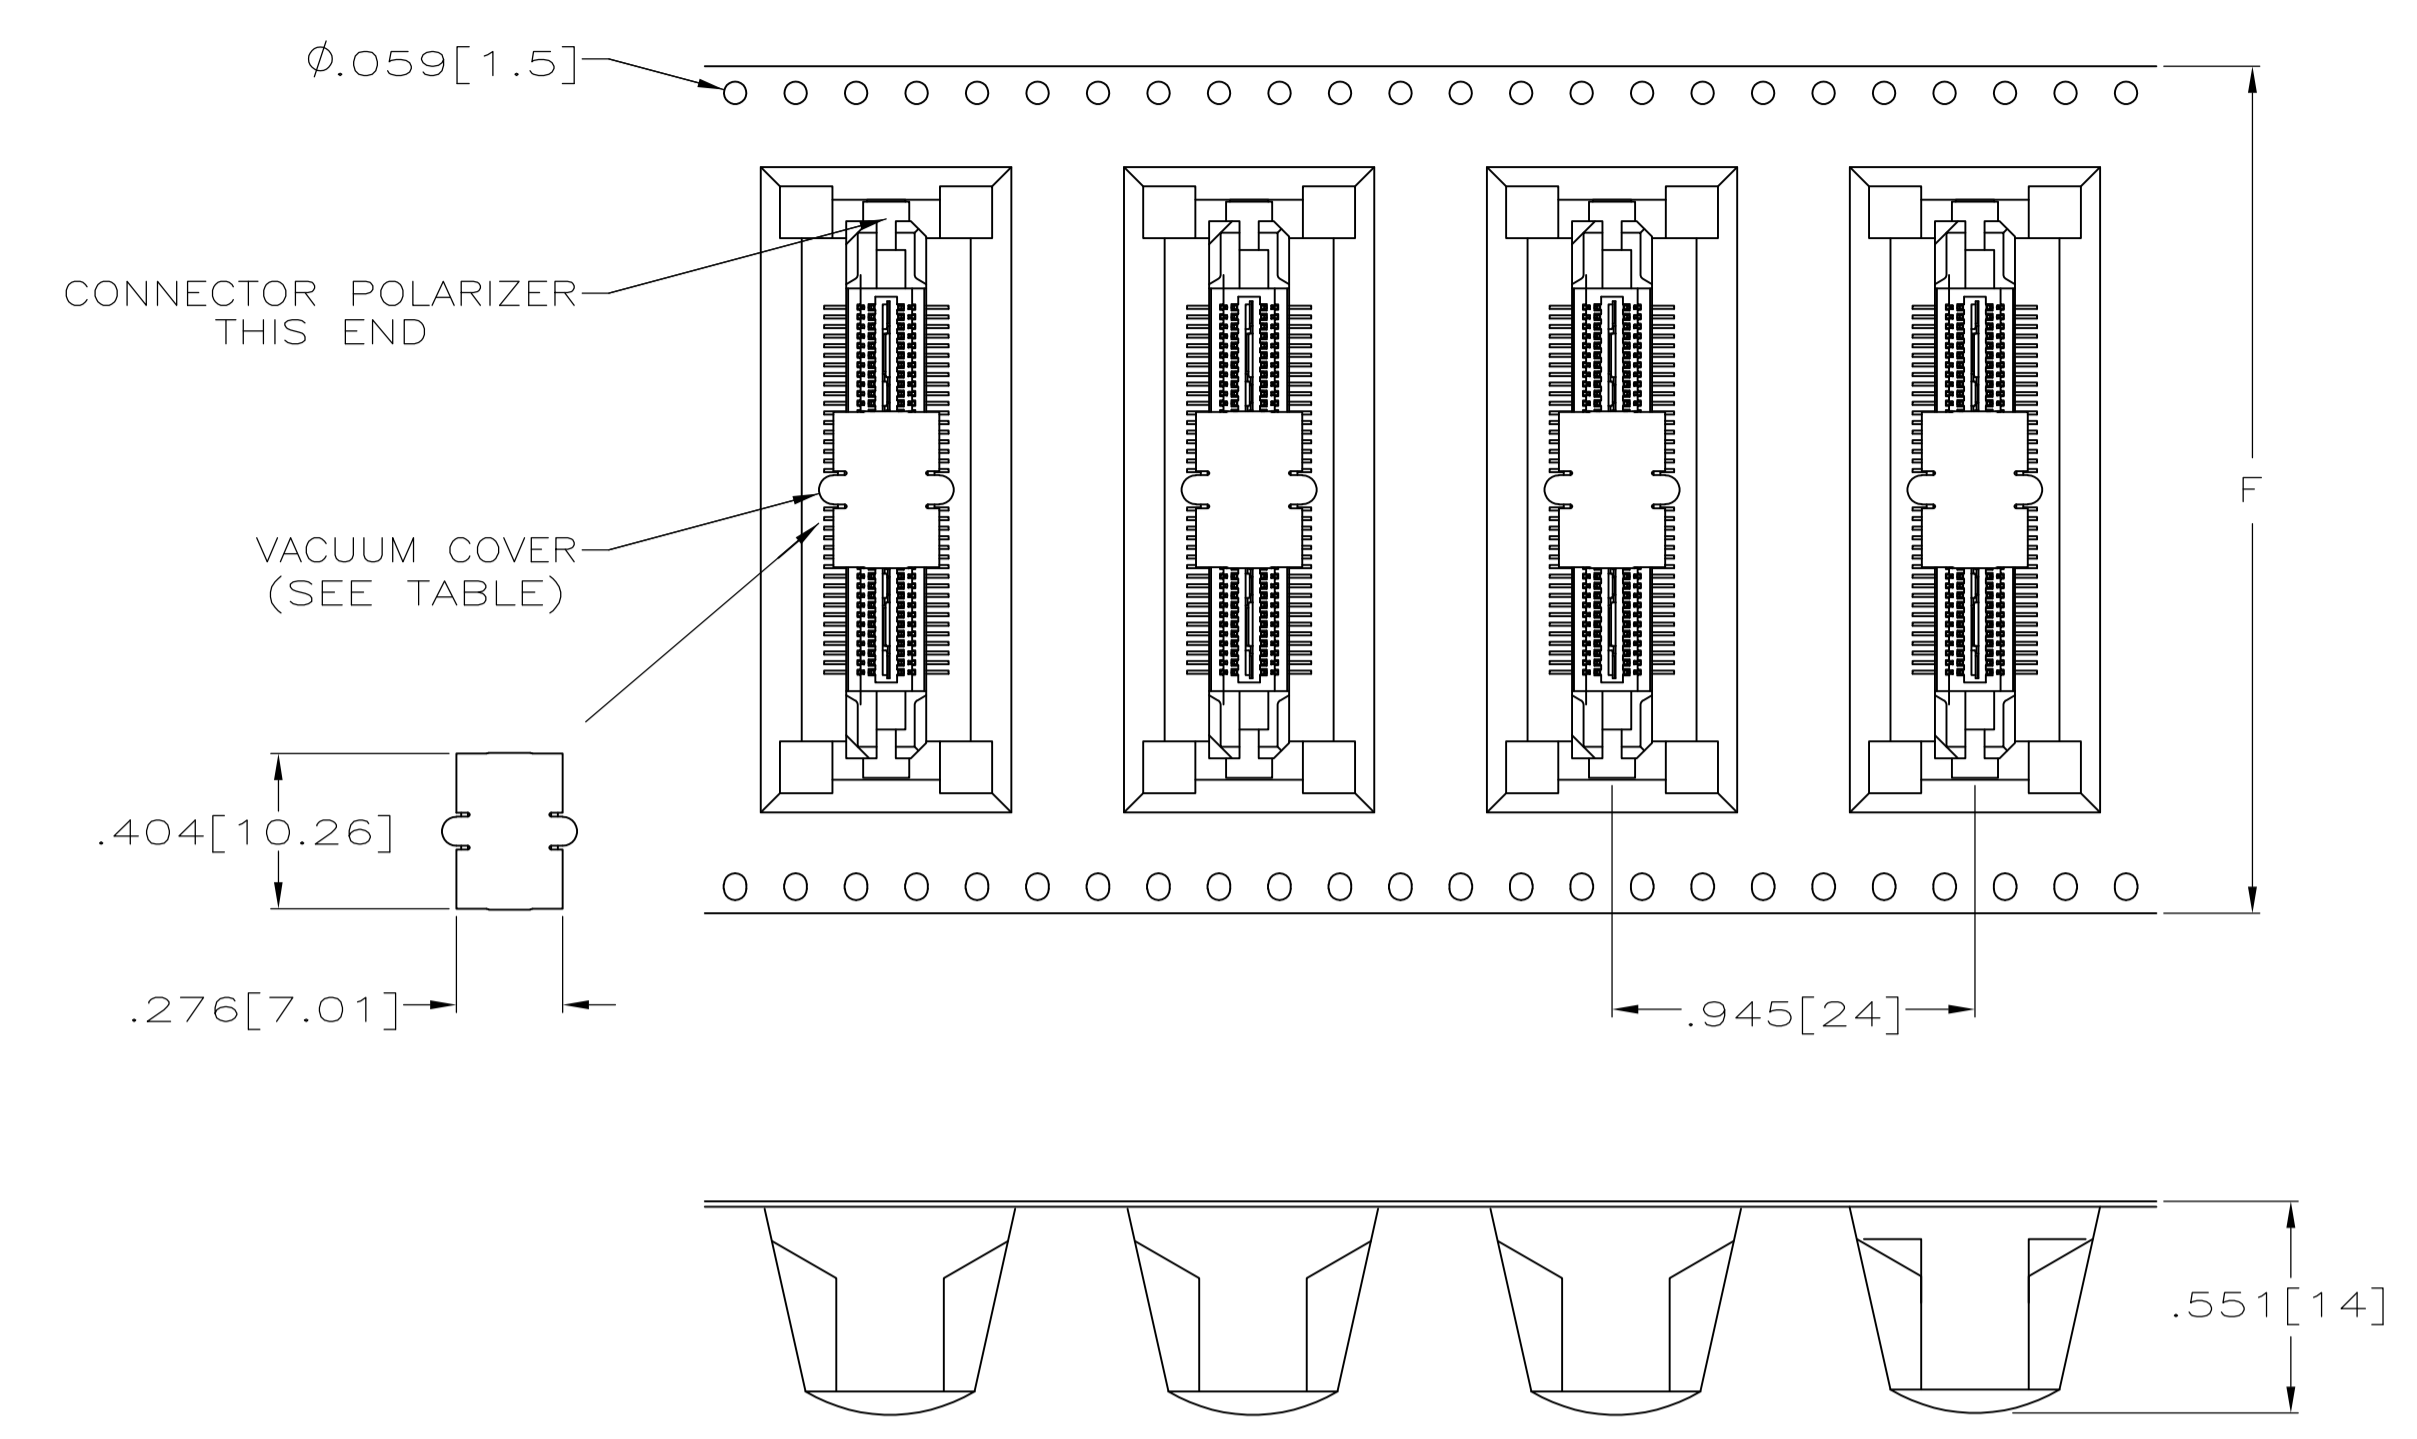

PACKAGING DETAIL Δ
SCALE 2:1
DIMENSIONS ARE FOR REFERENCE

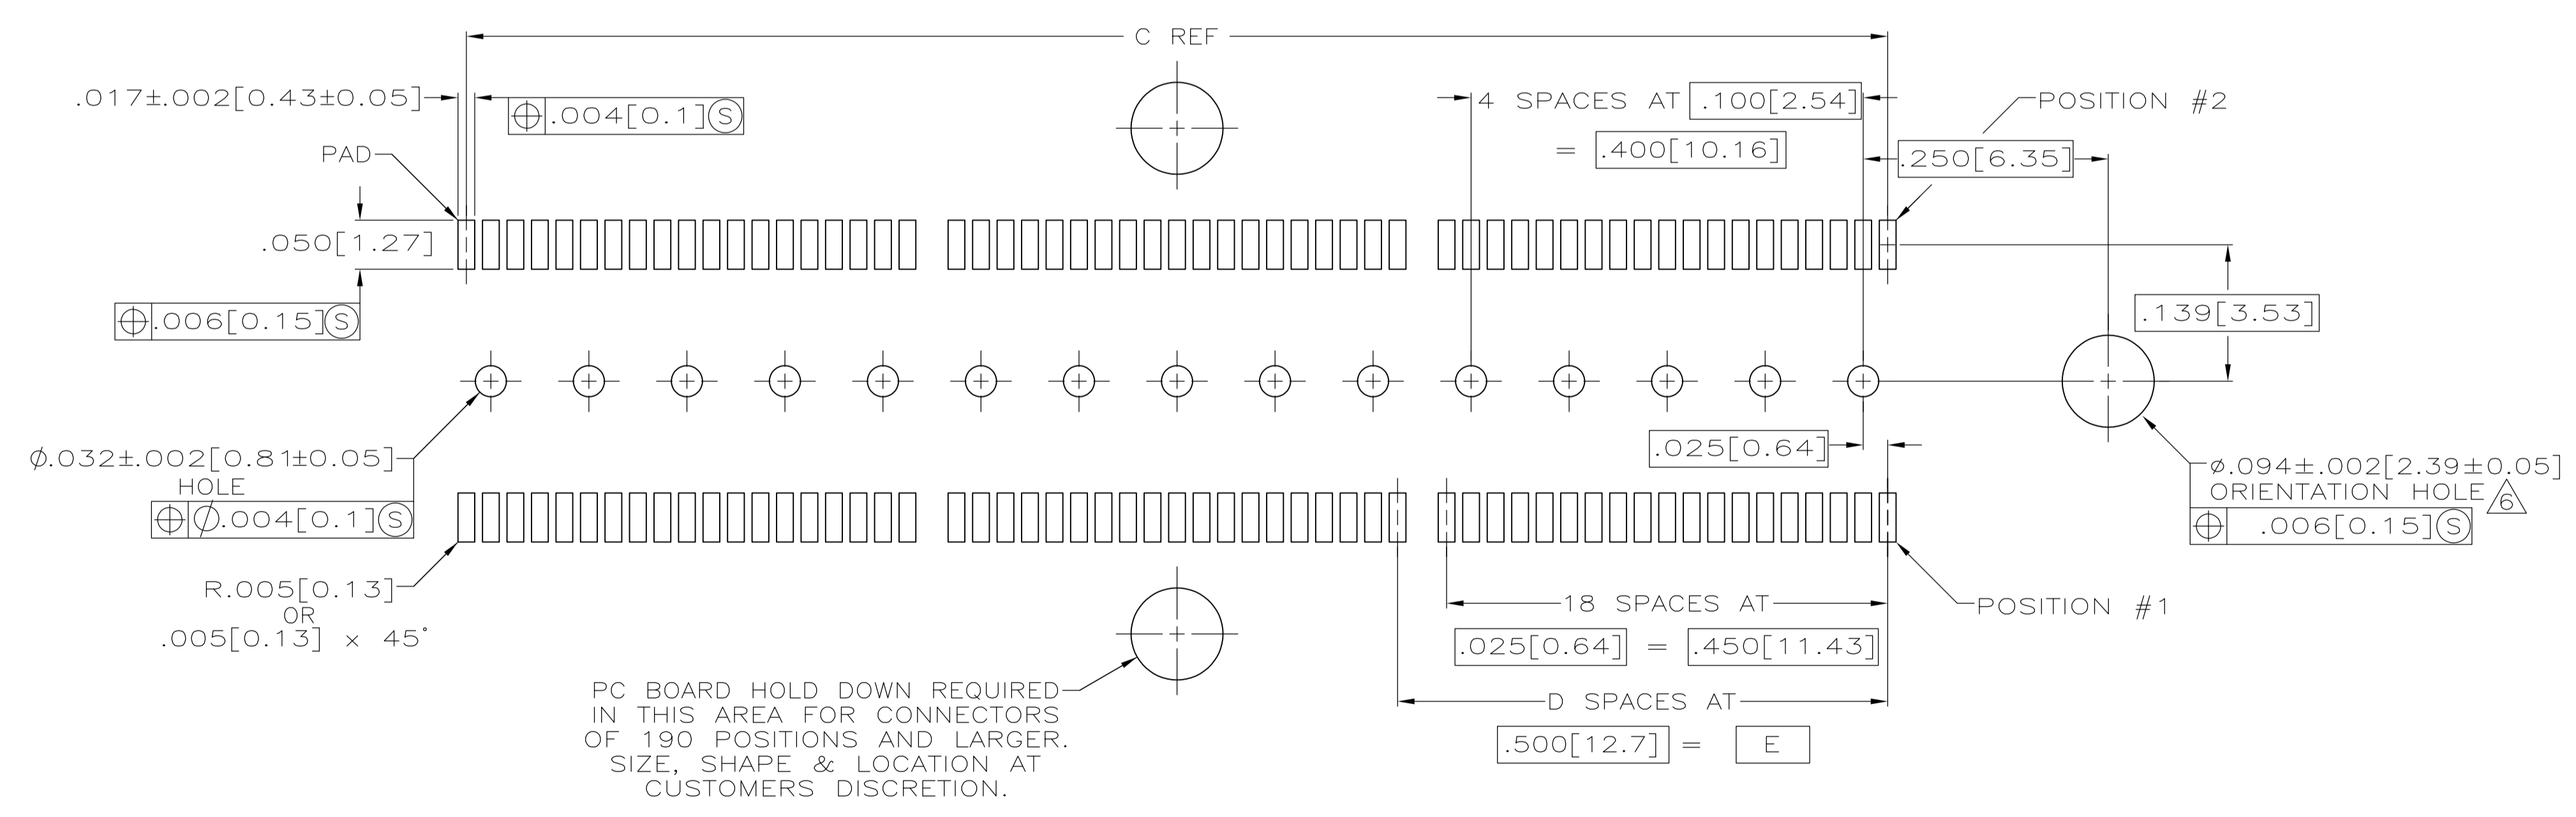

RECOMMENDED PC BOARD LAYOUT
(VIEWED FROM CONNECTOR SIDE)

| | | | |
|--|---|--|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN G. ATTADIA 27 OCT 04 CHK D. DIXON 27 OCT 04 APP'D D. DIXON 27 OCT 04 | TE Connectivity |
| DIMENSIONS: INCHES | TOLERANCES UNLESS OTHERWISE SPECIFIED: 0. PLC ± - 1. PLC ± - 2. PLC ± - 3. PLC ± .005(0.13) 4. PLC ± - ANGLES ± - | NAME PLUG ASSEMBLY, .495[12.57] VERTICAL, .025[0.64]CL, GULL WING LEADS, POCKET TAPE PACKAGED, MICTOR | SIZE A1 |
| MATERIAL | FINISH | APPLICATION SPEC WEIGHT CUSTOMER DRAWING | DRAWING NO 5767121 SCALE 8:1 SHEET 2 OF 2 REV B2 |

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)