

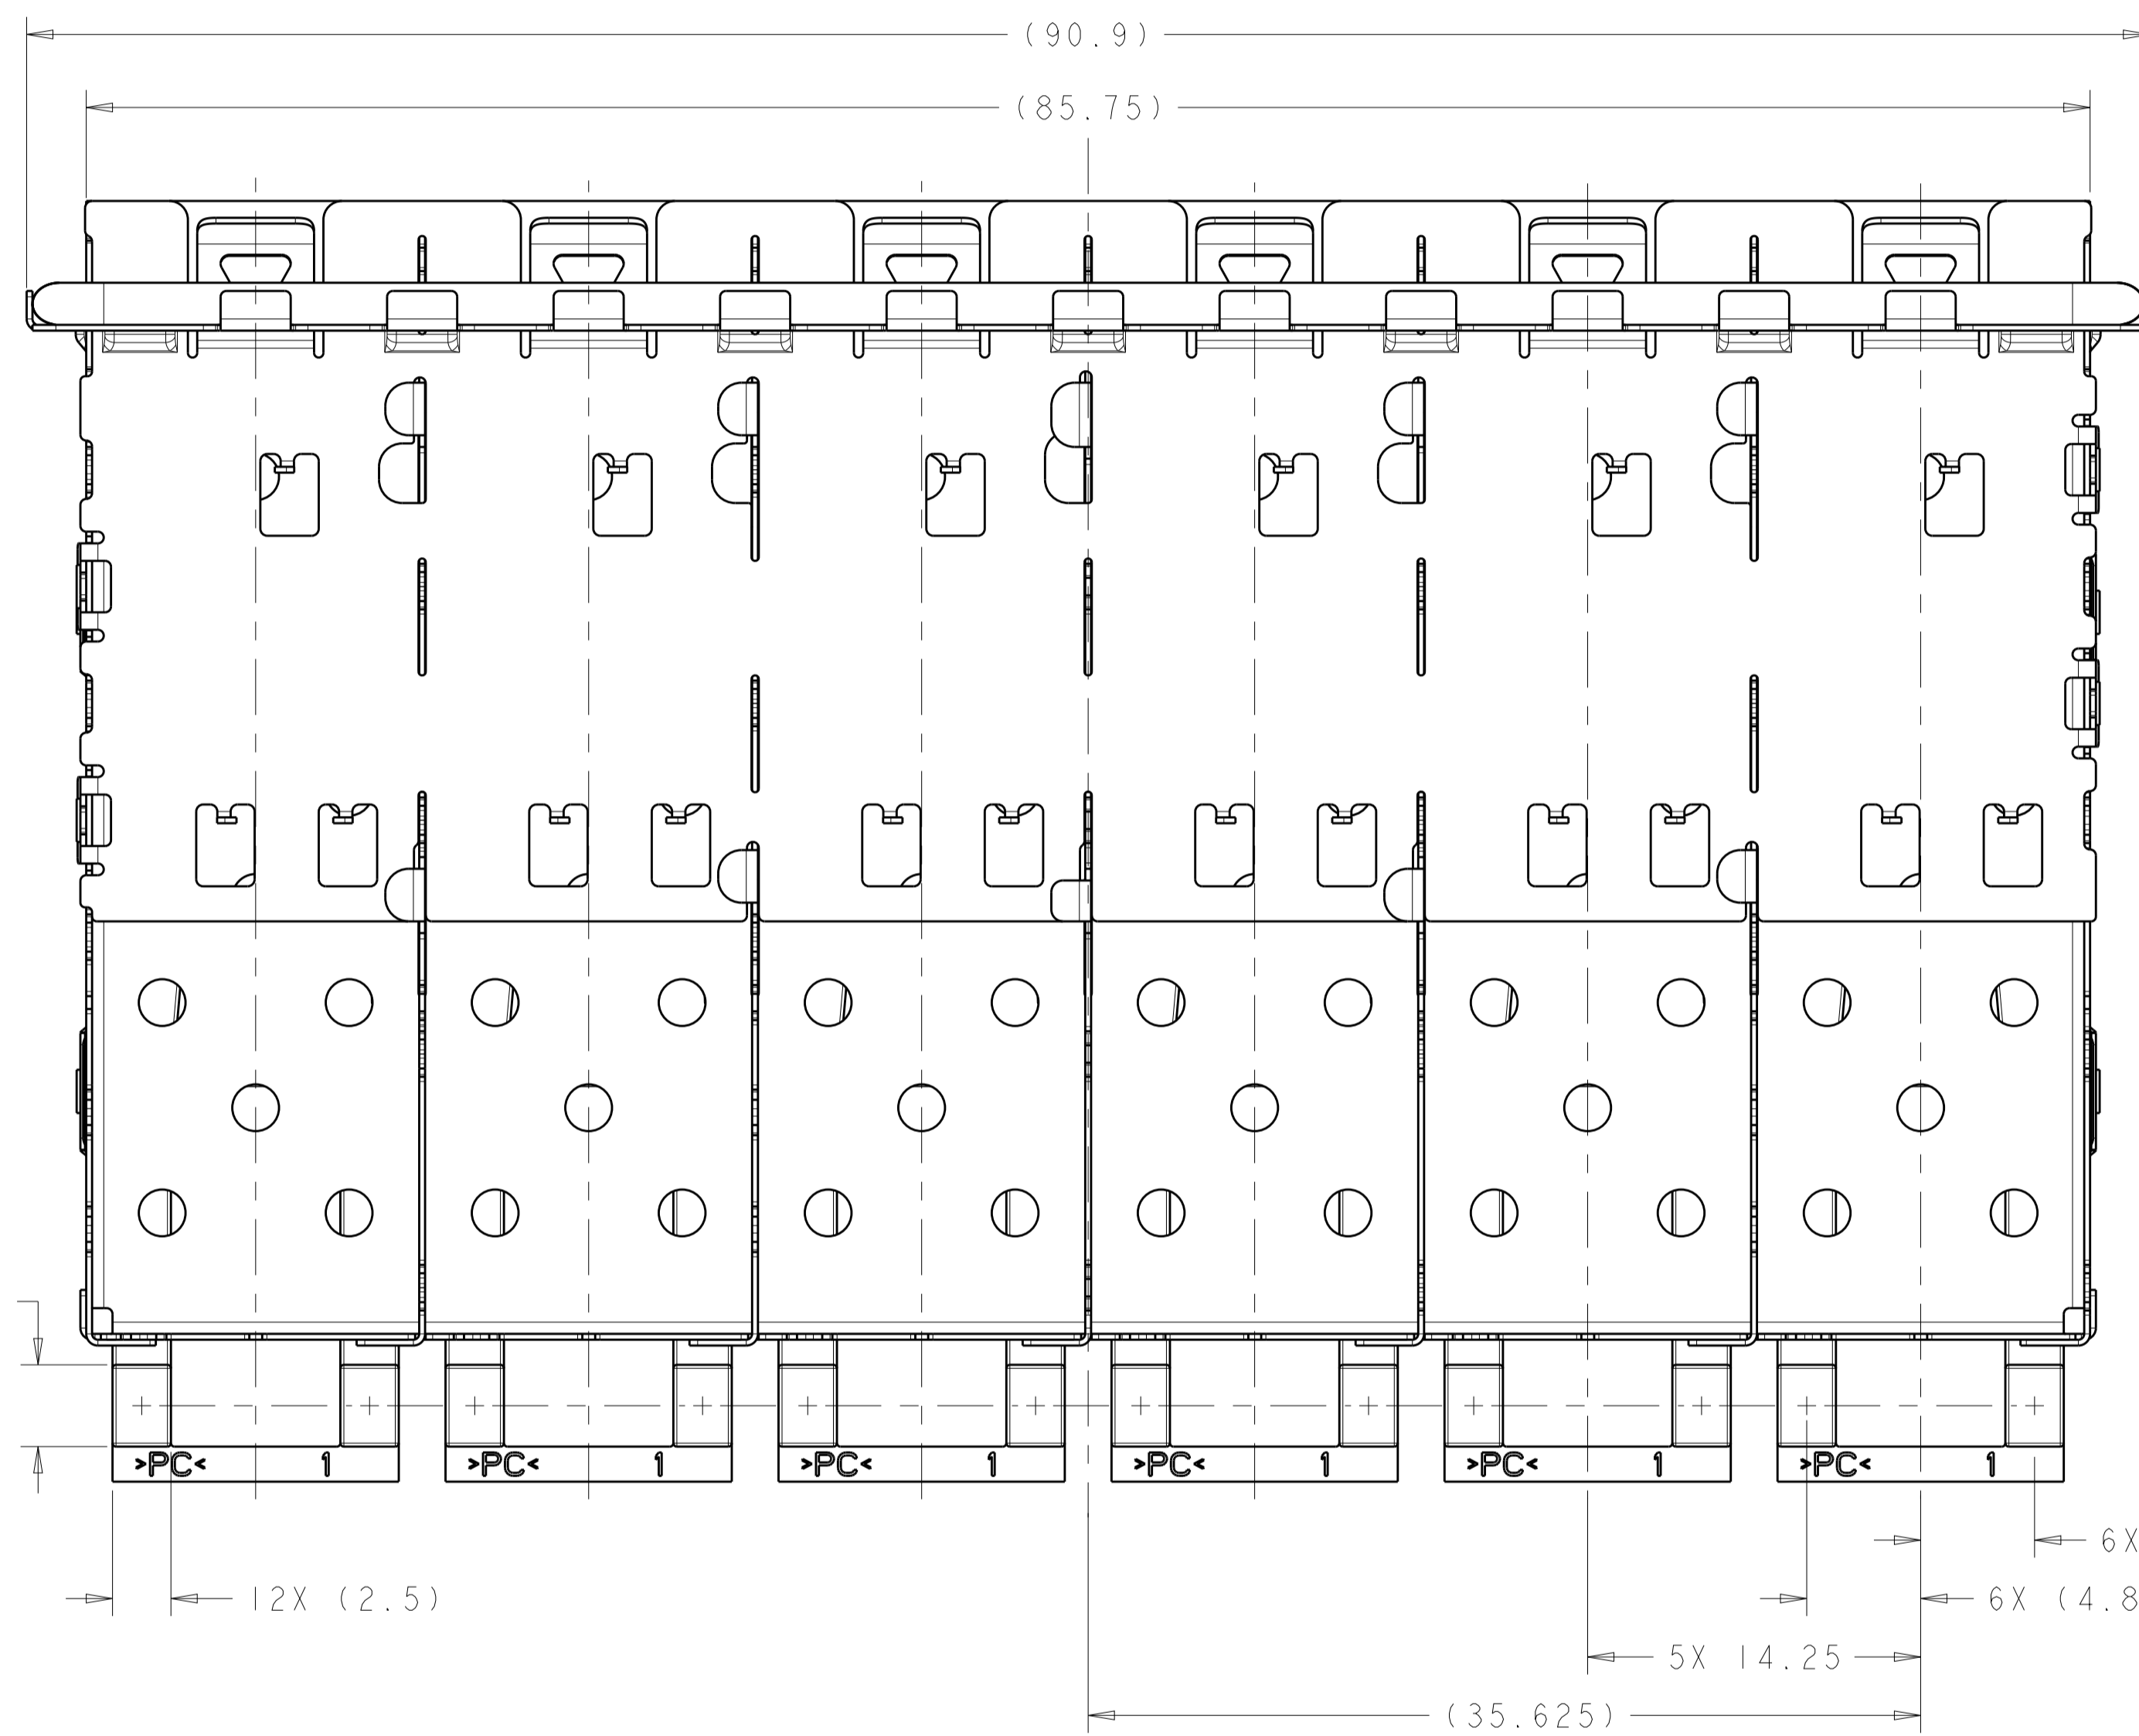
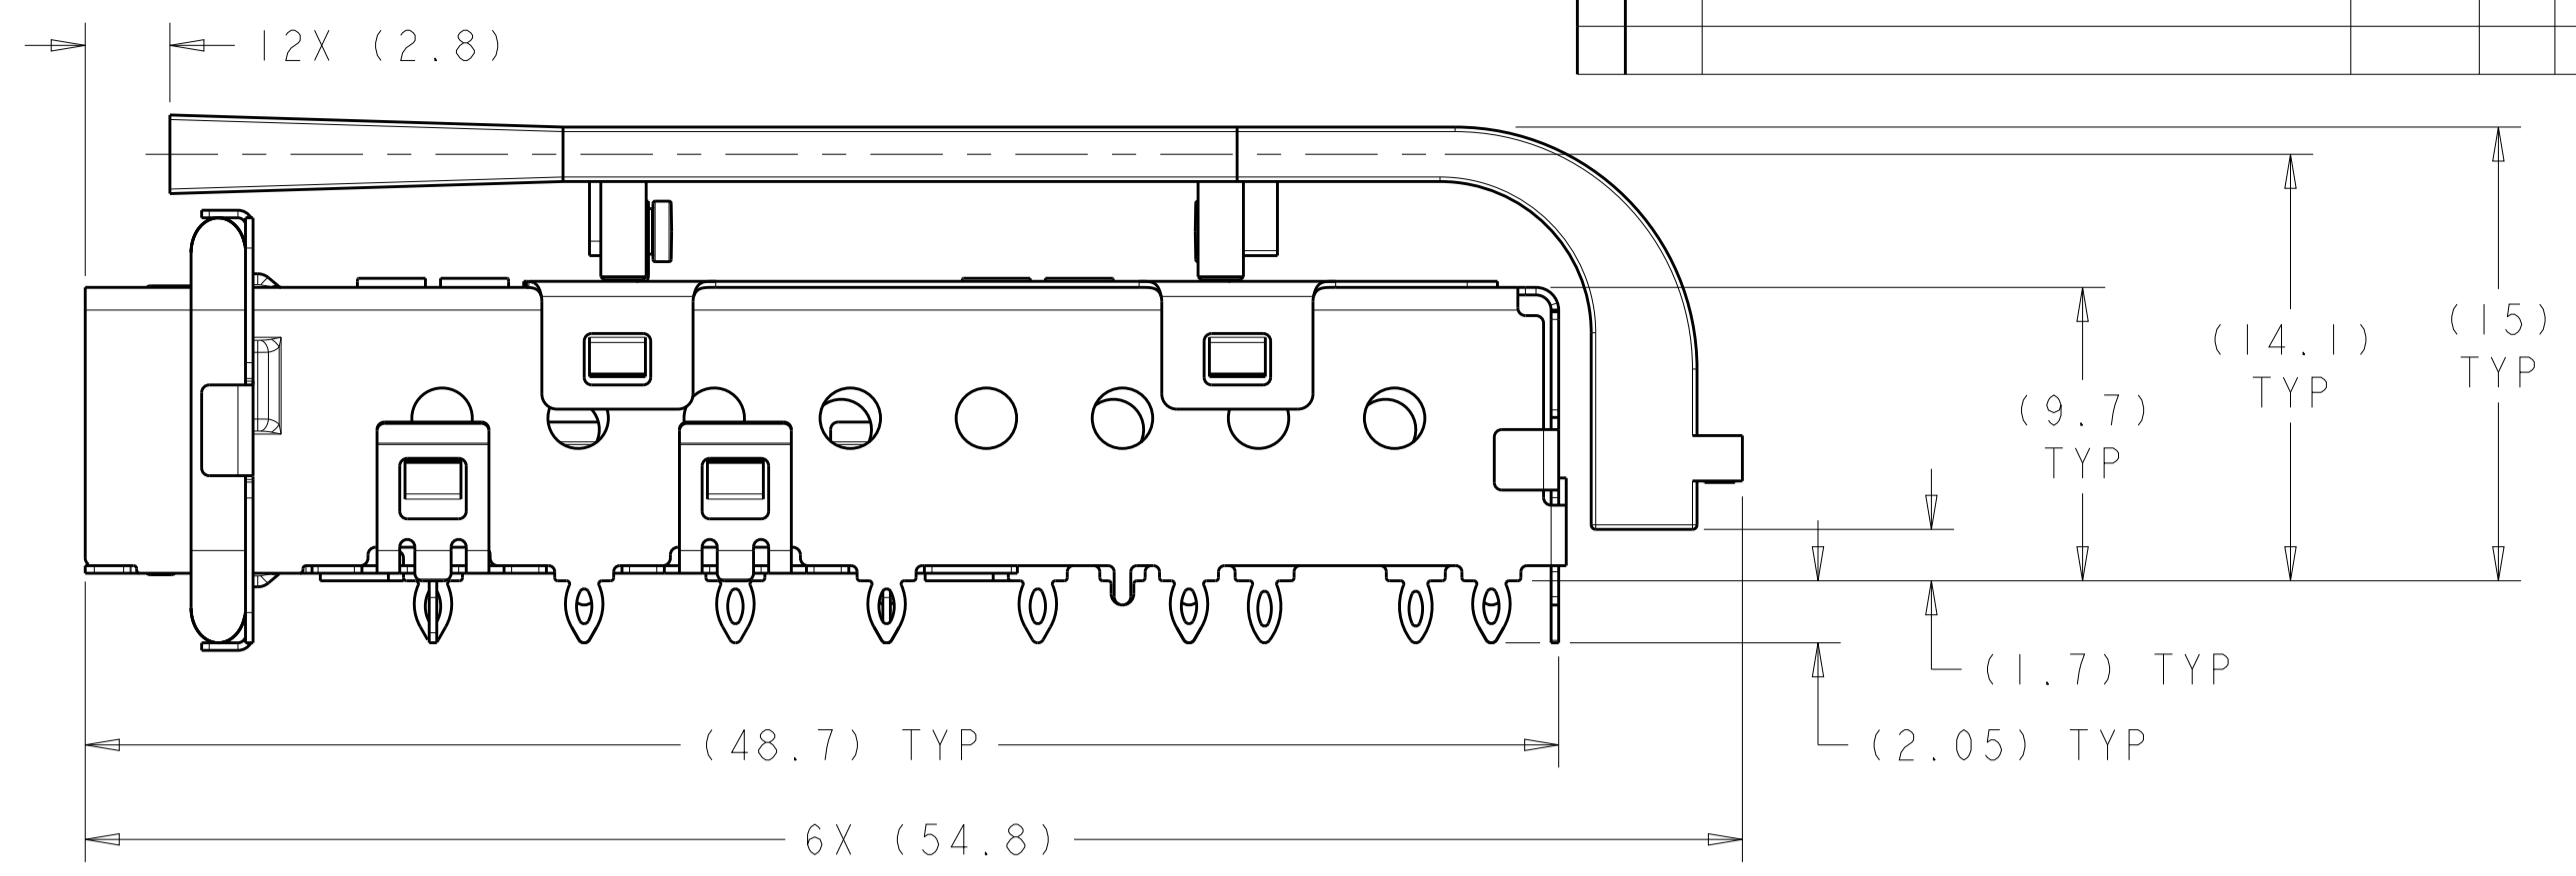


LOC		DIST		REVISIONS			
GP	00	P	LTN	DESCRIPTION	DATE	DMN	APVD
		D		REVISED PER ECO-12-014021	10DEC2012	JY	AC

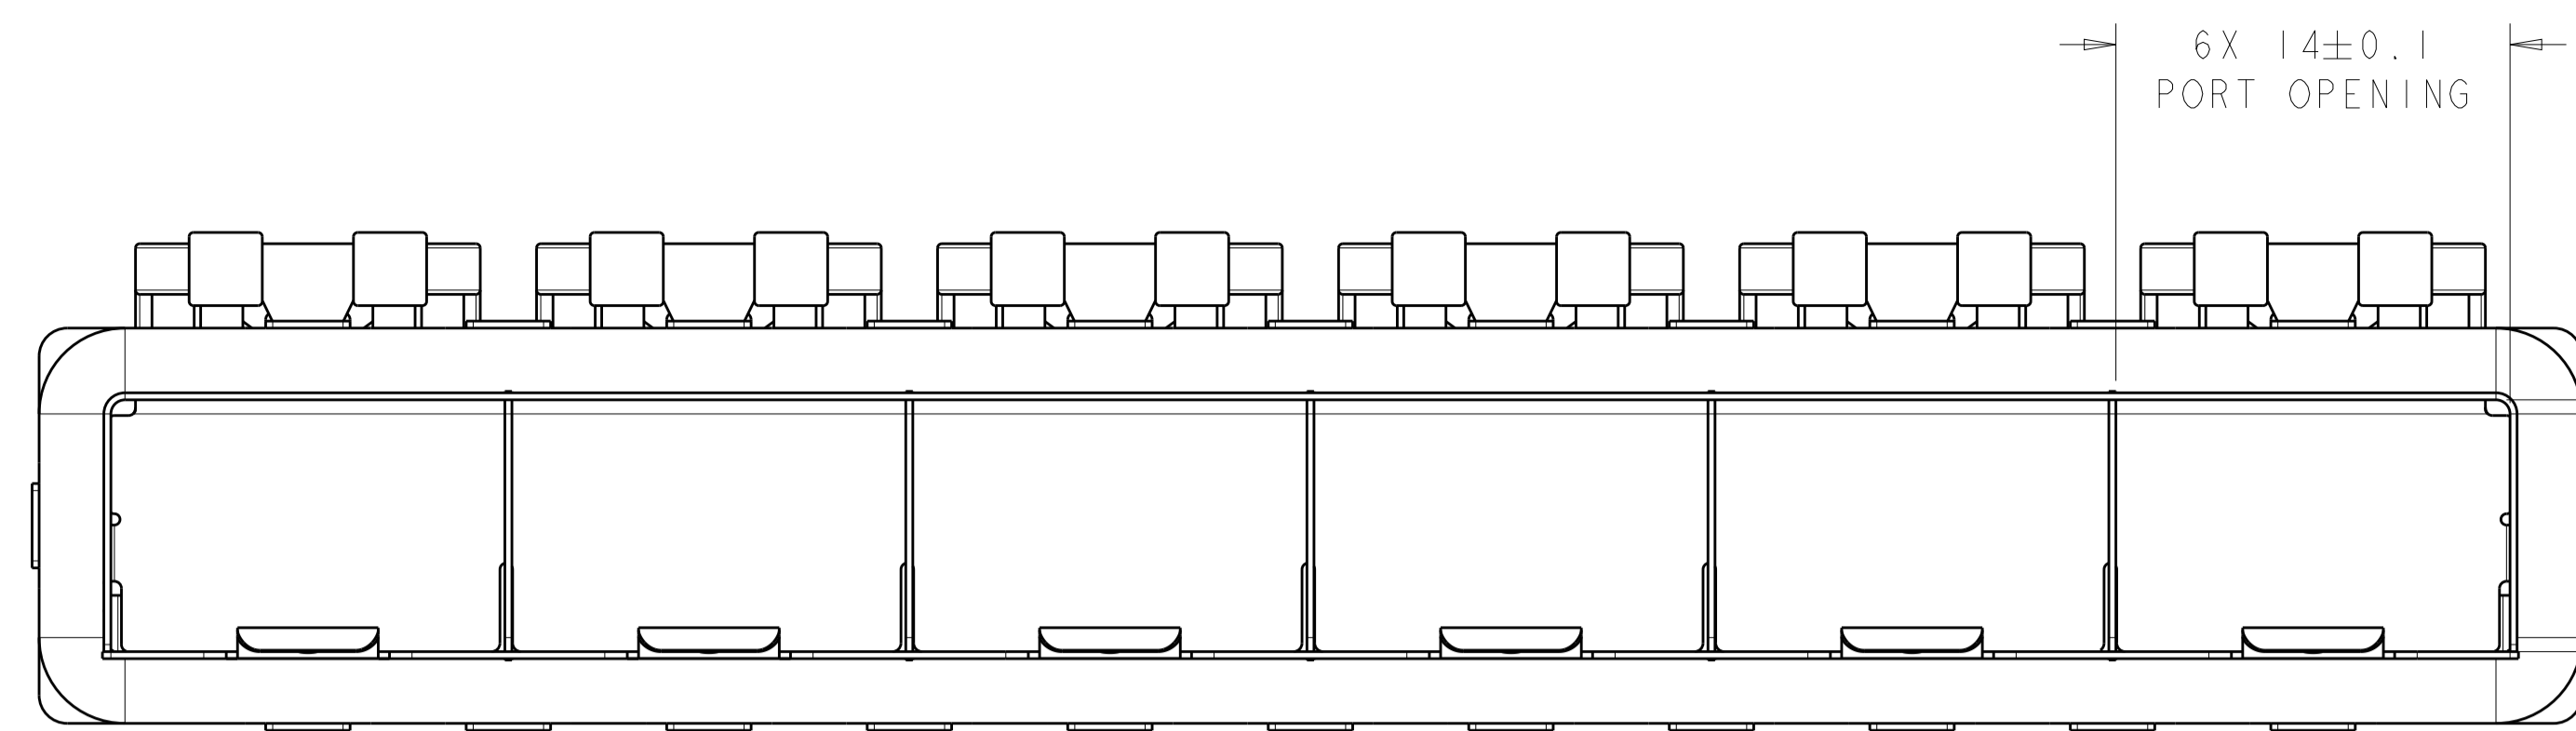

- △ MATERIAL:  
 CAGE ASSEMBLY: 0.25mm THICK NICKEL SILVER ALLOY  
 GASKET RETENTION PLATE: STAINLESS STEEL  
 GASKET: PLATED FILLED SILICONE  
 LIGHT PIPE BRACKET: STAINLESS STEEL  
 LIGHT PIPE: POLYCARBONATE, CLEAR
- △ LIGHT PIPE ASSEMBLY SHIPPED UNASSEMBLED TO CAGE ASSEMBLY. CAGE ASSEMBLY TO BE PRESSED INTO THE PCB PRIOR TO ATTACHING THE LIGHT PIPE ASSEMBLY TO THE CAGE.
- 3. MATES WITH SFP MSA COMPLIANT TRANSCEIVERS.
- △ PADS AND VIAS CHASSIS GROUND.
- 5. INTERPRETATION OF DATUM REFERENCE FRAME IN ACCORDANCE WITH SECT 4.4.1.1 OF ASME Y14.5M-1994.
- △ MINIMUM PC BOARD THICKNESS = 1.50mm.
- △ HOLE PATTERN REPEATS FOR EACH PORT. SPACING BETWEEN PORTS IS 14.25mm.
- △ DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER.
- △ REFERENCE APPLICATION SPEC. 114-13120, HOLE A, FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS.
- △ REFERENCE APPLICATION SPEC. 114-13120, HOLE B, FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS.
- 11. PRODUCT COMPLIES WITH SPECIFICATION SFF-8433 IMPROVED PLUGGABLE FORM FACTOR FOR SFP+ GANGED CAGES.

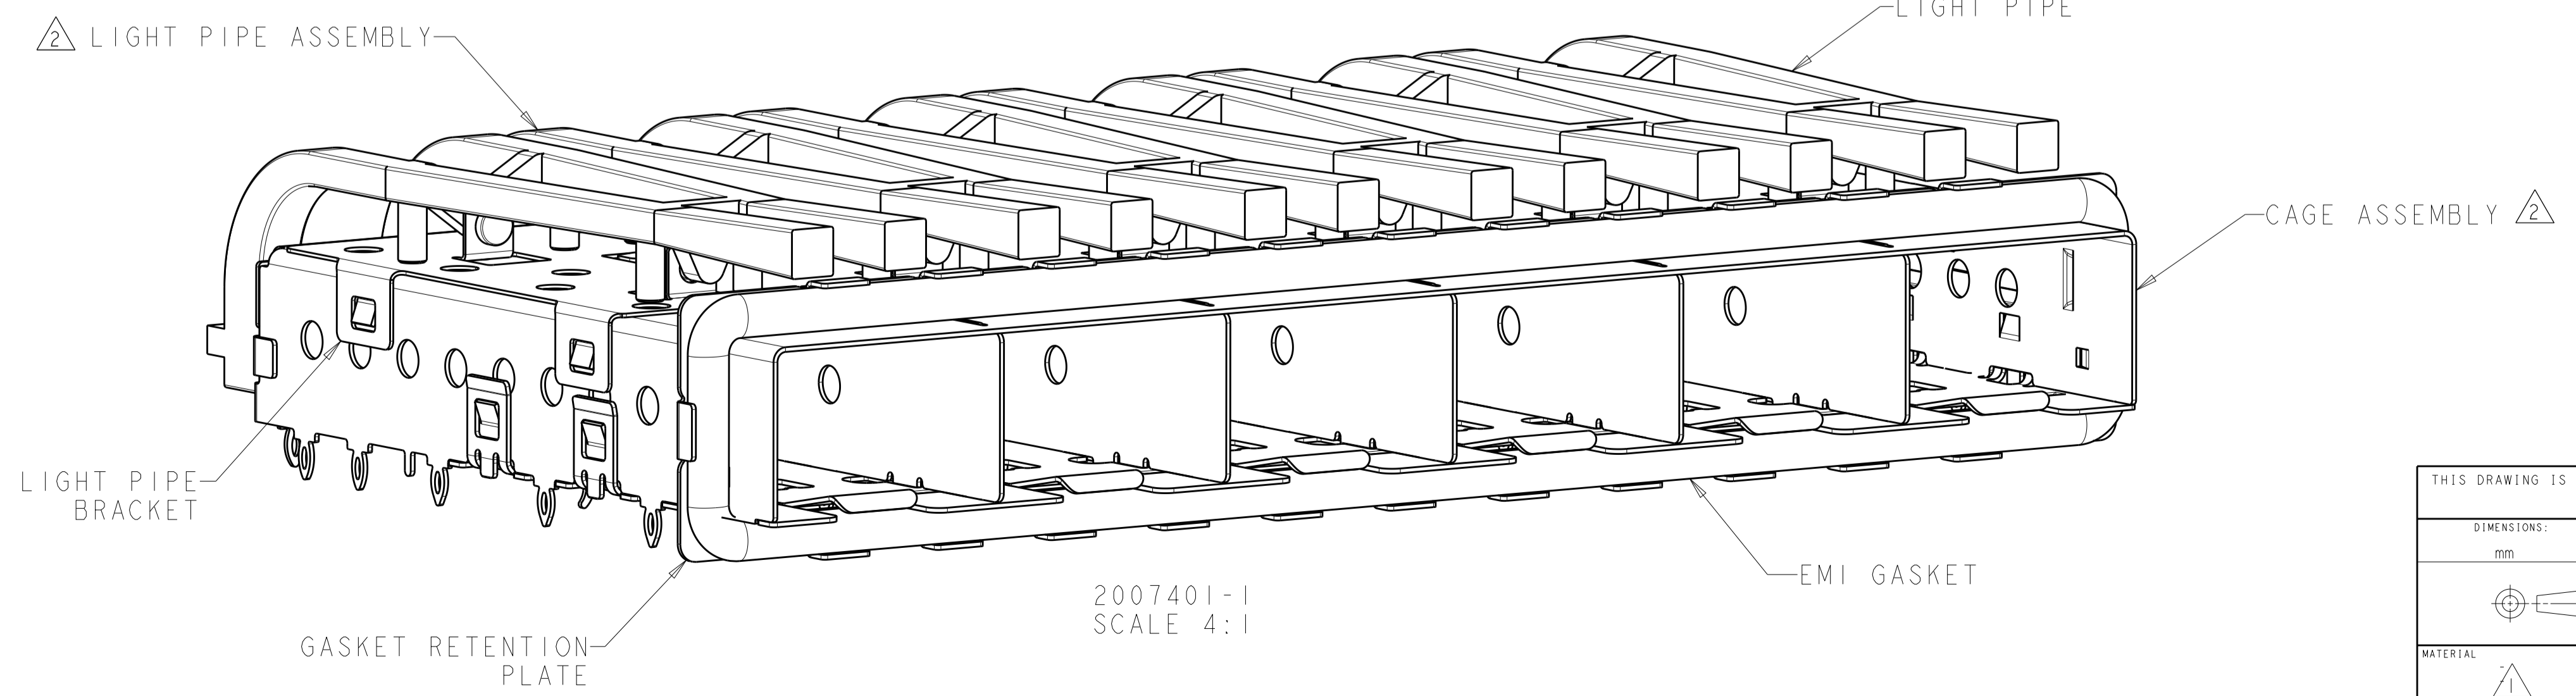


2007401-1  
 SCALE 4:1


2007401-1  
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN: Z.M.BEAM 25OCT2007	TE Connectivity
DIMENSIONS: mm		CHK: M.R.SCHMITT 25OCT2007	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: R.H.WERTZ 25OCT2007	
0 PLC ±0.1 1 PLC ±0.1 2 PLC ±0.1 3 PLC ±0.1 4 PLC ±0.1 ANGLES ±1°		NAME: SFP+ 1X6 CAGE ASSEMBLY PRODUCT SPEC: 108-2364 APPLICATION SPEC: 114-13120 WEIGHT: - Customer Drawing	
MATERIAL: △		SIZE: A1	CAGE CODE: 00779 DRAWING NO: C=2007401 SCALE: 4:1 SHEET: 1 OF 3 REV: D


LOC		DIST		REVISIONS			
P	LTN	DESCRIPTION	DATE	DMN	APVD		
-	-	SEE SHEET 1	-	-	-		

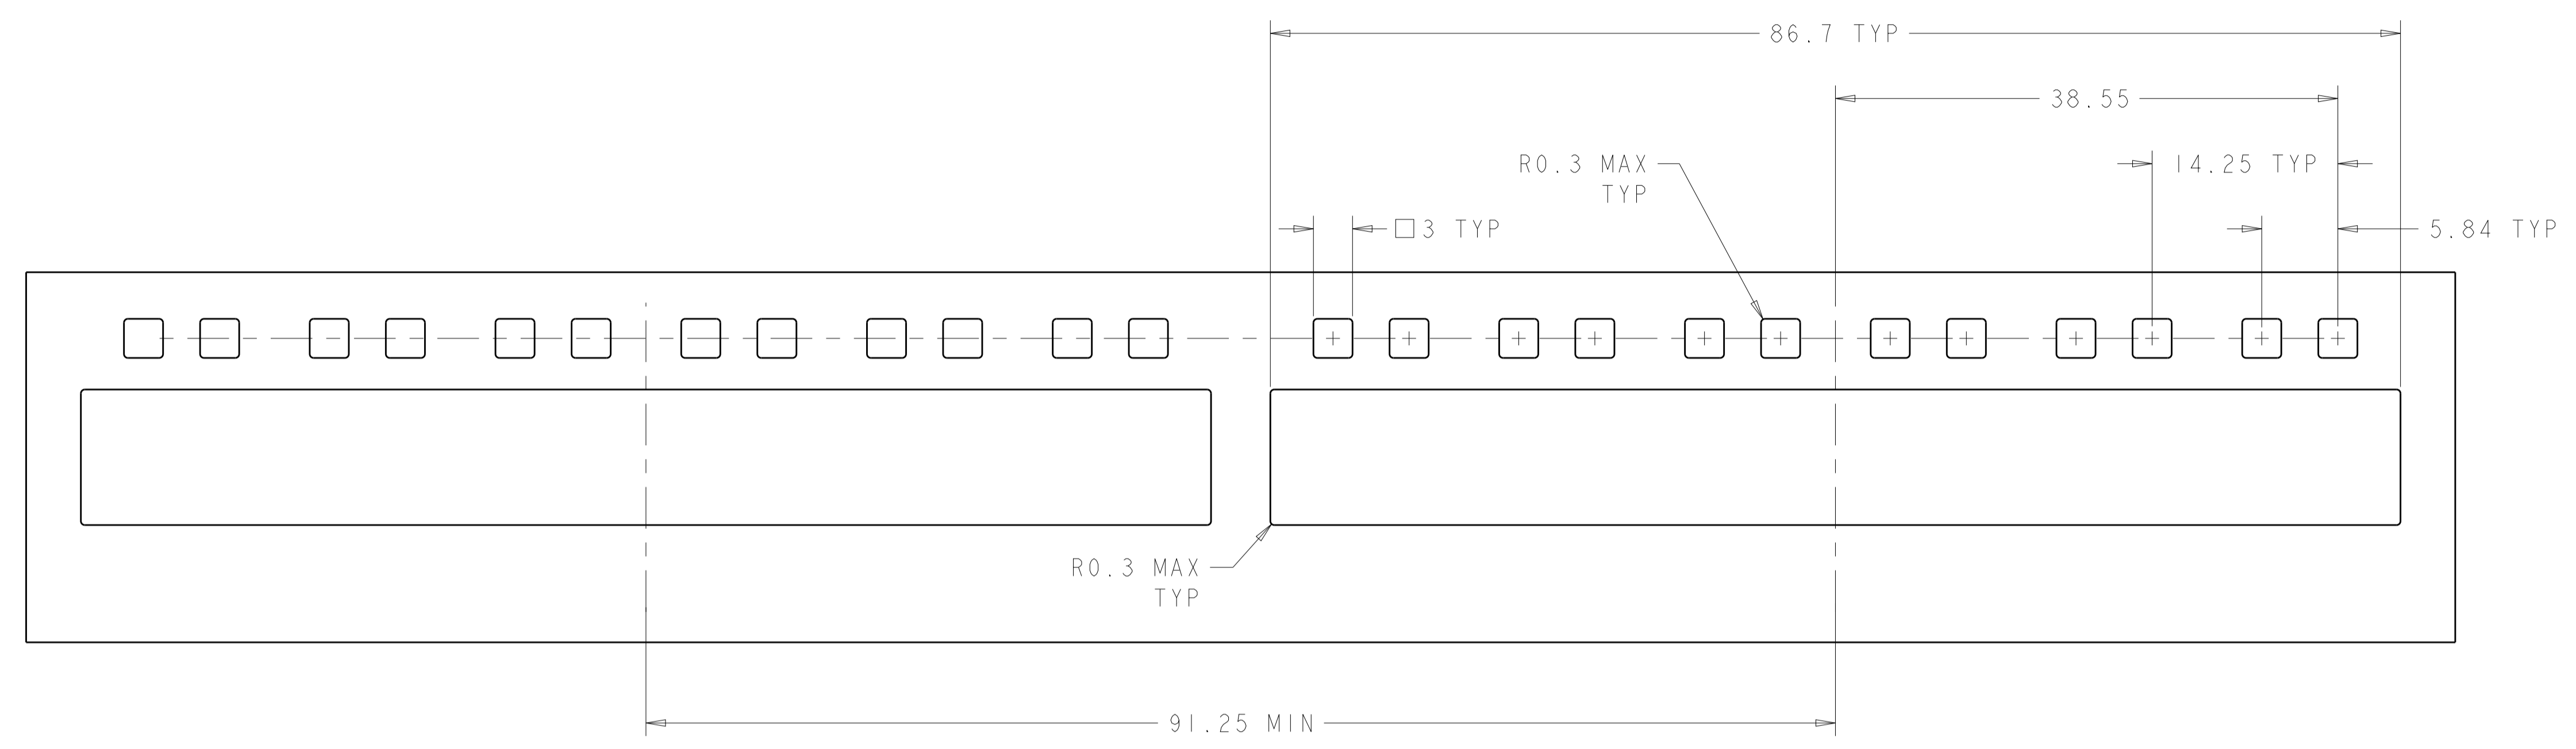

RECOMMENDED BEZEL CUTOUT  
 SCALE 3:1

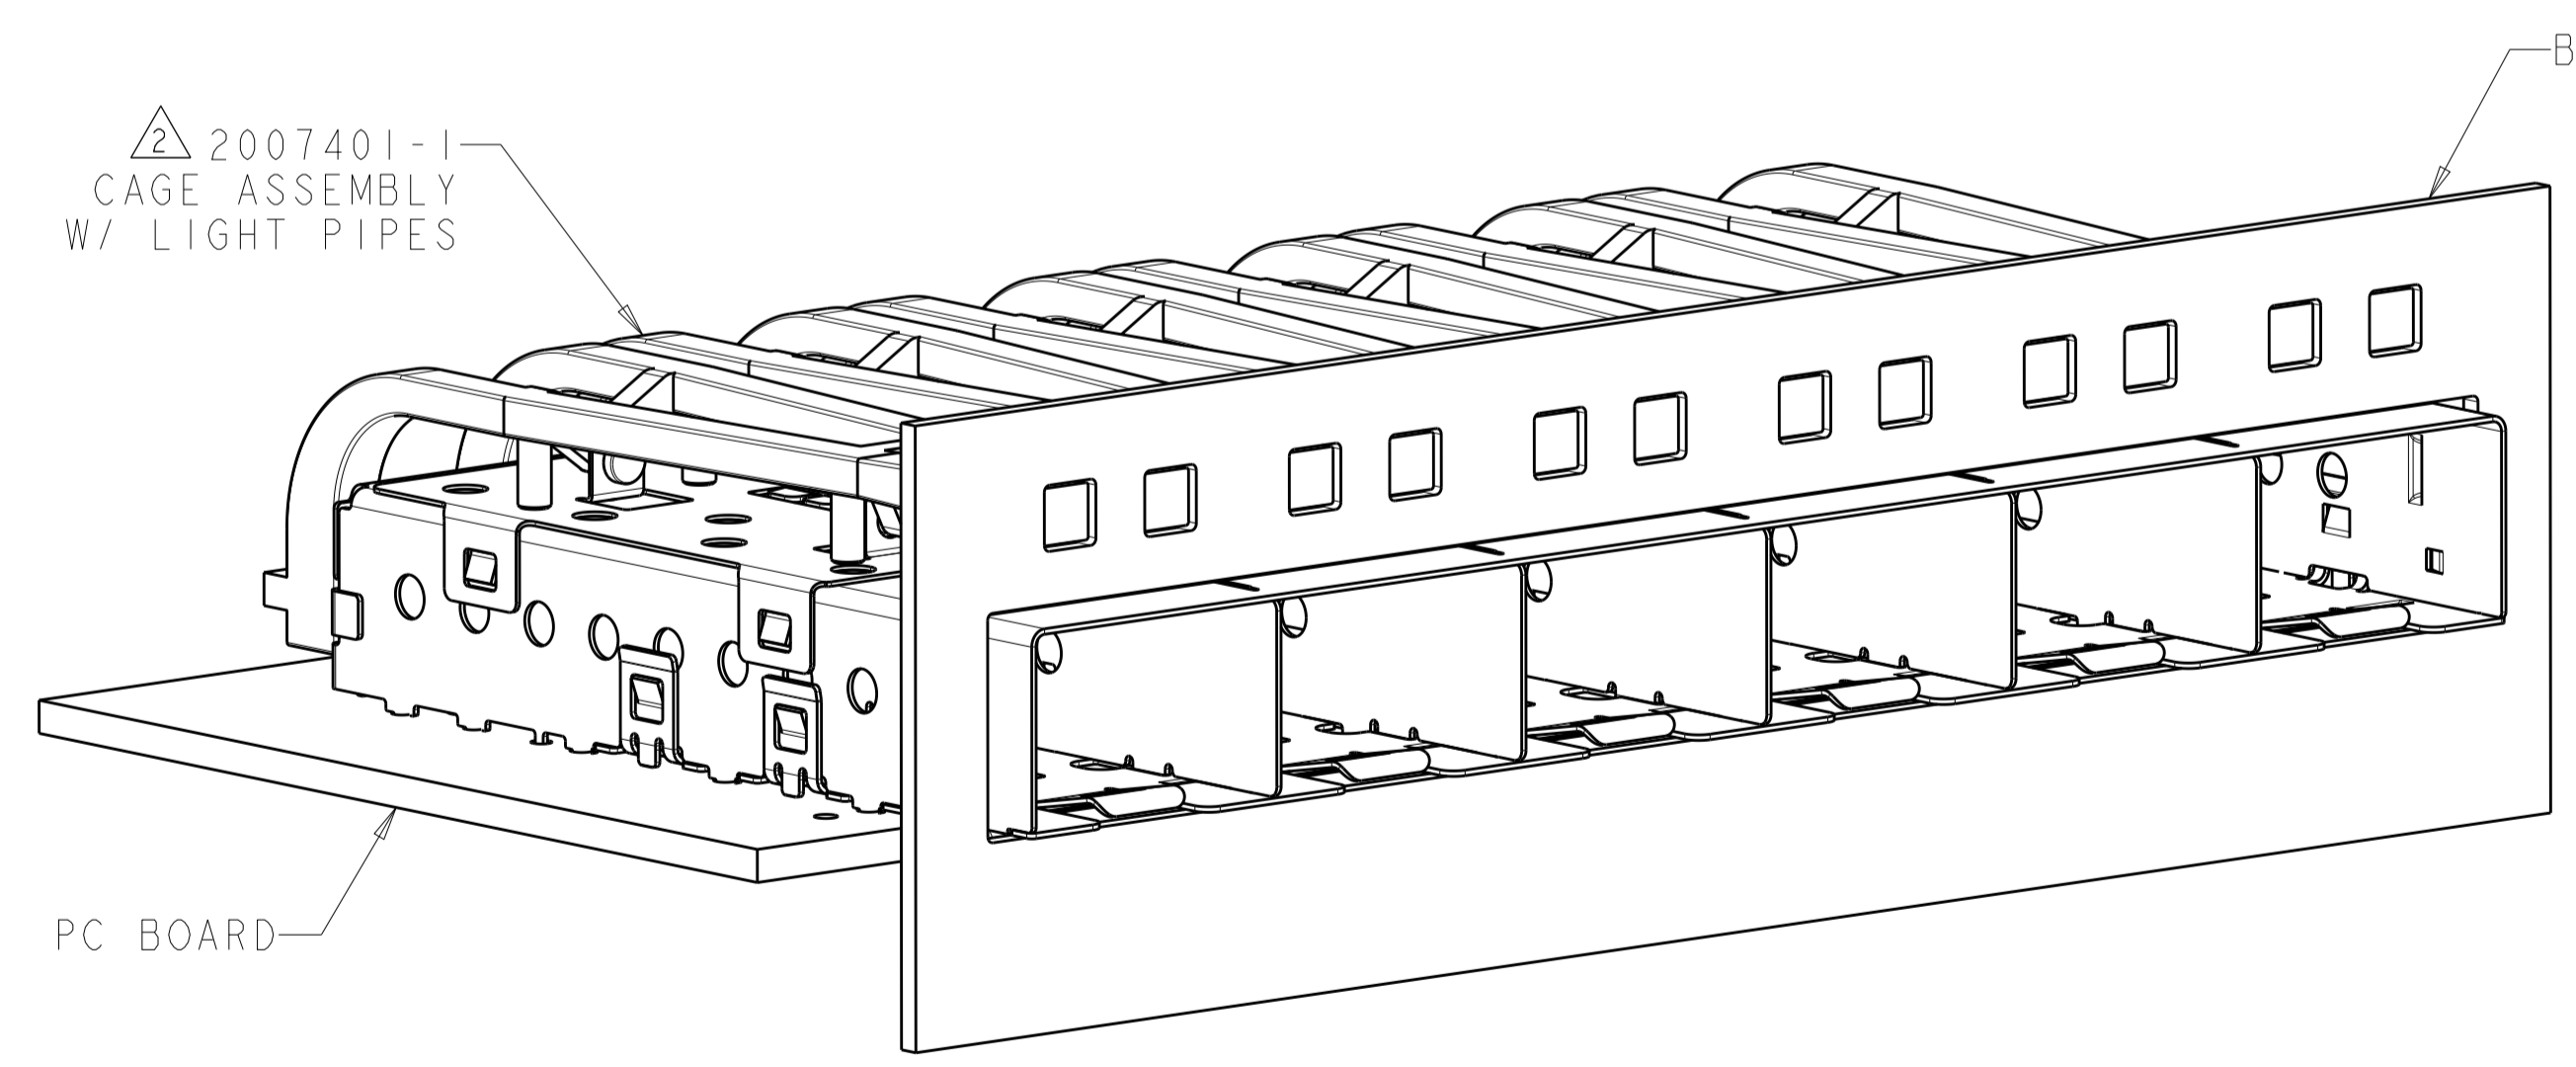

2007401-1  
 MOUNTED ON PC BOARD SHOWN  
 THRU RECOMMENDED BEZEL  
 SCALE 3:1

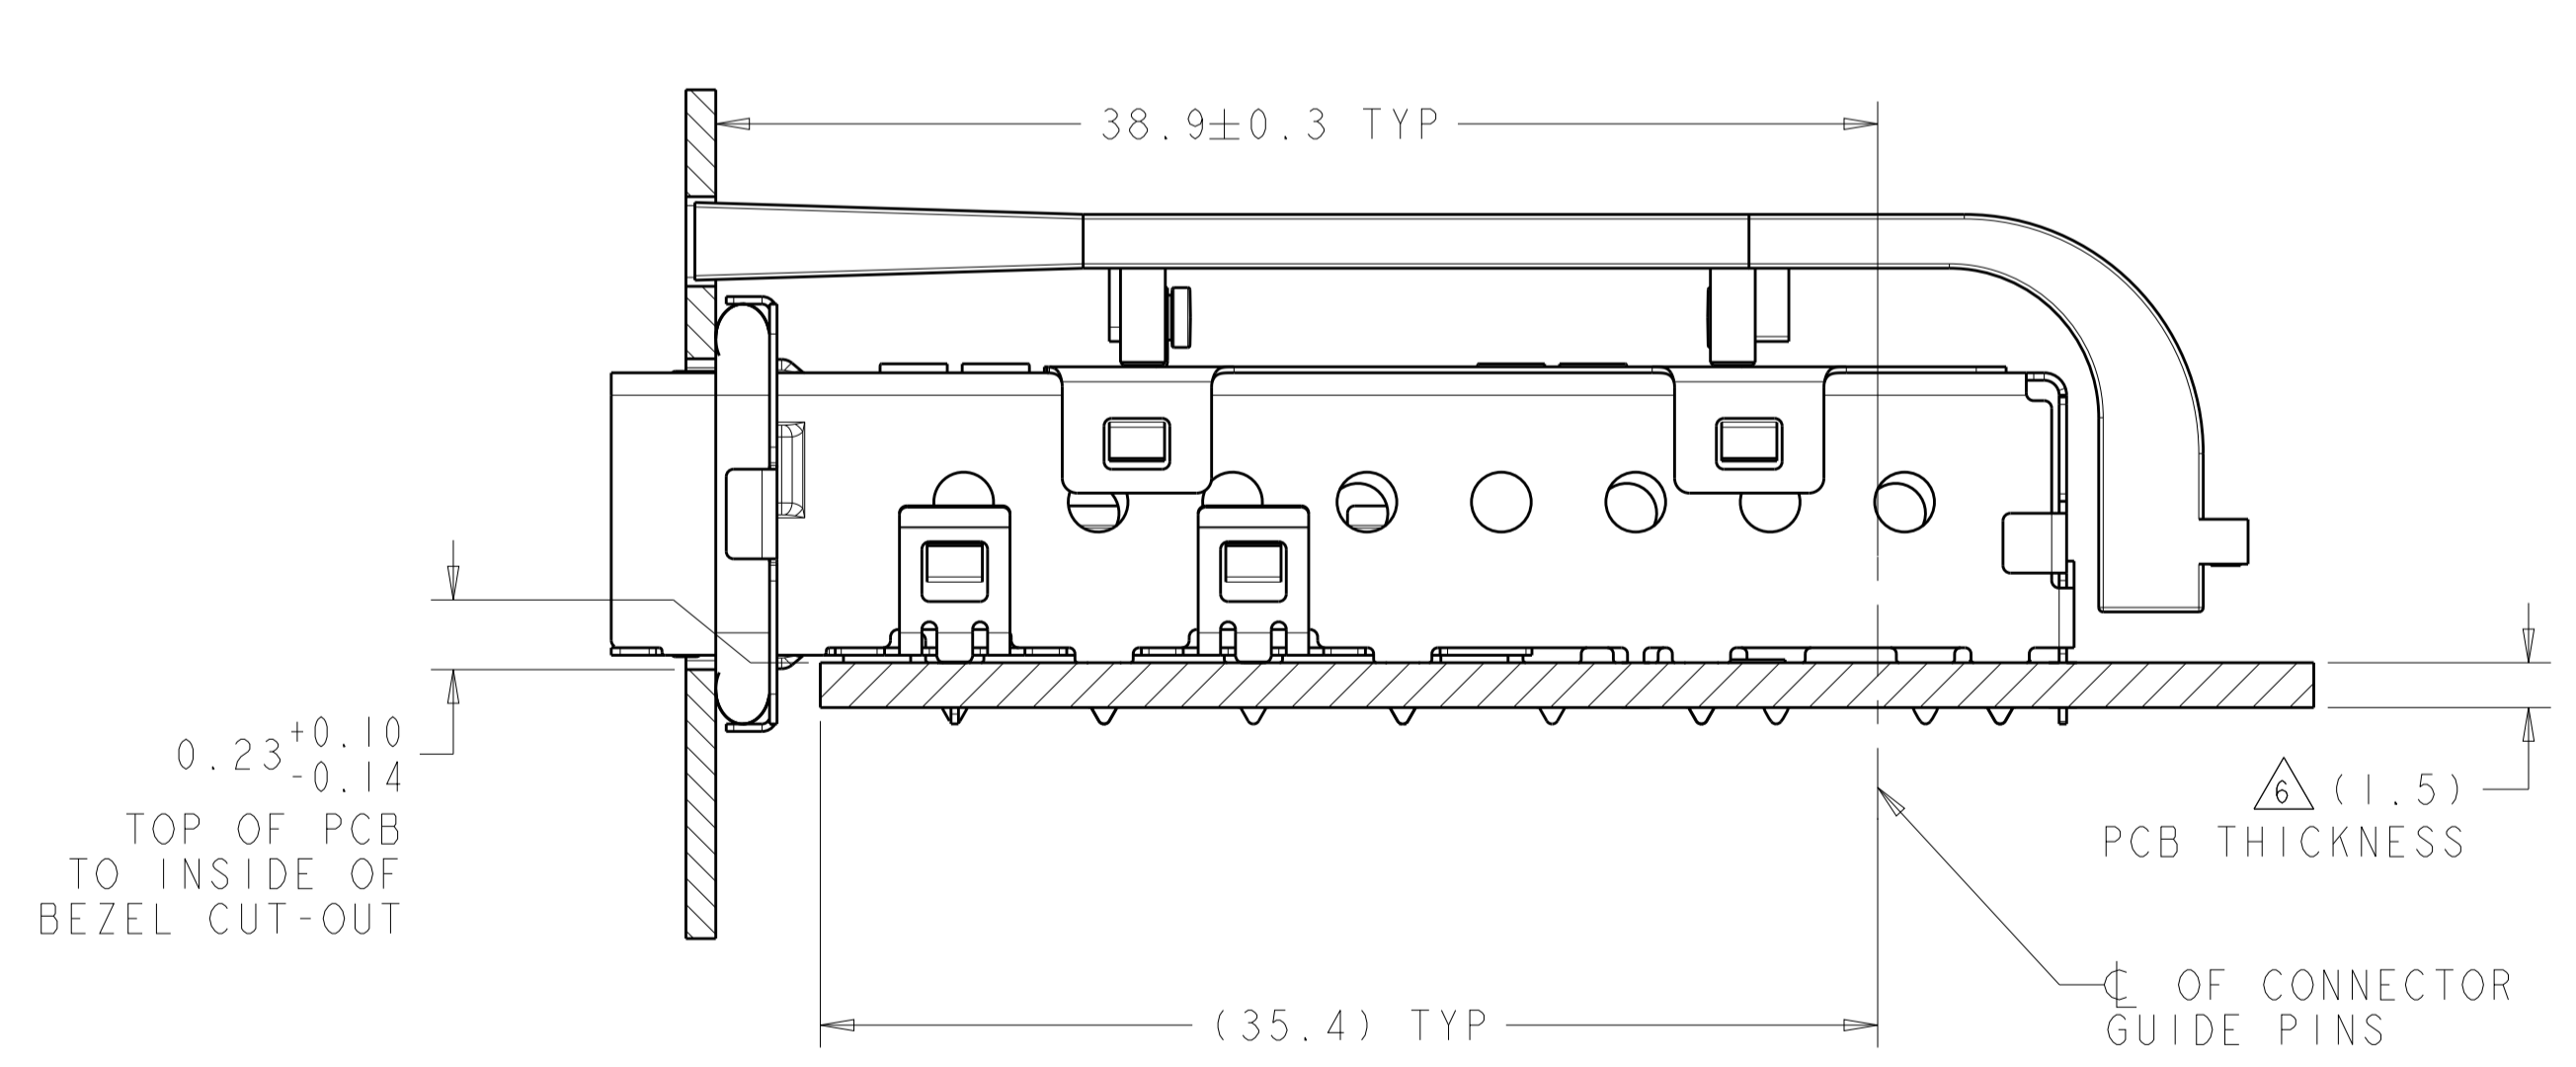



2007401-1  
 MOUNTED ON PC BOARD SHOWN  
 THRU RECOMMENDED BEZEL

THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN	Z. M. BEAM	25OCT2007	<b>STE</b> TE Connectivity
DIMENSIONS:		CHK	M. R. SCHMITT	25OCT2007	
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	R. H. WERTZ	25OCT2007	NAME
0 PLC	±0.1	PRODUCT SPEC		SFP+ 1X6 CAGE ASSEMBLY	
1 PLC	±0.1	APPLICATION SPEC		PRESS FIT, EMI GASKET, W/	
2 PLC	±0.1	108-2364		REDUCED LENGTH SQUARE LIGHT PIPES	
3 PLC	±0.1	114-13120		SIZE	CAGE CODE DRAWING NO
4 PLC	±0.1	WEIGHT		A1	00779C=2007401
ANGLES	±1°	Customer Drawing		SCALE	4:1
MATERIAL	FINISH	Customer Drawing		SHEET	2 OF 3
				REV	D

LOC	DIST	REV	DATE	APPD
GP	00			

REVISIONS				
NO.	DESCRIPTION	DATE	BY	APPD
-	SEE SHEET 1	-	-	-

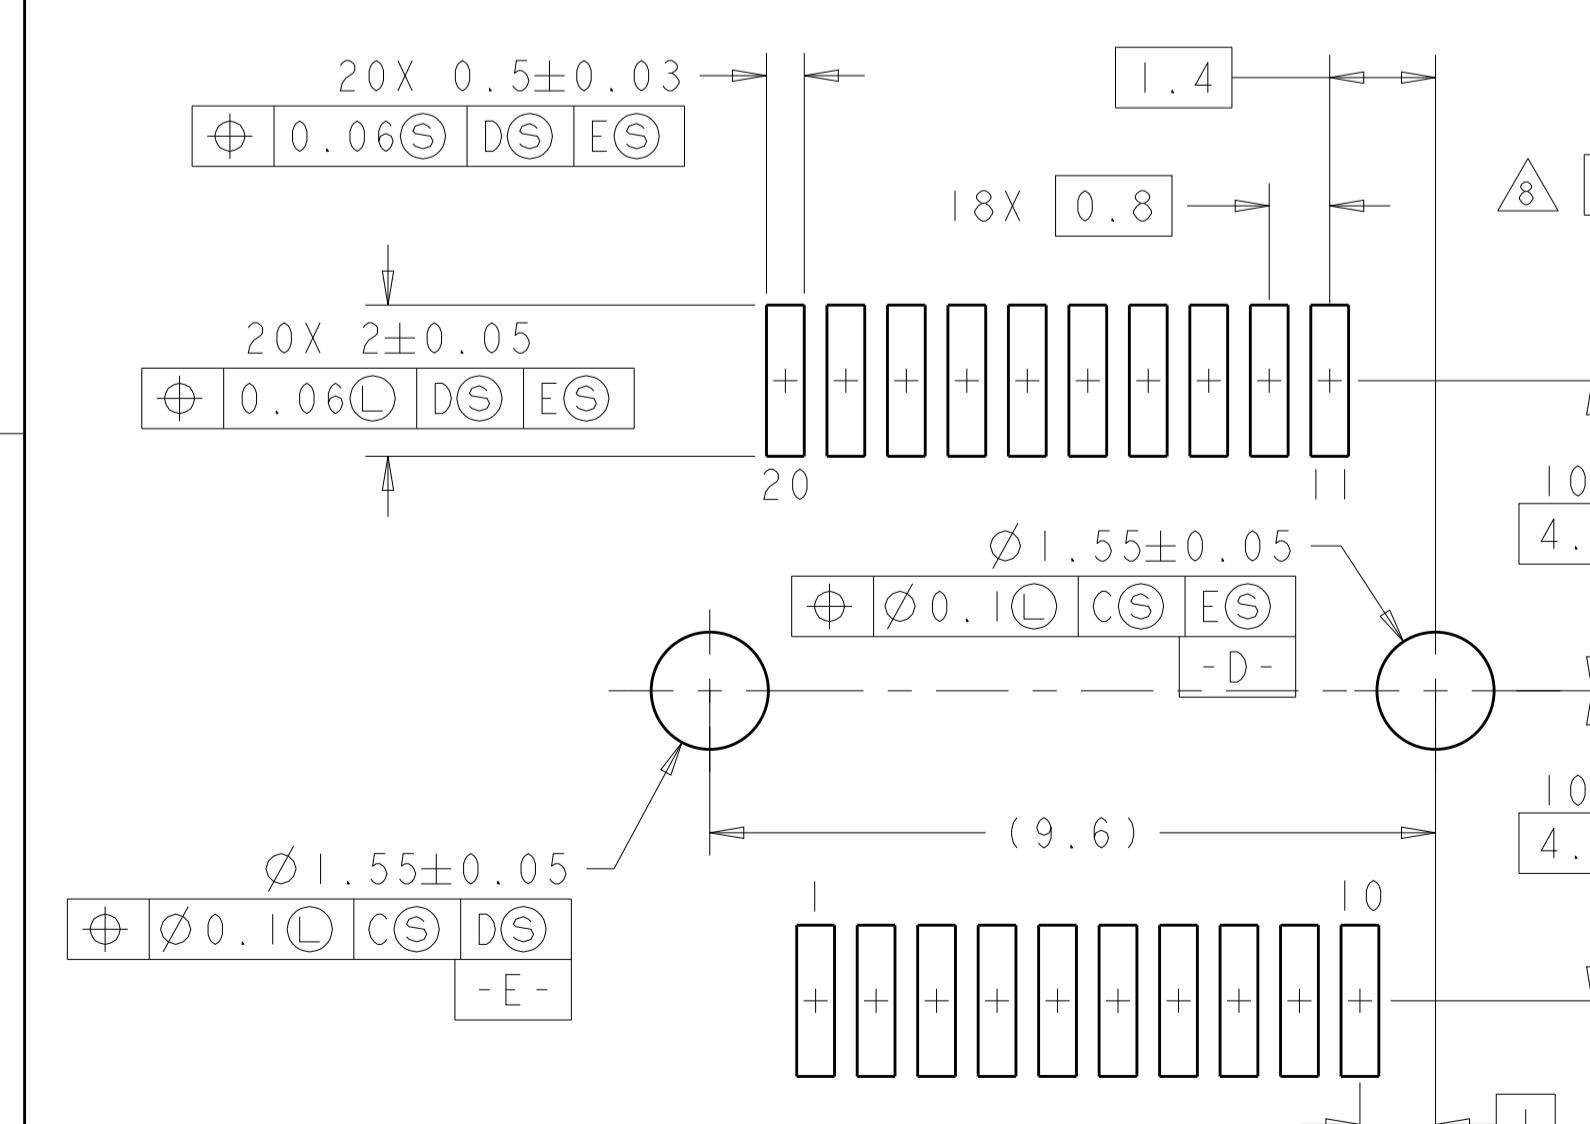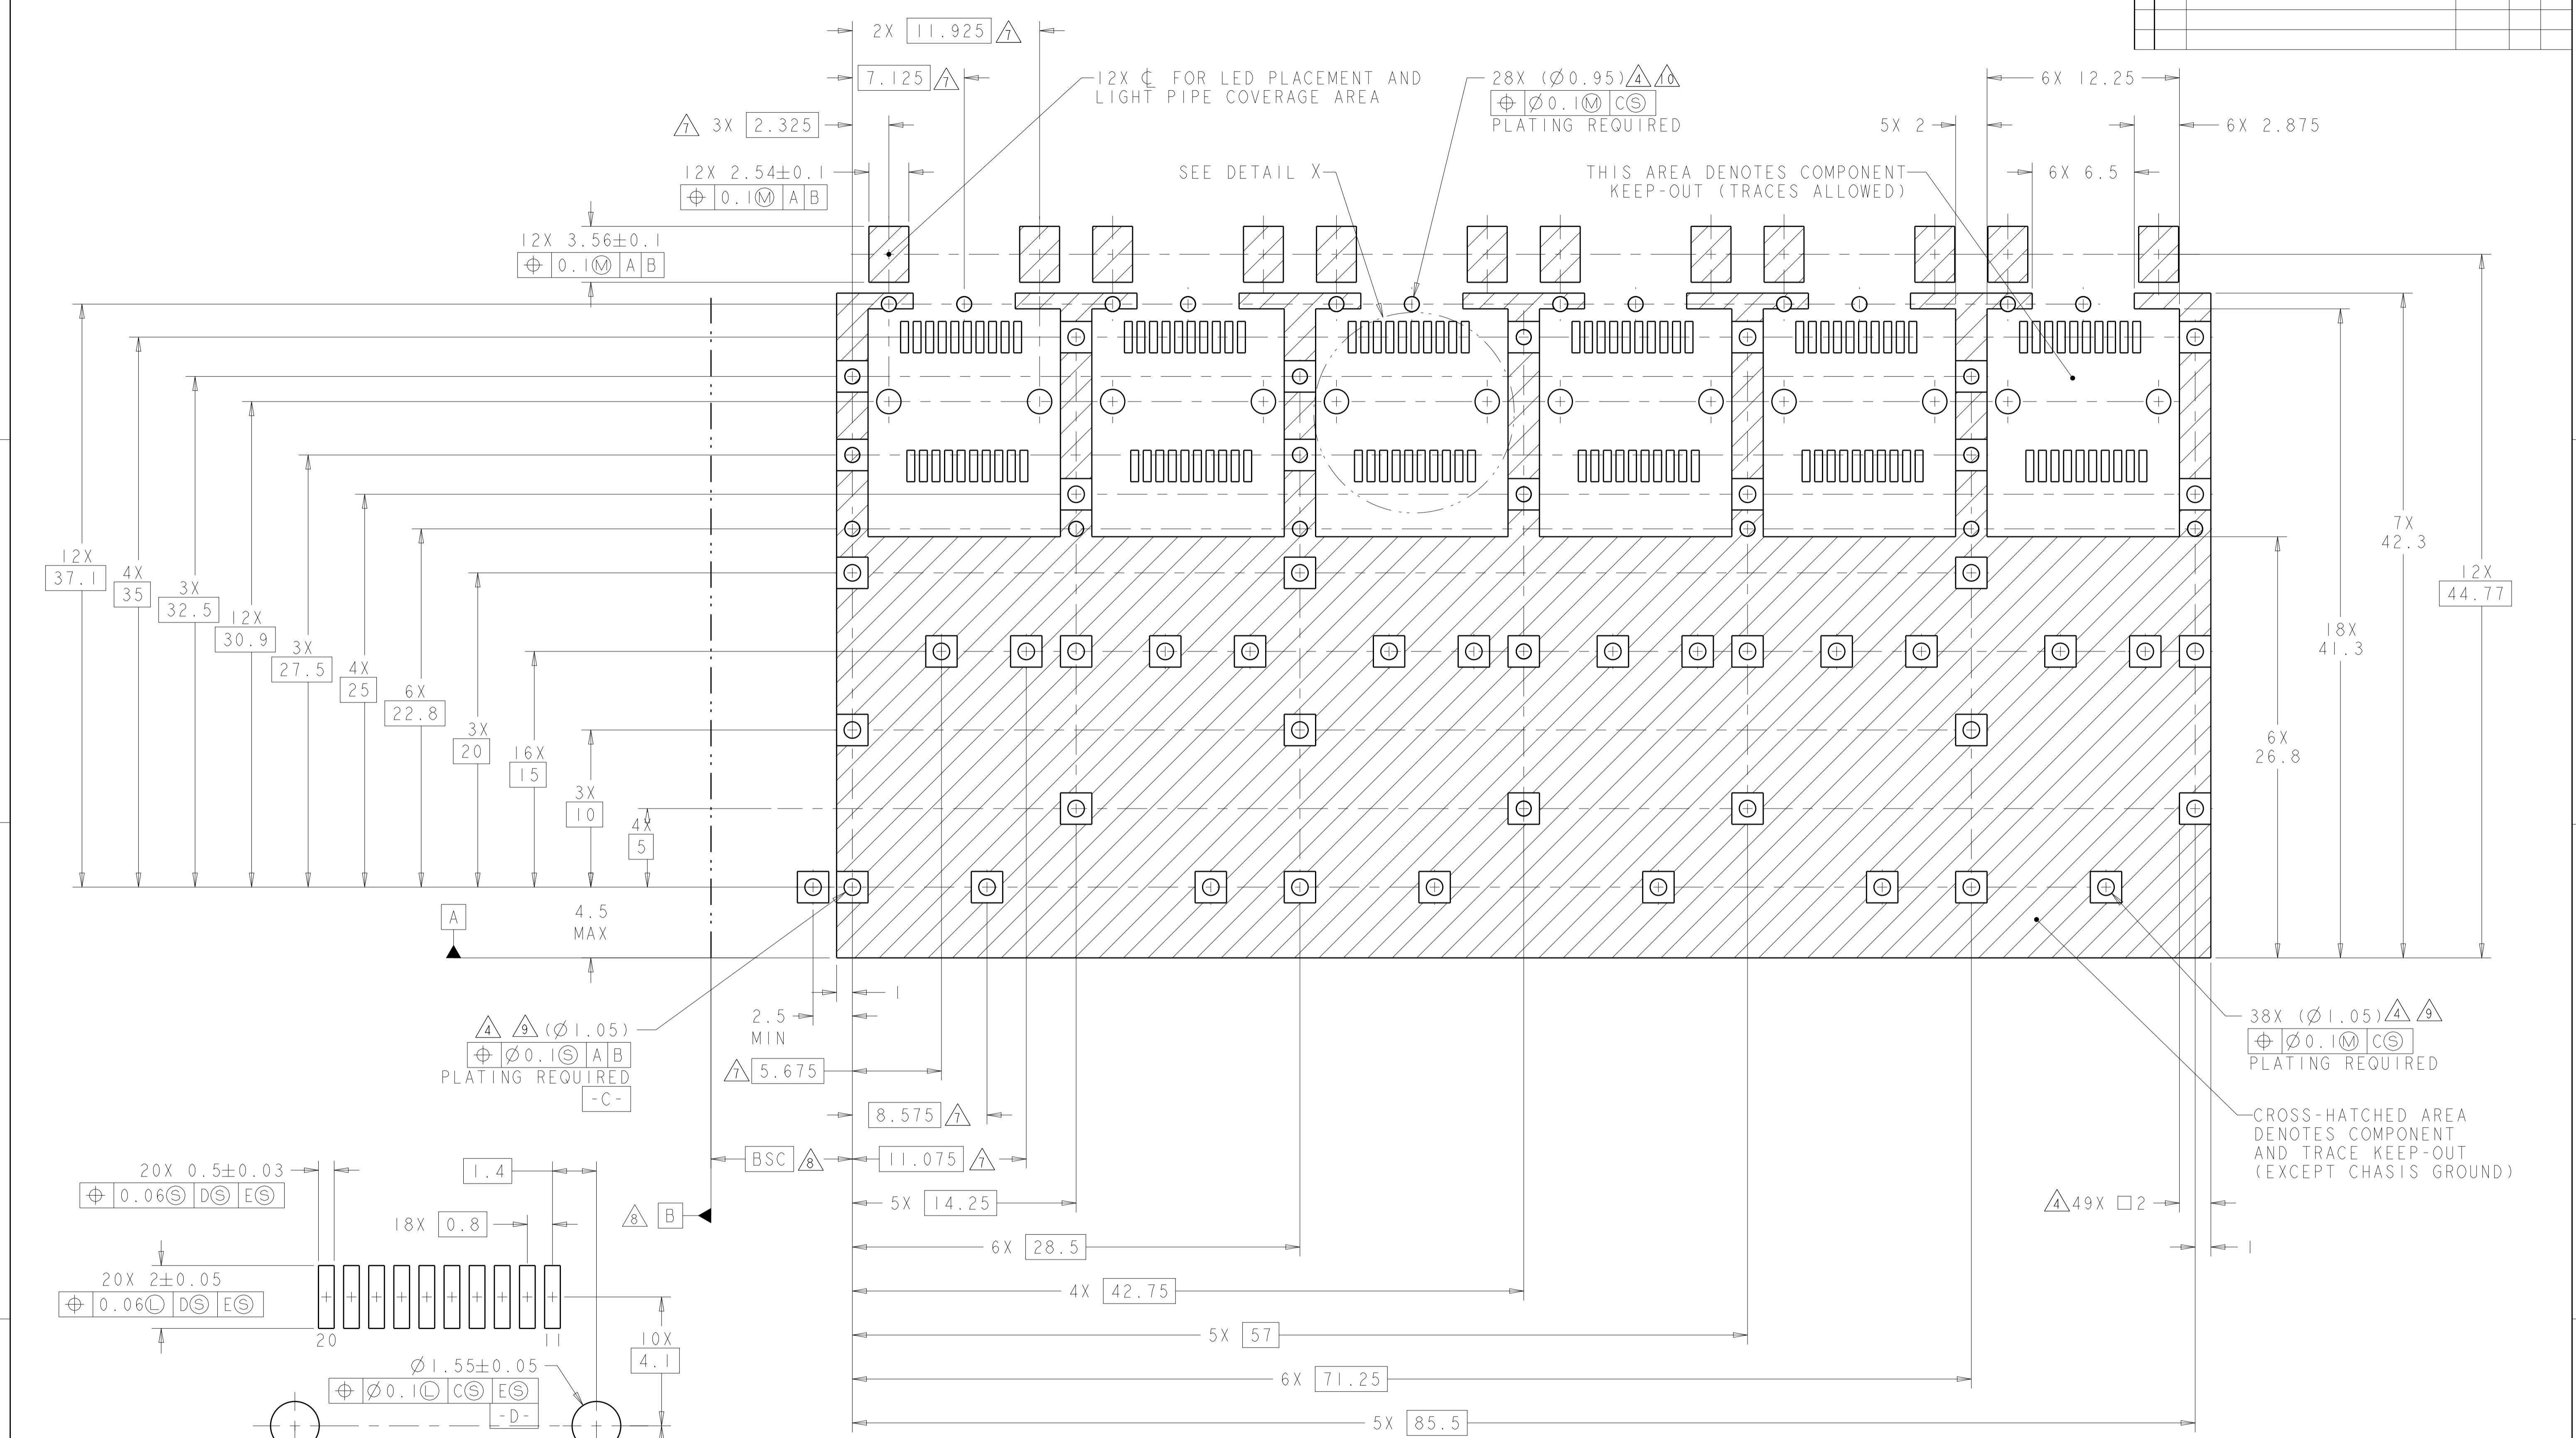

DETAIL X  
RECOMMENDED PT CONNECTOR LAYOUT  
6X INDIVIDUALLY  
SCALE 10:1

RECOMMENDED PCB CONFIGURATION  
WITH KEEP-OUT AREAS  
SCALE 5:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: Z.M.BEAM 25OCT2007	<b>STE</b> TE Connectivity
DIMENSIONS: mm		CHK: M.B.SCHMITT 25OCT2007	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPD: R.H.WERTZ 25OCT2007	NAME: SFP+ 1X6 CAGE ASSEMBLY PRESS FIT, EMI GASKET, W/ REDUCED LENGTH SQUARE LIGHT PIPES
0 PLC ±0.1		PRODUCT SPEC: 108-2364	
1 PLC ±0.1		APPLICATION SPEC: 114-13120	
2 PLC ±0.1		WEIGHT: -	
3 PLC ±0.1		SIZE: 114-13120	SCALE: 4:1 SHEET 3 OF 3 REV D
4 PLC ±0.1		Customer Drawing	
ANGLES ±0.1		Customer Drawing	
FINISH: ±1°			

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)