


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
H	-	B	ECR-15-010046	13JUL15	SW	RZ	

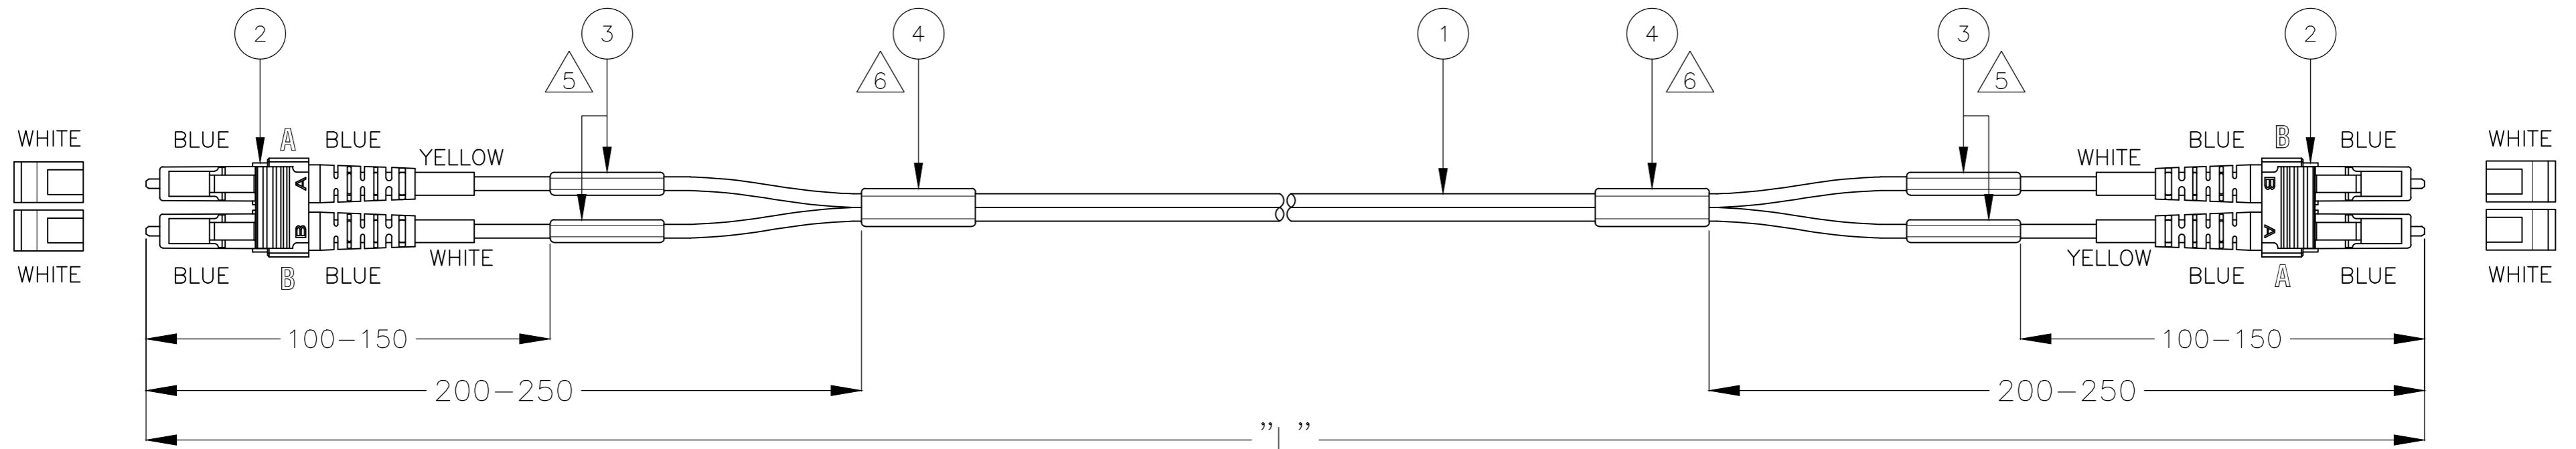


ASSEMBLY CONNECTIVITY	
LC CONN.	LC CONN.
YELLOW (A)	WHITE (B)
WHITE (B)	YELLOW (A)

STANDARD LENGTHS ACCORDING TO CUSTOMER DRAWING 1206850	
PART NUMBER	"L" (meter)
X-2061530-Y	XY.0

NOTES:

- 1 ATTENUATION  $\leq 0.3$  dB, MEASURED AT 1310 nm ACCORDING TO I.E.C. 61300-3-4 INSERTION METHOD B
- 2 RETURN LOSS  $\geq 45$  dB, IN MATED CONDITION AGAINST REFERENCE CONNECTOR AT 1310 nm
- 3 TUNED CONNECTORS
- 4 CABLE INFORMATION:
  - CORE DIAMETER: 9/125  $\mu$ m (2x)
  - OUTER JACKET DIAMETER: 1.8 x 3.6 mm
  - OUTER JACKET COLOUR: YELLOW
  - OUTER JACKET MATERIAL: LSZH
- △5 INFORMATION ON LABEL, SEE DETAIL FOR EXAMPLE
  - BARCODE
  - UNIQUE SERIAL NUMBER
  - ASSEMBLY LENGTH
  - TE CONNECTIVITY PART NUMBER & ORDER NUMBER
  - ATTENUATION AND RETURN LOSS AT 1310 nm
- △6 BLANK LABEL
  - \* ONLY ONE LABEL IN THE MIDDLE OF THE CABLE IS USED FOR LENGTHS < 0.6 METER

EXAMPLE LABEL DETAIL:

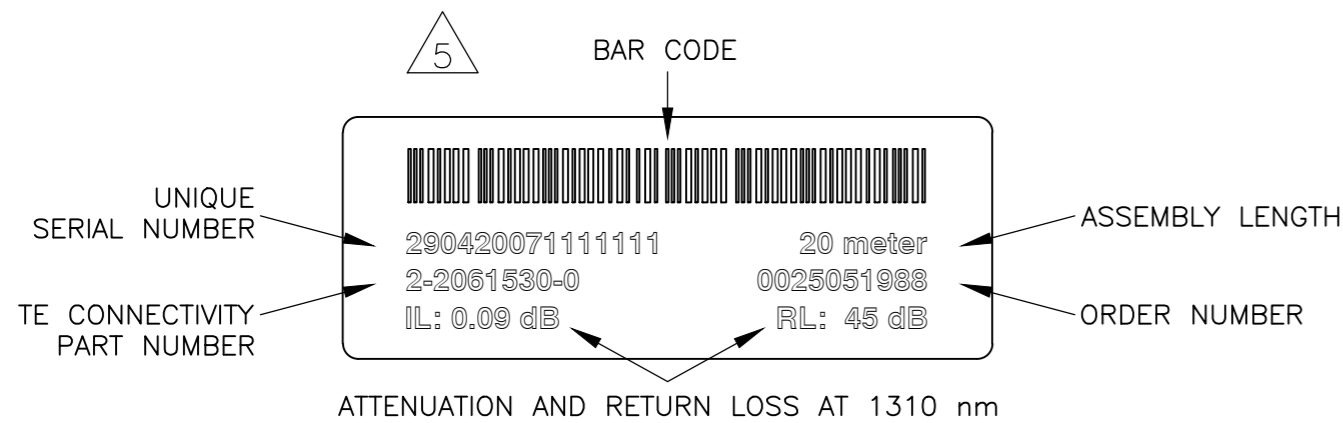

2	BLANK LABEL	4
4	INFORMATION LABEL	3
2	LC DUPLEX CONNECTOR, ULTRA SHORT, SINGLE MODE, BLUE	2
L	FOCAB 1.8MZ 9/125 G652D, YELLOW, LSZH	1
Qty	Description	Item
THIS DRAWING IS A CONTROLLED DOCUMENT.		
DIMENSIONS: mm TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC $\pm 1.0$ 1 PLC $\pm 0.5$ 2 PLC $\pm -$ 3 PLC $\pm -$ 4 PLC $\pm -$ ANGLES $\pm -$		DWN R. COOLEN 13APR2011 CHK R. GROENEVELD 01JUN2011 APVD A. HENGELMOLEN 01JUN2011 PRODUCT SPEC APPLICATION SPEC MATERIAL FINISH WEIGHT CUSTOMER DRAWING
NAME: R. GROENEVELD NAME: A. HENGELMOLEN FIBER OPTIC LEAD 1.8MZ LC/DPX - LC/DPX ULTRA SHORT SINGLE MODE 9/125 G652D		TE Connectivity SIZE: A2 CAGE CODE: 00779 DRAWING NO: C-2061530 RESTRICTED TO: -
SCALE: NTS		SHEET: 1 of 1
REV: B		

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)