
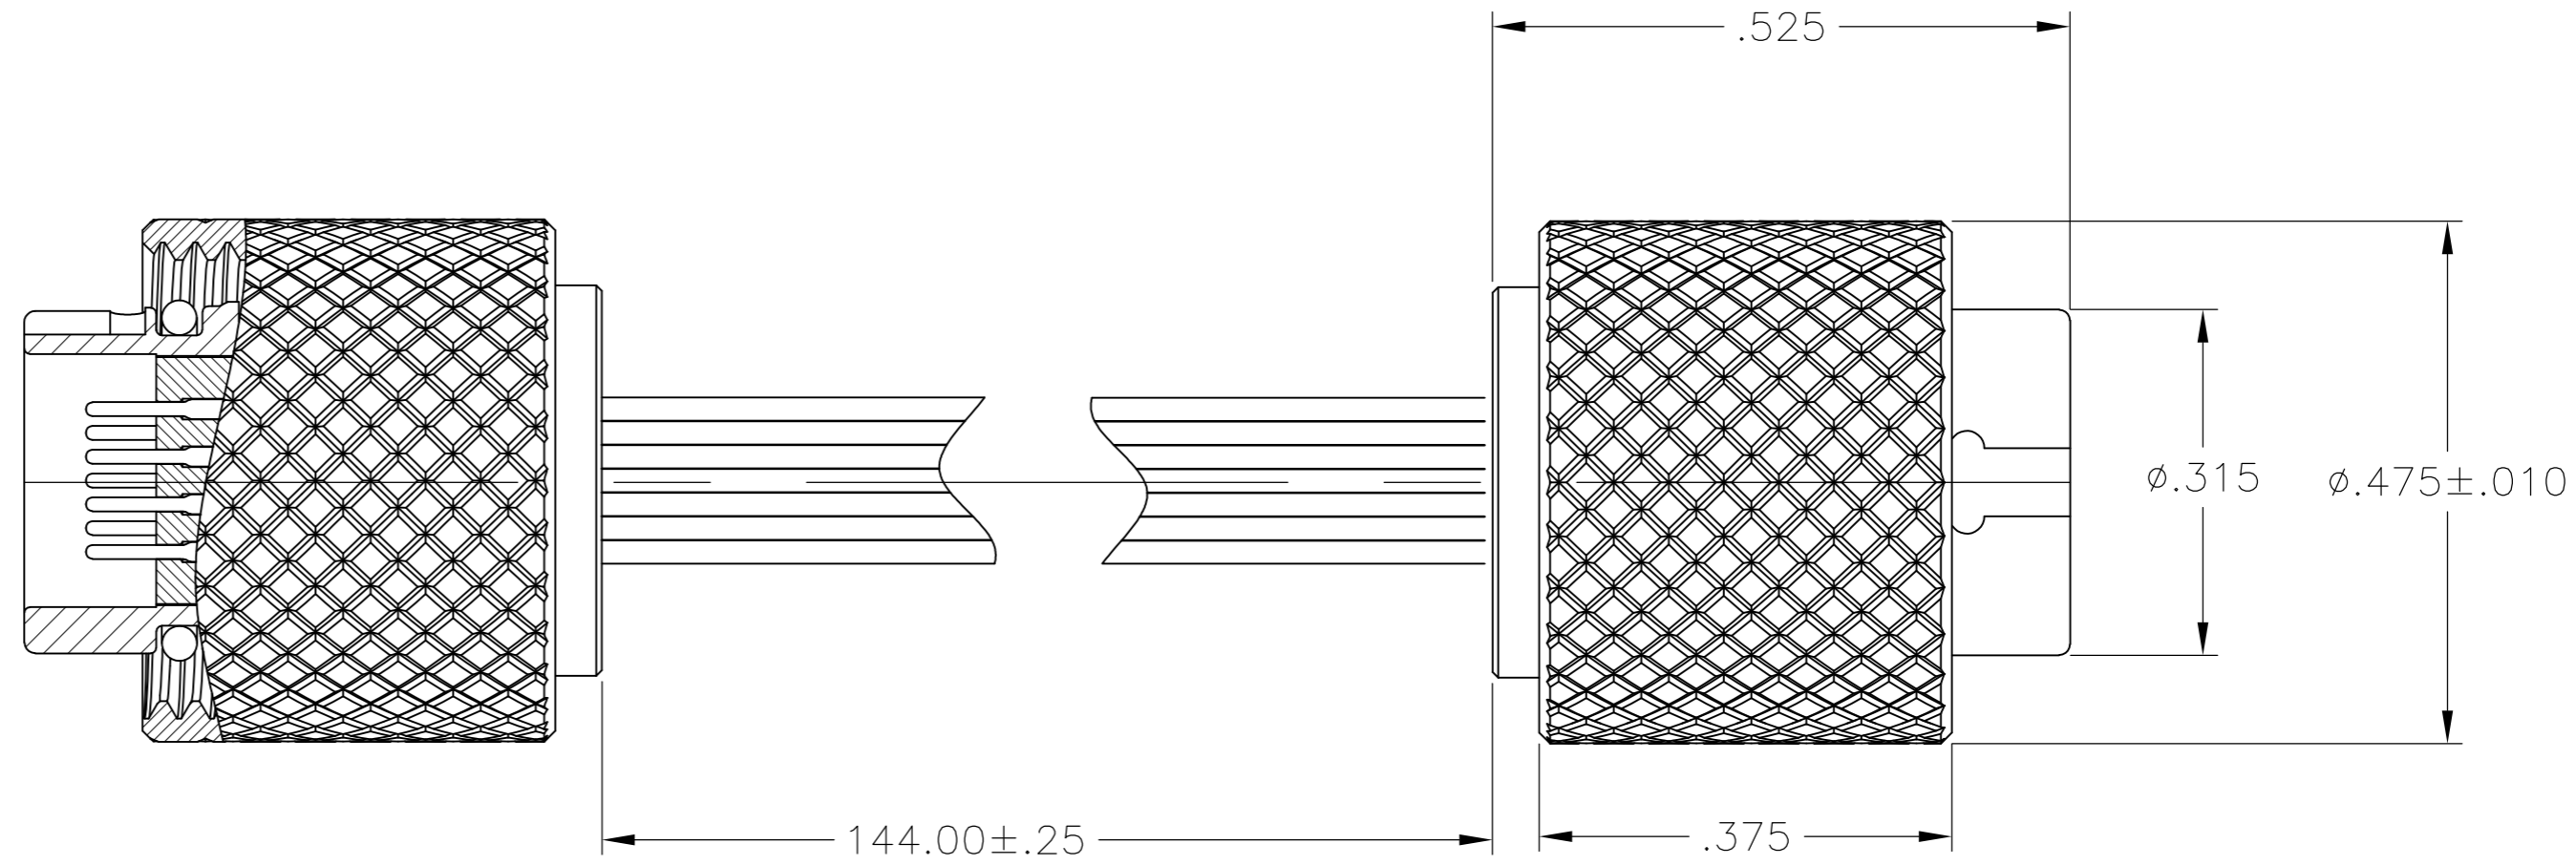


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
	A	RELEASED PER ECO 13-018496	11-22-13	CT	RL		

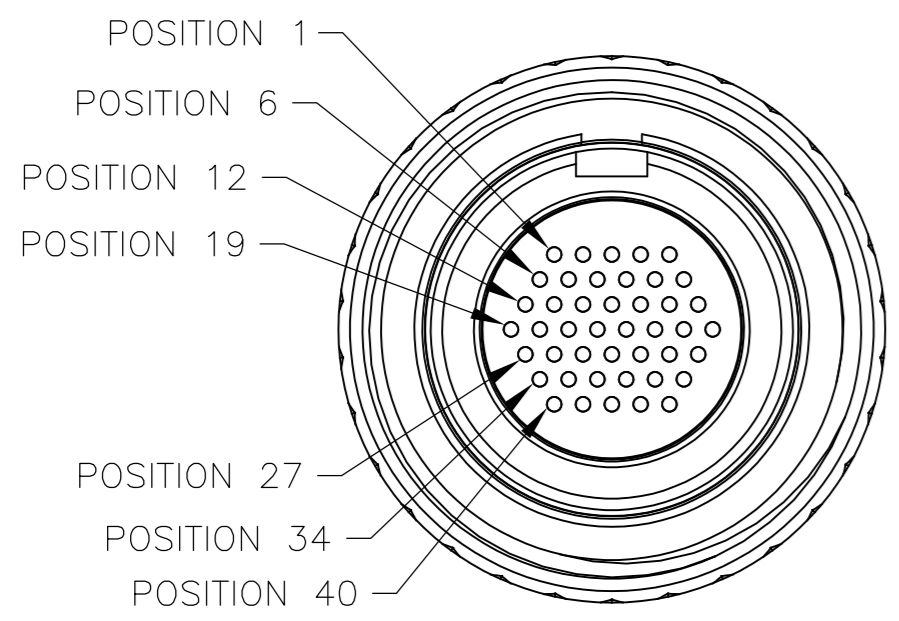

- CONNECTOR BODY AND COUPLING NUT MATERIAL: 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
 LOCKING RING MATERIAL: BERYLLIUM COPPER, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
 INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138 OR POLYPHENYLENE SULFIDE (PPS) PER ASTM D4067
 O-RING MATERIAL: FLUOROSILICONE
- WIRE TERMINATION: 34 AWG STRANDED WIRE
- LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION
- THE SAME CONNECTOR IS TERMINATED AT BOTH ENDS OF THIS JUMPER ASSEMBLY
- NANONICS PART NUMBER: JCM044PP4DX144TT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	C.C.THOMAS	8-29-13		TE Connectivity			
DIMENSIONS: INCHES		CHK	R.LEASE	8-29-13		NAME			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	R.LEASE	8-29-13		PLUG ASSEMBLY, CIRCULAR, THREADED COUPLING, METAL, 44 POSITION			
0 PLC ± - 1 PLC ± - 2 PLC ± .01 3 PLC ± .005 4 PLC ± - ANGLES ± 1°		PRODUCT SPEC				SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
MATERIAL SEE NOTE 1		FINISH	SEE NOTE 1		WEIGHT	A2 0PJN9		C=1-1925270-2	
		CUSTOMER DRAWING		SCALE	6:1	SHEET	1 of 1	REV	A

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)