



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19 .
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
AF	50				J	REDRAWN PER AF-6644	4/16/90	PF/JR

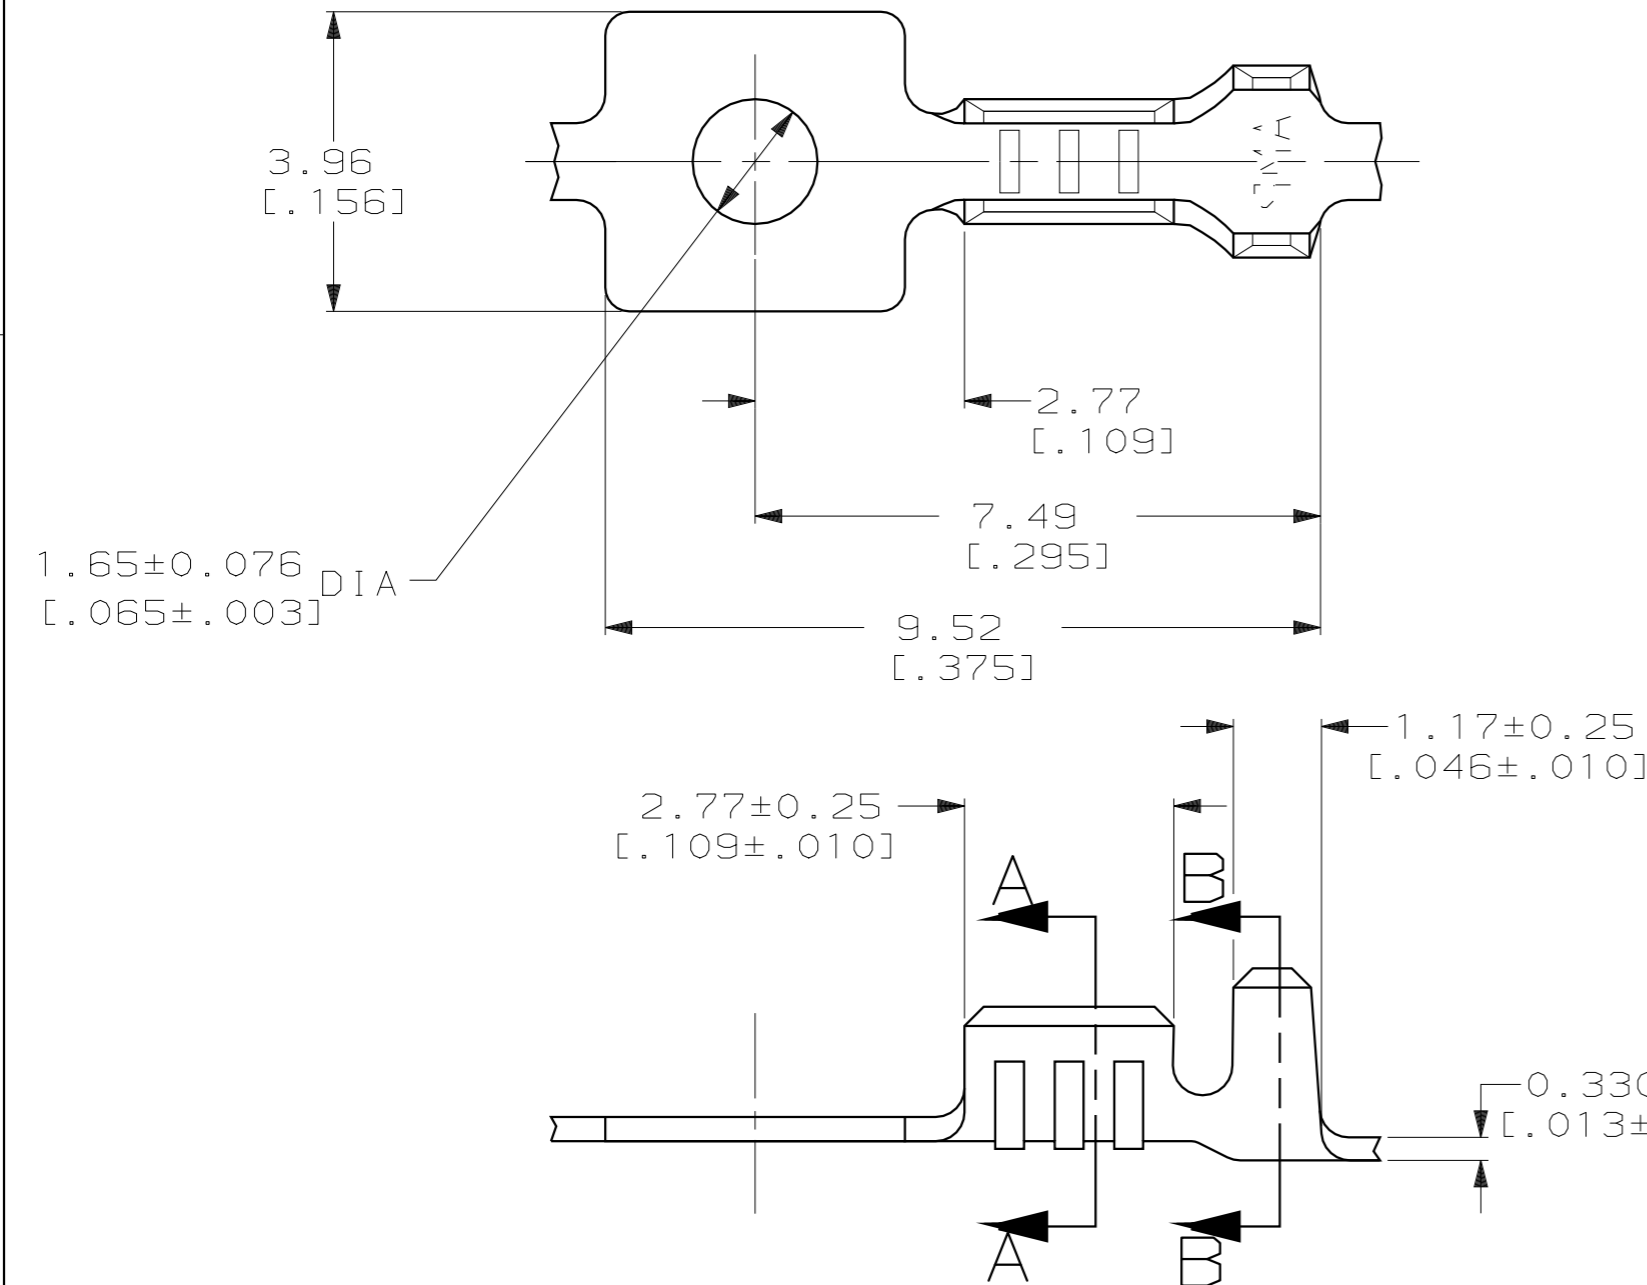

1 CONTINUOUS STRIP ON REELS

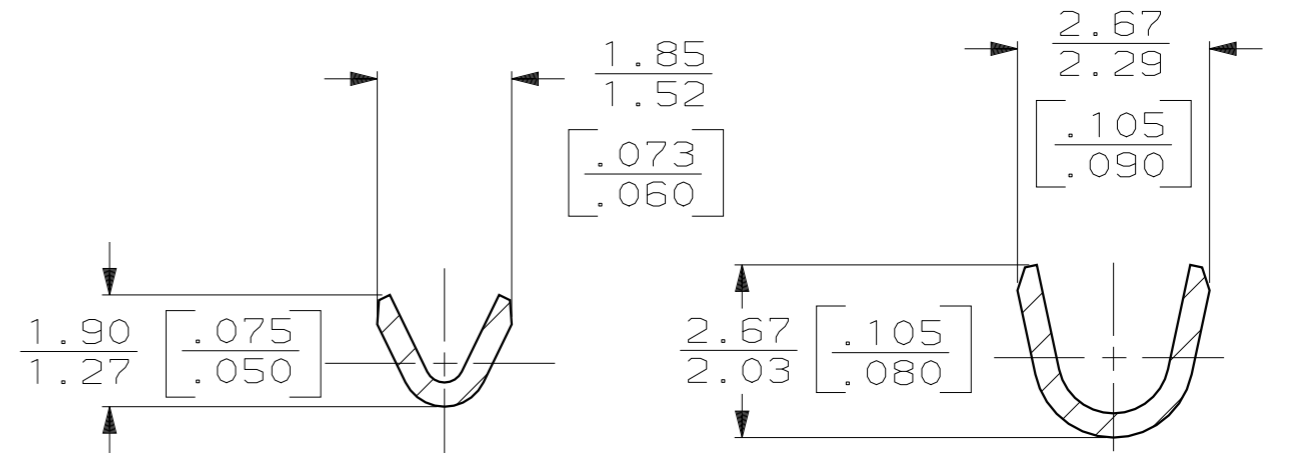

METRIC

0	2.29 [.090]	3.94 [.155]	F	1.40 [.055]	0.79 [.03] 0.76 [.030]	0.2mm ² [24] 0.14mm ² [26]
TYPE	WIDTH	STRIP LENGTH ±0.38 [±.015]	TYPE	WIDTH	HEIGHT ±0.051 [±.002]	WIRE
INSUL BARREL CRIMP			WIRE BARREL CRIMP			

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES]
 TOLERANCES ON:
 2 PLC DEC ± -
 3 PLC DEC ± 0.38 [.015]
 ANGLES ± -
 MATERIAL #2 HARD BRASS
 FINISH

0.89-1.65 [.035-.065]	0.14mm ² -0.2mm ² [26-24] AWG	61652-1
INSULATION RANGE	WIRE SIZE	PART NO
DR 4/16/90 P FORTNEY CHK 4/16/90 JR RUTH APPD 4/16/90 G YETTER APPD 4/16/90 R KUZO	AMP INCORPORATED Harrisburg, Pa. 17105	
PRODUCT SPEC -	NAME RING	
APPLICATION SPEC -	SIZE B	CAGE CODE 00779
WEIGHT -	SCALE 10:1	DRAWING NO 61652
		SHEET 1 OF 1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)