

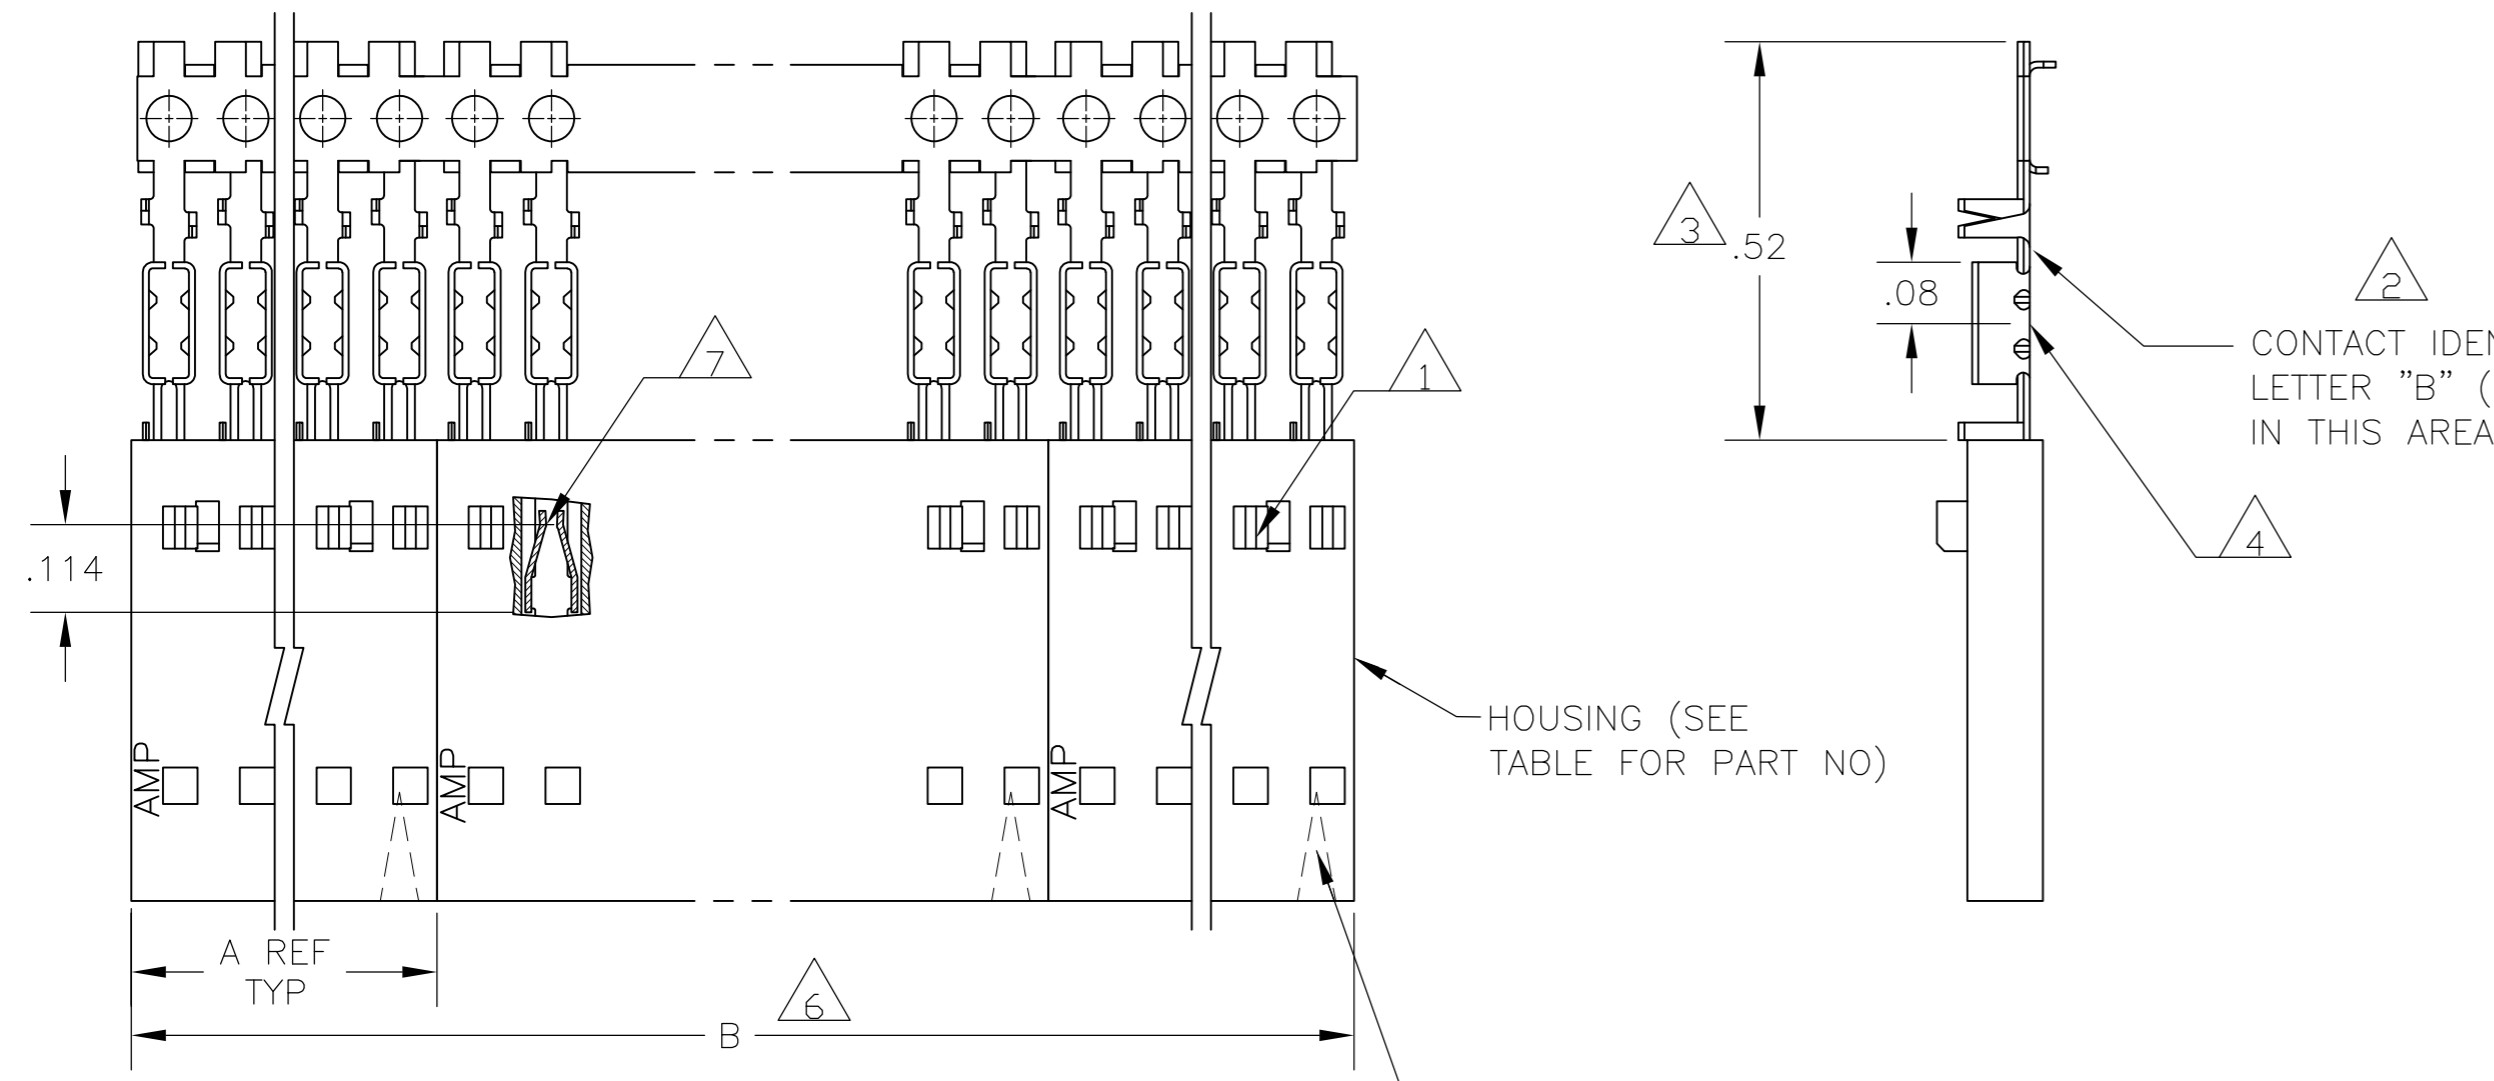


| LOC | DIST | REVISIONS                 |         |     |      |
|-----|------|---------------------------|---------|-----|------|
| P   | LTR  | DESCRIPTION               | DATE    | DWN | APVD |
|     | H    | EC 0G3C 0759 04           | 24JAN05 | BSV | JLG  |
|     | H1   | REVISED PER ECO-09-020689 | 02SEP09 | KK  | AEQ  |

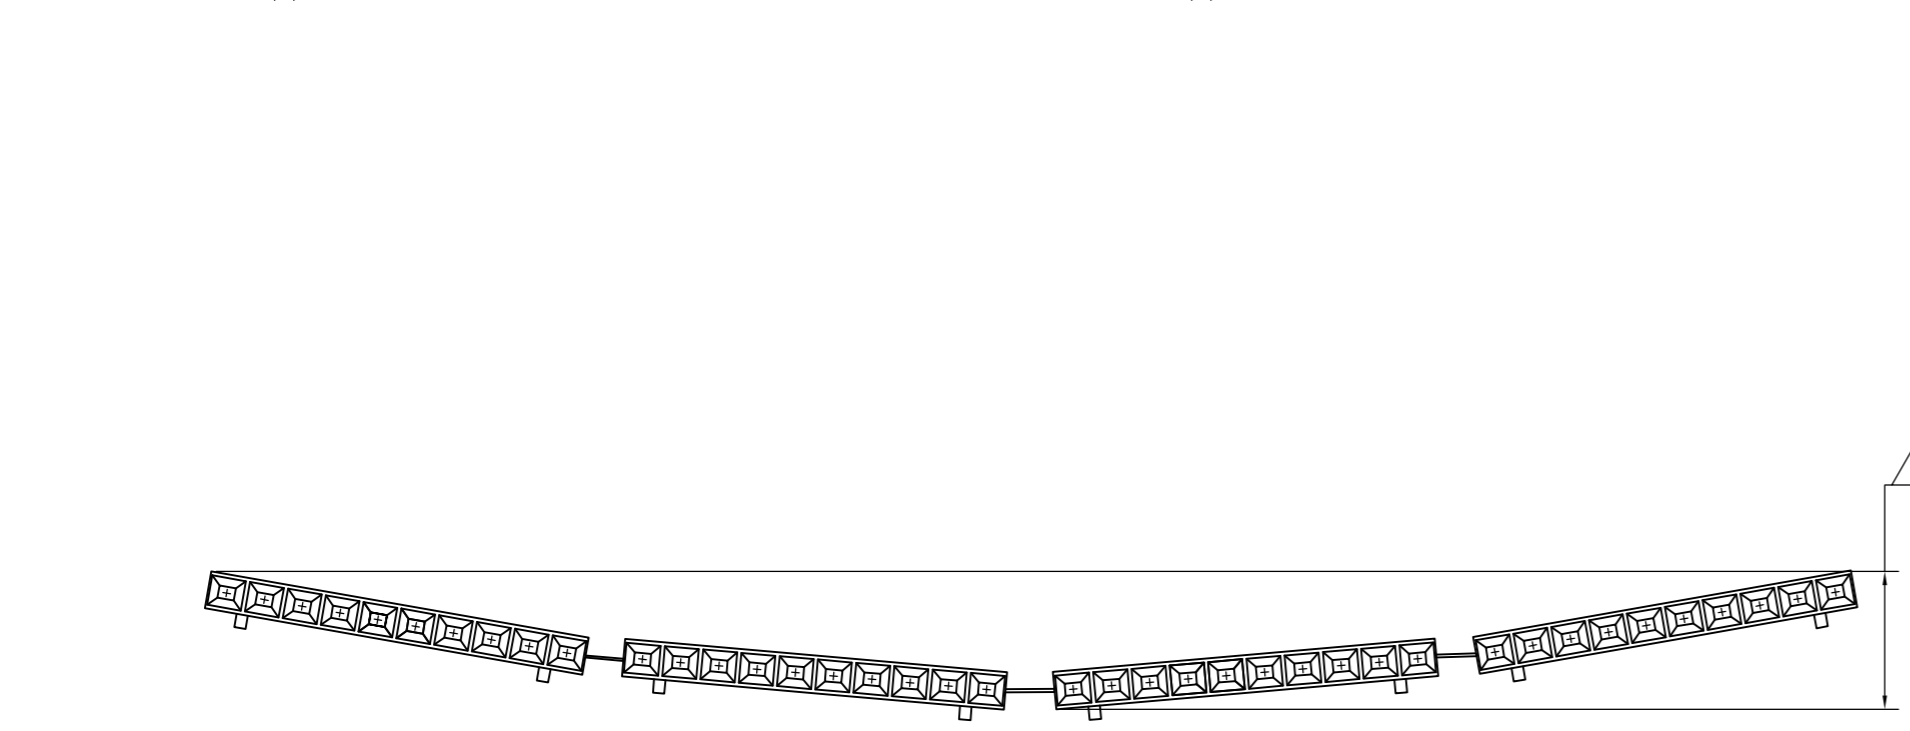

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103651
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 8 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- 9 .000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD IN THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 10 .000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN IN THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 11 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 12 HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC, COLOR BLACK.
- 13 .000015 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN IN THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 14 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

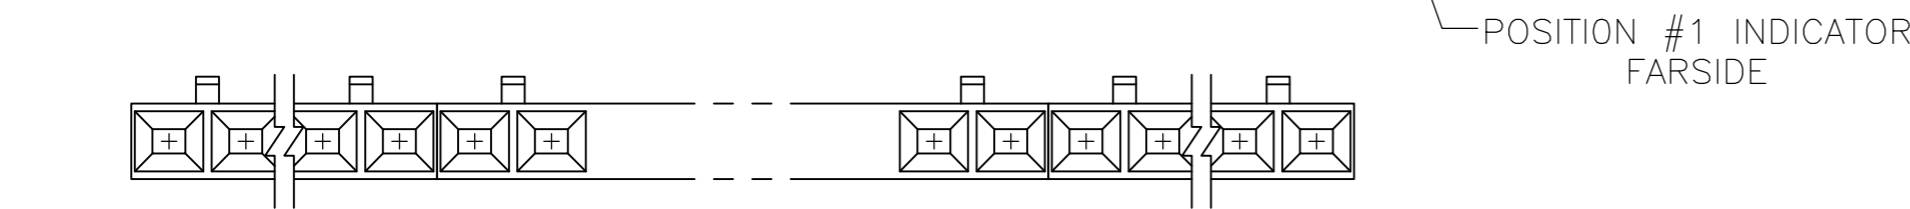

EXAMPLE: STRIP ASSEMBLY  
SCALE 2:1

|    |          |    |    |      |       |                     |            |                               |
|----|----------|----|----|------|-------|---------------------|------------|-------------------------------|
| 14 | OBSOLETE | 13 | 2  | 2.40 | 1.198 | 1-103648-1          | 12         | 6-103969-1                    |
| 14 | OBSOLETE | 13 | 2  | 2.20 | 1.098 | 1-103648-0          | 11         | 6-103969-0                    |
| 14 | OBSOLETE | 13 | 2  | 2.00 | .998  | 103648-9            | 10         | 5-103969-9                    |
| 14 | OBSOLETE | 13 | 2  | 1.80 | .898  | 103648-8            | 9          | 5-103969-8                    |
| 14 | OBSOLETE | 13 | 2  | 1.60 | .798  | 103648-7            | 8          | 5-103969-7                    |
| 14 | OBSOLETE | 13 | 2  | 1.40 | .698  | 103648-6            | 7          | 5-103969-6                    |
|    |          | 13 | 4  | 2.39 | .598  | 103648-5            | 6          | 5-103969-5                    |
|    |          | 13 | 4  | 1.99 | .498  | 103648-4            | 5          | 5-103969-4                    |
|    |          | 13 | 5  | 1.99 | .398  | 103648-3            | 4          | 5-103969-3                    |
|    |          | 13 | 8  | 2.40 | .298  | 103648-2            | 3          | 5-103969-2                    |
|    |          | 13 | 10 | 2.00 | .198  | 103648-1            | 2          | 5-103969-1                    |
|    |          | 11 | 2  | 2.00 | .998  | 103648-9            | 10         | 1-103969-2                    |
| 14 | OBSOLETE | 9  | 2  | 2.40 | 1.198 | 1-103648-1          | 12         | 1-103969-1                    |
| 14 | OBSOLETE | 9  | 2  | 2.20 | 1.098 | 1-103648-0          | 11         | 1-103969-0                    |
|    |          | 9  | 2  | 2.00 | .998  | 103648-9            | 10         | 103969-9                      |
| 14 | OBSOLETE | 9  | 2  | 1.80 | .898  | 103648-8            | 9          | 103969-8                      |
| 14 | OBSOLETE | 9  | 2  | 1.60 | .798  | 103648-7            | 8          | 103969-7                      |
| 14 | OBSOLETE | 9  | 2  | 1.40 | .698  | 103648-6            | 7          | 103969-6                      |
|    |          | 9  | 4  | 2.39 | .598  | 103648-5            | 6          | 103969-5                      |
|    |          | 9  | 4  | 1.99 | .498  | 103648-4            | 5          | 103969-4                      |
|    |          | 9  | 5  | 1.99 | .398  | 103648-3            | 4          | 103969-3                      |
|    |          | 9  | 8  | 2.40 | .298  | 103648-2            | 3          | 103969-2                      |
|    |          | 9  | 10 | 2.00 | .198  | 103648-1            | 2          | 103969-1                      |
|    |          | 6  |    |      |       | HOUSING PART NUMBER | NO OF POSN | ASSEMBLY PART NUMBER ON STRIP |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN L. MAYER 05 NOV 1986  
 CHK P.C.DEJONG 12-11-86  
 APVD J. SCHEIFFER 12-11-86

Tyco Electronics Corporation  
 Harrisburg, Pa 17105-3608

RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 C/L, WITH GUIDE RIBS, FOR #22-#26 AWG WIRE SIZE, STRIP FORM

108-25034  
 114-25026

SIZE A2 CAGE CODE 00779 DRAWING NO. 103969 RESTRICTED TO -

MATERIAL 12 FINISH SEE TABLE WEIGHT -

CUSTOMER DRAWING SCALE 1:1 SHEET 1 OF 1 REV H1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)