

# SPECIFICATION CONTROL DRAWING


**55PC1836**

**TITLE** THREE CONDUCTOR CABLE, SHIELDED, JACKETED, 600 VOLT

**Date** 6-28-95

**Revision**

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

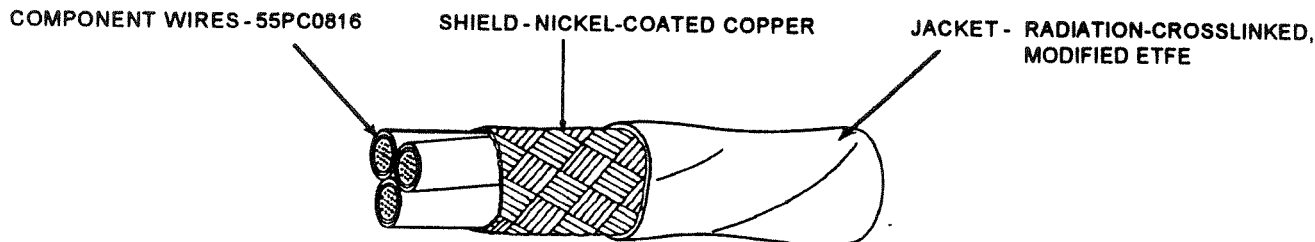

### CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		DIAMETER (in.)			WEIGHT (lbs/1000 ft.)	
			LOWER SPEC LIMIT	TARGET WALL	LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC1836-24-*	24	38	.0060	.0075	.122	.127	.131	13.58	14.15
55PC1836-22-*	22	38	.0060	.0075	.134	.139	.144	17.27	17.90
55PC1836-20-*	20	38	.0060	.0075	.153	.158	.162	23.07	23.76
55PC1836-18-*	18	38	.0060	.0080	.175	.180	.186	31.61	32.53
55PC1836-16-*	16	38	.0060	.0080	.192	.197	.203	38.39	39.43

### CABLE RATINGS AND ADDITIONAL REQUIREMENTS

**TEMPERATURE RATING: 200°C**  
 Maximum continuous conductor temperature  
**VOLTAGE RATING: 600 volts (rms)**  
**CROSSLINK VERIFICATION: 300 ± 3°C for 1 hour**  
**DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz**  
**JACKET COLOR: White preferred**  
**JACKET ELONGATION AND TENSILE STRENGTH:**  
 Elongation, 50% (minimum)  
 Tensile Strength, 5000 lbf/in<sup>2</sup> (minimum)  
**JACKET FLAWS:**  
 Spark Test, 1000 volts (rms), 60 Hz, 100% test  
 Impulse Dielectric Test, 6.0 kV (peak), 100 % test

**SHIELD COVERAGE: 85% (minimum)**  
**VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):**  
 1000 volts (rms), 60 Hz, 1 minute

**PART NUMBER:**  
 The "\*" in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.  
 Example: AWG 22, red, blue and green component wires; white jacket: 55PC1836-22-2/6/5-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HERIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

## Raychem

Raychem Corporation  
 300 Constitution Drive, Menlo Park, California 94025  
 1-800-2-Raychem Fax: 1-415-361-6290

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)