
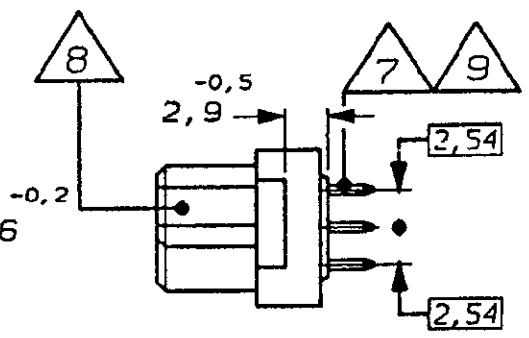


DO NOT SCALE

DIMENSIONS IN mm

METRIC

THIRD ANGLE PROJECTION

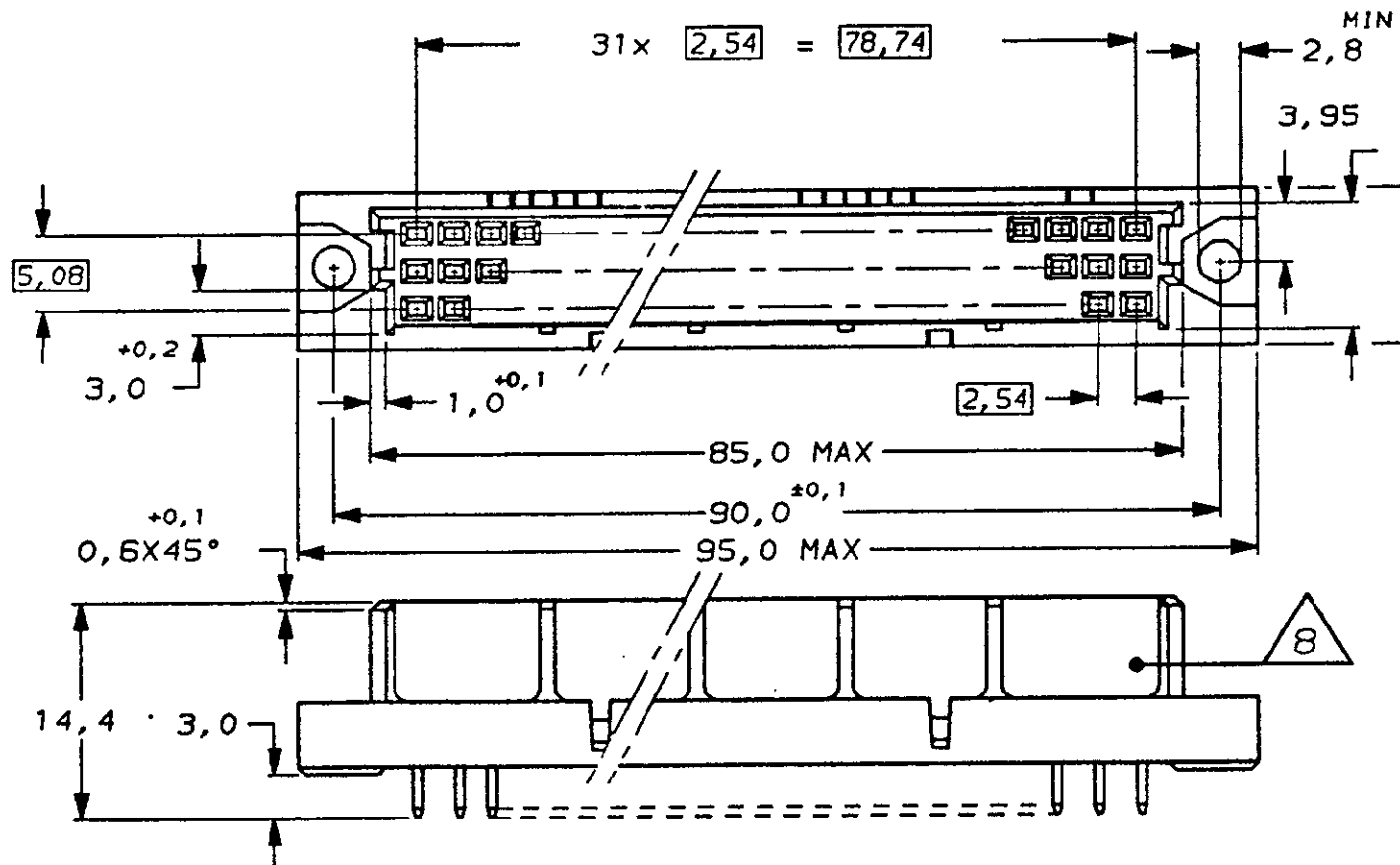

6

AT CONTACTAREA 0,4 UM GOLD OVER 1,25 UM NICKEL. REMAINDER 2,5 UM TIN-LEAD (93/7).

7

CONTACTS CAN BE REPLACED AFTER ASSEMBLING.

8

LAY-OUT OF CORING-OUTS OPTIONAL.

9

B.T.B. POST SUITABLE. FOR 1,0 ±0,1 MM. DIA HOLE P.C.B. THICKNESS 1,6 MM.

10

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

NOTES:

1 CONNECTOR MEETS THE REQUIREMENTS ACC. DIN 41612 AND IEC 603-2 SPECIFICATION.

2

MATERIAL CONTACT: PHOSPHORBRONZE. MATERIAL COVER: GLASSFILLED 30% THERM. POLYESTER. COLOR GREY ACC: RAL 7032.

3

AT CONTACTAREA 1,25 UM GOLD OVER 1,25 UM NICKEL. REMAINDER 2,5 UM TIN-LEAD (93/7).

4

AT CONTACTAREA 0,8 UM GOLD OVER 1,25 UM NICKEL. REMAINDER 2,5 UM TIN-LEAD (93/7).

5

AT CONTACTAREA 2,0 UM GOLD OVER 1,25 UM NICKEL. REMAINDER 2,5 UM TIN-LEAD (93/7).

10	OBSOLETE	6				8
		5				-7
		4				-4
		3		2		166 584 -1
			FINISH	MATERIAL		PART NUMBER

CUSTOMER DWG for REFERENCE ONLY						THIS DRAWING IS UNCLASSIFIED AND RELEASED FOR PUBLICATION 19					
TOLERANCES UNLESS OTHERWISE STATED DEC. ± 0,3 ANGLES ± 1°						INS. DIA. RANGE		WIRE RANGE		SCALE	
DR. E.LOPES 13.DEC.94						AMP AMP do BRASIL LTDA. São Paulo, Brasil					
CHK. M.RUSSO 14.DEC.94						DESCRIPTION 96 POS FEMALE CONN. ASS'Y WITH B.T.B. CONTACTS.					
B2 REV PER ECO-10-000444			KIS/REG 08JAN10 DE		DR. E.LOPES 13.DEC.94		APP. M.E.DINIZ 14/DEC/94		DWS NO A3 C-166 584		SHEET 1 of 1
B1 REDRAWN BY EC:LB-			0681/94 E.LOPES		13.DEC.94						
ISS REVISION RECORD			ECN		DR. E.LOPES						

8 7 6 5 4 3 2 1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)