


Thermofit Molded Parts
 Specification Control Drawing
 Limited Distribution

Part Number : 214A052-25/225
 Description : Boot, Rectangular,
 Subminiature, Straight

NOTES

- All dimensions are in $\frac{\text{inches}}{\text{[millimeters]}}$
- Dimensions appearing in table are as follows:
 a - As Supplied
 b - After Unrestricted Recovery
- Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by .06 max.

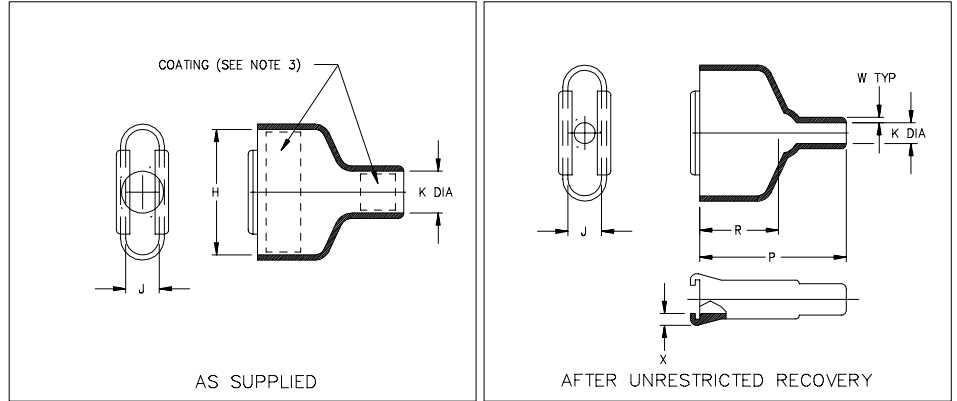

PART NUMBER	H		J		K		P	R	W	X
	±5%	±5%	±5%	±5%	Min	Max				
	a	b	a	b	a	b				
214A052-25/225	2.28 [57,9]	2.28 [57,9]	.54 [13,7]	.54 [13,7]	.75 [19,1]	.42 [10,7]	2.40 [61,0]	1.25 [31,8]	.04 [1,0]	.12 [3,0]

If this document is printed it becomes uncontrolled.
 Check for the latest revision.

Raychem

RAYCHEM CORPORATION
 300 CONSTITUTION DRIVE
 MENLO PARK, CALIFORNIA 94025

Revision : B
 Date : 10/8/97


Part Number : 214A052-25/225
 Description : Boot, Rectangular,
 Subminiature, Straight

Thermofit Molded Parts
 Specification Control Drawing
 Limited Distribution

Part Number : 214A052-25/225
 Description : Boot, Rectangular,
 Subminiature, Straight

MATERIAL DASH NO.	MATERIAL DESCRIPTION	RT SPEC	COATING SLASH NO.	COATING S NO.	COATING DESCRIPTION
-25	Elastomer, Fluid Resistant	RT-1325	/225	S-1026	Adhesive

ORDERING INFORMATION

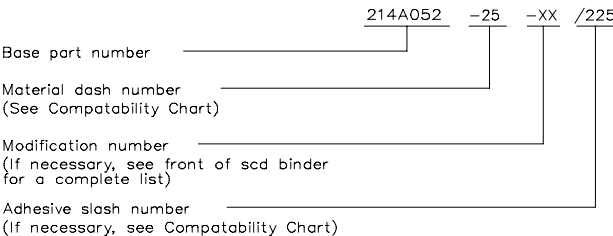

THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE; CONSULT YOUR
 NEAREST FIELD REPRESENTATIVE FOR CURRENT REVISION

Raychem

RAYCHEM CORPORATION
 300 CONSTITUTION DRIVE
 MENLO PARK, CALIFORNIA 94025

Revision : B
 Date : 10/8/97

Part Number : 214A052-25/225
 Description : Boot, Rectangular,
 Subminiature, Straight

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)