
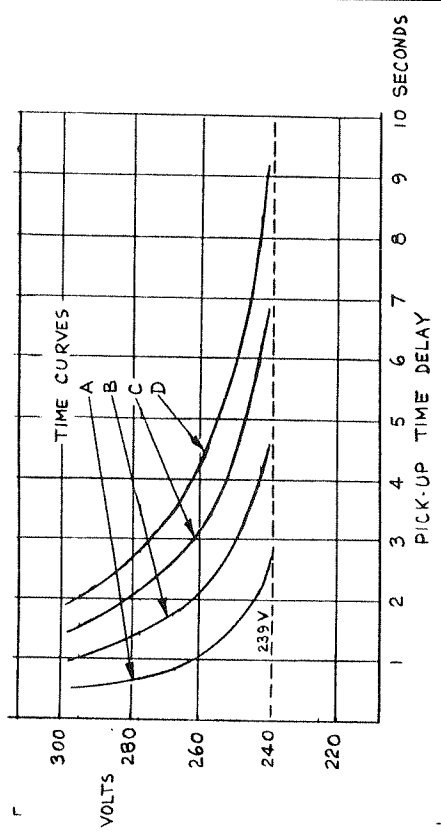
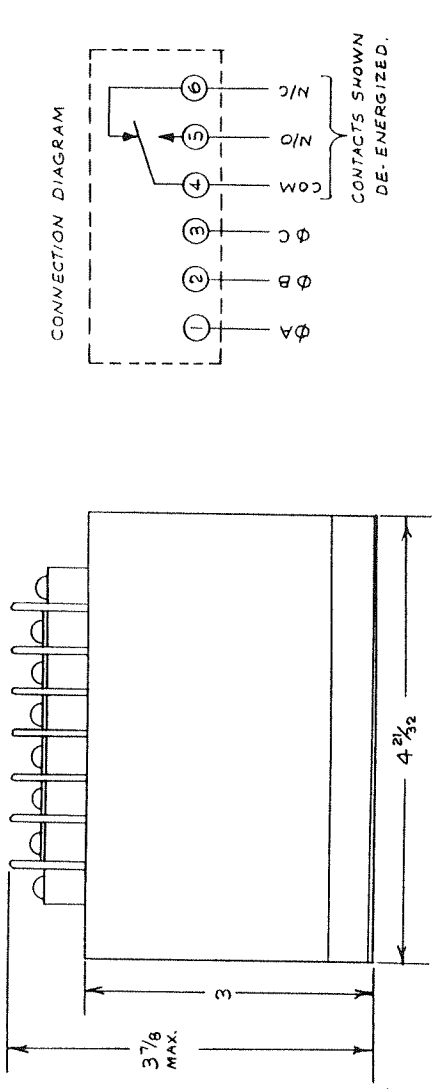


REVISIONS		DATE	APPROVED
ZONE	DESCRIPTION		
A	TIME CURVES ADDED	3/19/51	Ch
B	NOMINAL VOLTAGE WAS 120VAC	4/15/51	Ch

**SPECIFICATIONS**

NOMINAL VOLTAGE: 208VAC, 3Ø, 3 WIRE, 50/60 HZ.  
 TYPE SENSING: HIGHEST OF THE 3-PHASE INPUT.  
 T/D ADJUSTMENT RANGE: SEE FOUR TYPICAL CURVES BELOW AND NOTES 1 THRU 3.  
 O/V ADJUSTMENT RANGE: 208 - 260 VAC. FACTORY SETTING: 239 VAC.  
 TEMPERATURE RANGE: OPERATING: -25°F. TO +125°F. STORAGE: -65°F. TO +155°F.  
 CONTACT RATING: 5 AMP AT 120VAC OR 28VDC. (RESISTIVE)

NSN 5945-01-198-2045

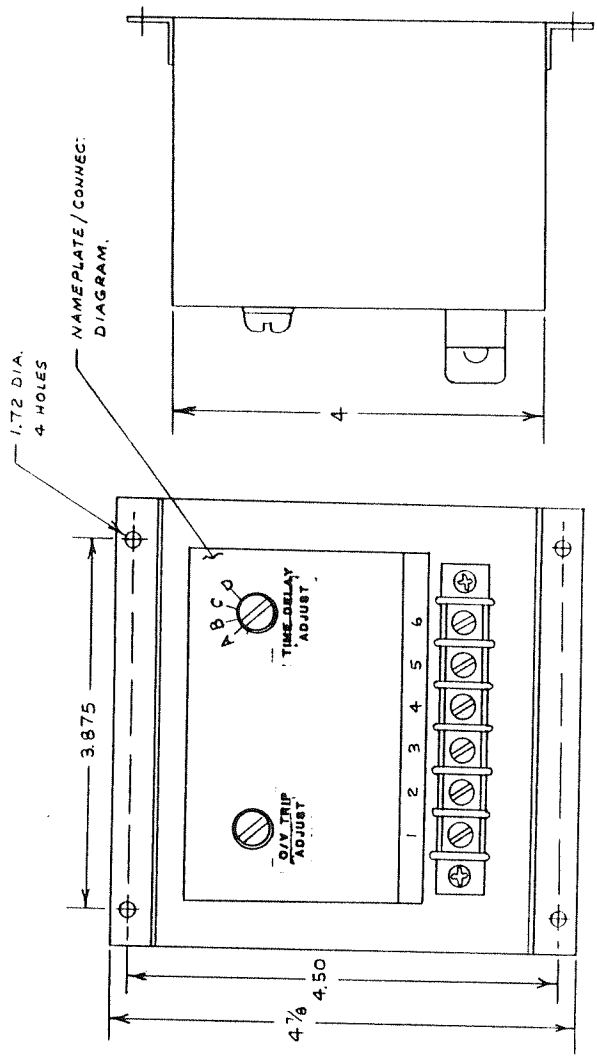

TYPICAL CURVES FOR 239VAC PICK-UP SETTING.

**NOTES:**

1. REMOVE SCREWS FOR ACCESS TO ADJUSTMENTS.
2. THE OVERVOLTAGE TRIP POINT IS SCREWDRIVER ADJUSTABLE. CLOCKWISE ROTATION OF THE ADJUSTMENT POTENTIOMETER WILL RAISE THE TRIP POINT.
3. A FOUR STEP SCREWDRIVER ADJUSTABLE SWITCH, PROVIDES THE SELECTION OF THE DESIRED TIME CURVE A, B, C OR D.

CITY, RECD.	SYM.	DESCRIPTION	CODE IDENT. NO.	PART NO.	SPEC.	MATERIAL OR NOTE	ITEM NO.
LIST OF MATERIAL							
CONTRACT NO.		DRAWN		CHECKED		DESIGN APPROVAL	
2-24-51		T.M.T.		P.H.		P.H.	
DIMENSIONS IN INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED		FRACTIONS DECIMALS ANGLES		MATERIAL	
1/16		.001		.001		WILMAR	
1/32		.002		.002		LUCILLE, IRE	
3/16		.005		.005		3330 ANGLE STREET	
1/2		.010		.010		TORRANCE, CALIFORNIA 90580	
1		.020		.020		TITLE	
2		.040		.040		OVERVOLTAGE RELAY	
3		.080		.080		MODEL 301-38X	
4		.160		.160		SIZE	
5		.3125		.3125		CODE IDENT. NO.	
6		.625		.625		C 25248	
7		1.25		1.25		DWG. NO.	
8		2.5		2.5		21-470	
9		5.0		5.0		SCALE	
10		10.0		10.0		WEIGHT	
11		20.0		20.0		SHEET	
12		40.0		40.0		P.E.V.	
13		80.0		80.0		B	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)