

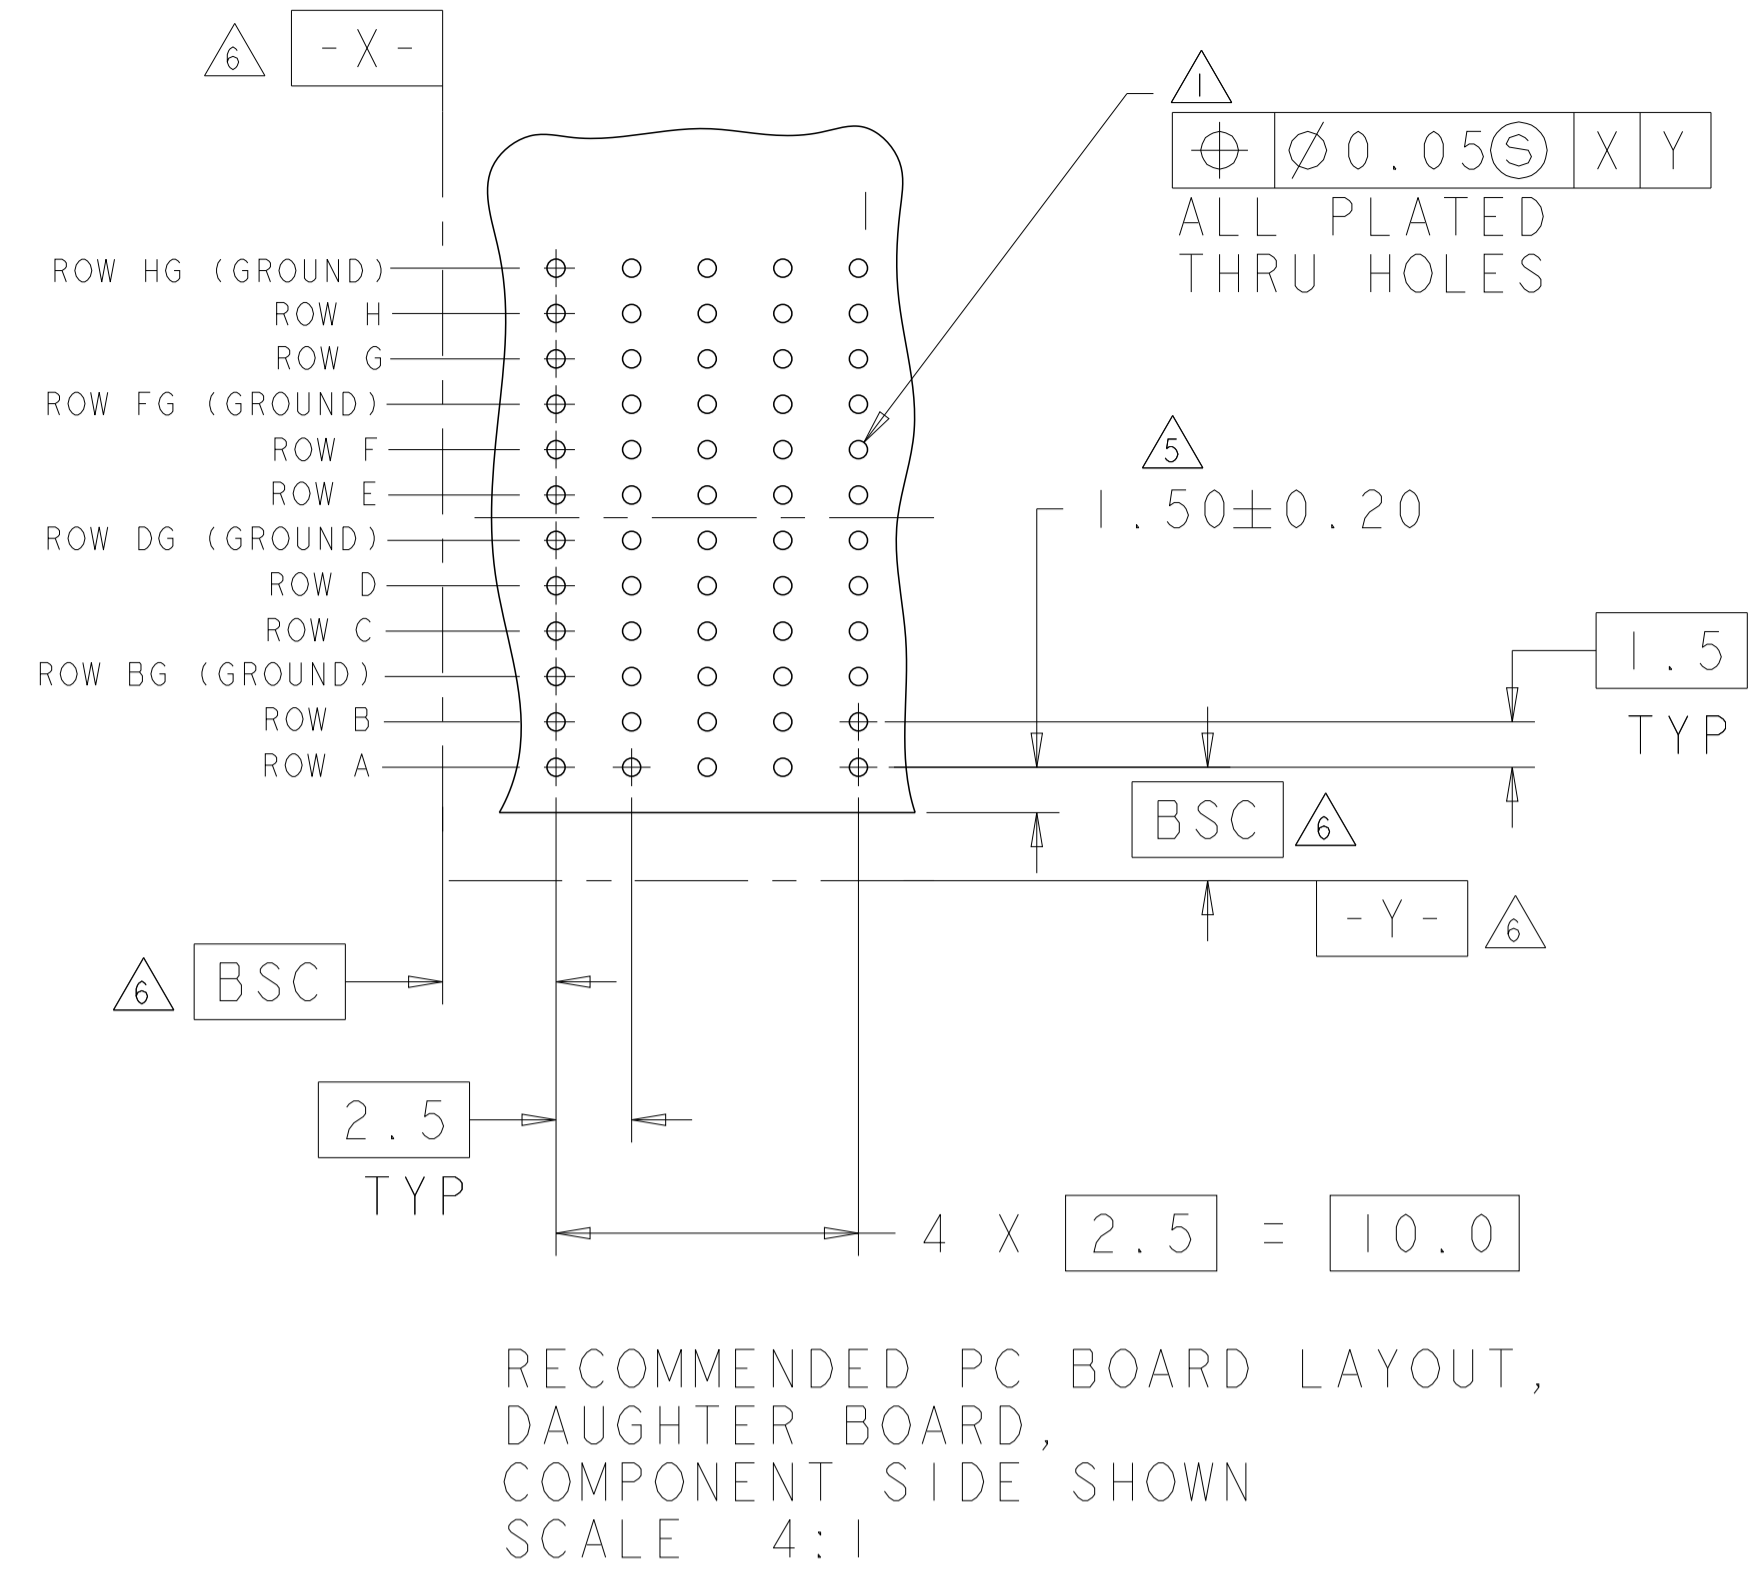
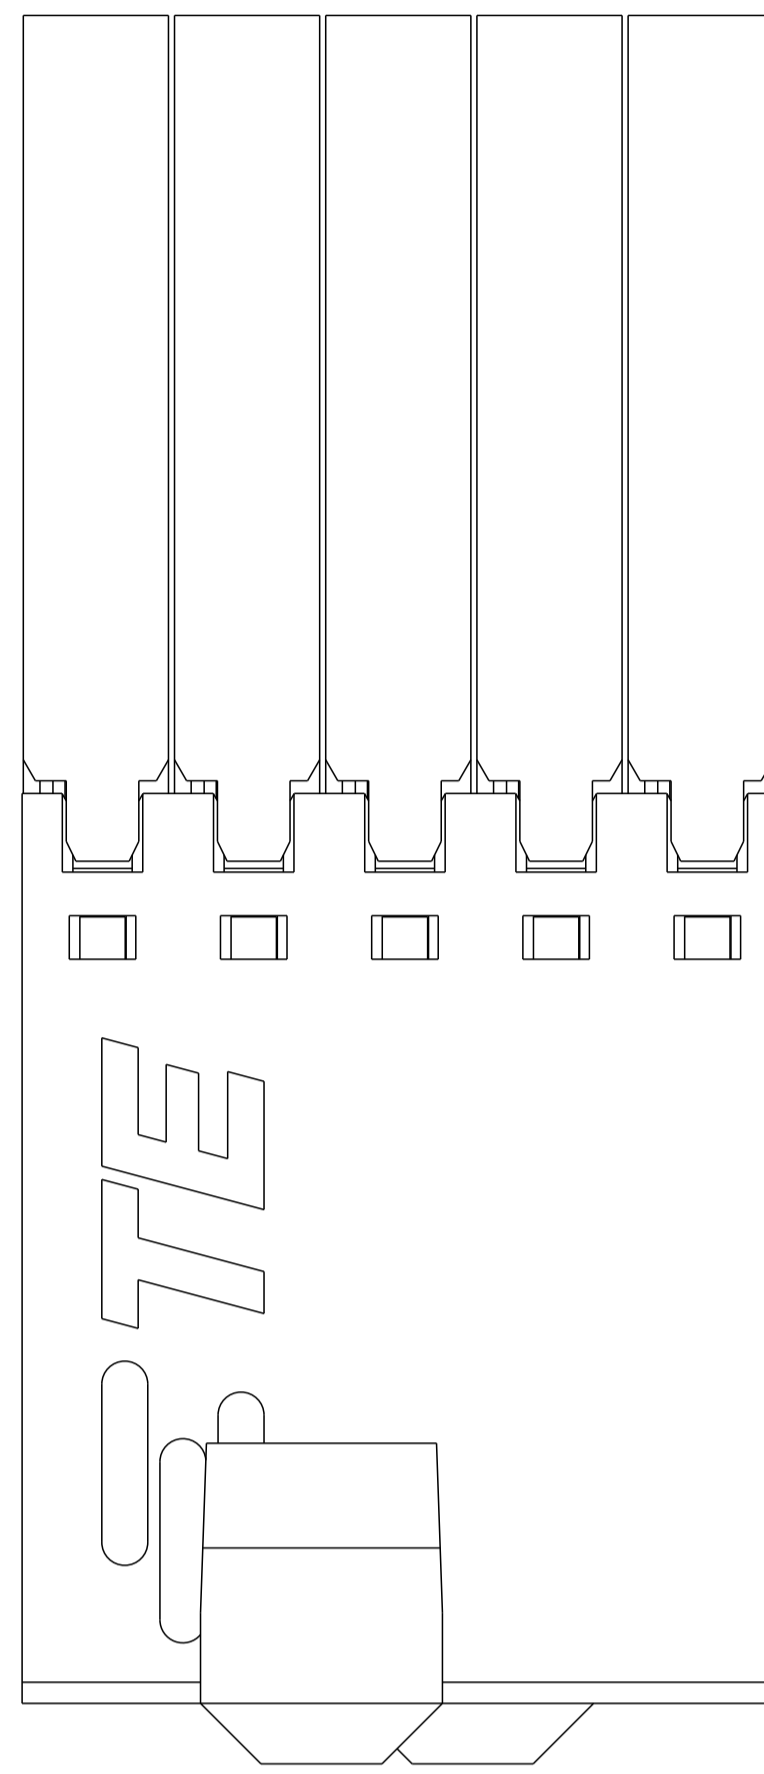
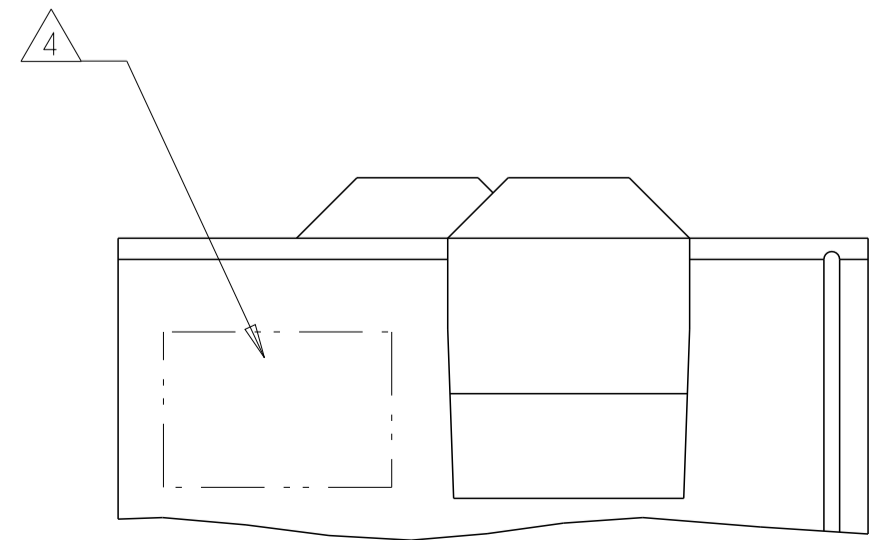


REVISIONS				
P	LTN	DESCRIPTION	DATE	APVD
C		REVISED PER ECO-14-005095	16APR2014	AP RP
D		REVISED PER ECO-16-008845	22SEP2016	AP RP
E		REVISED PER ECO-17-013036	13SEP2017	AP RP

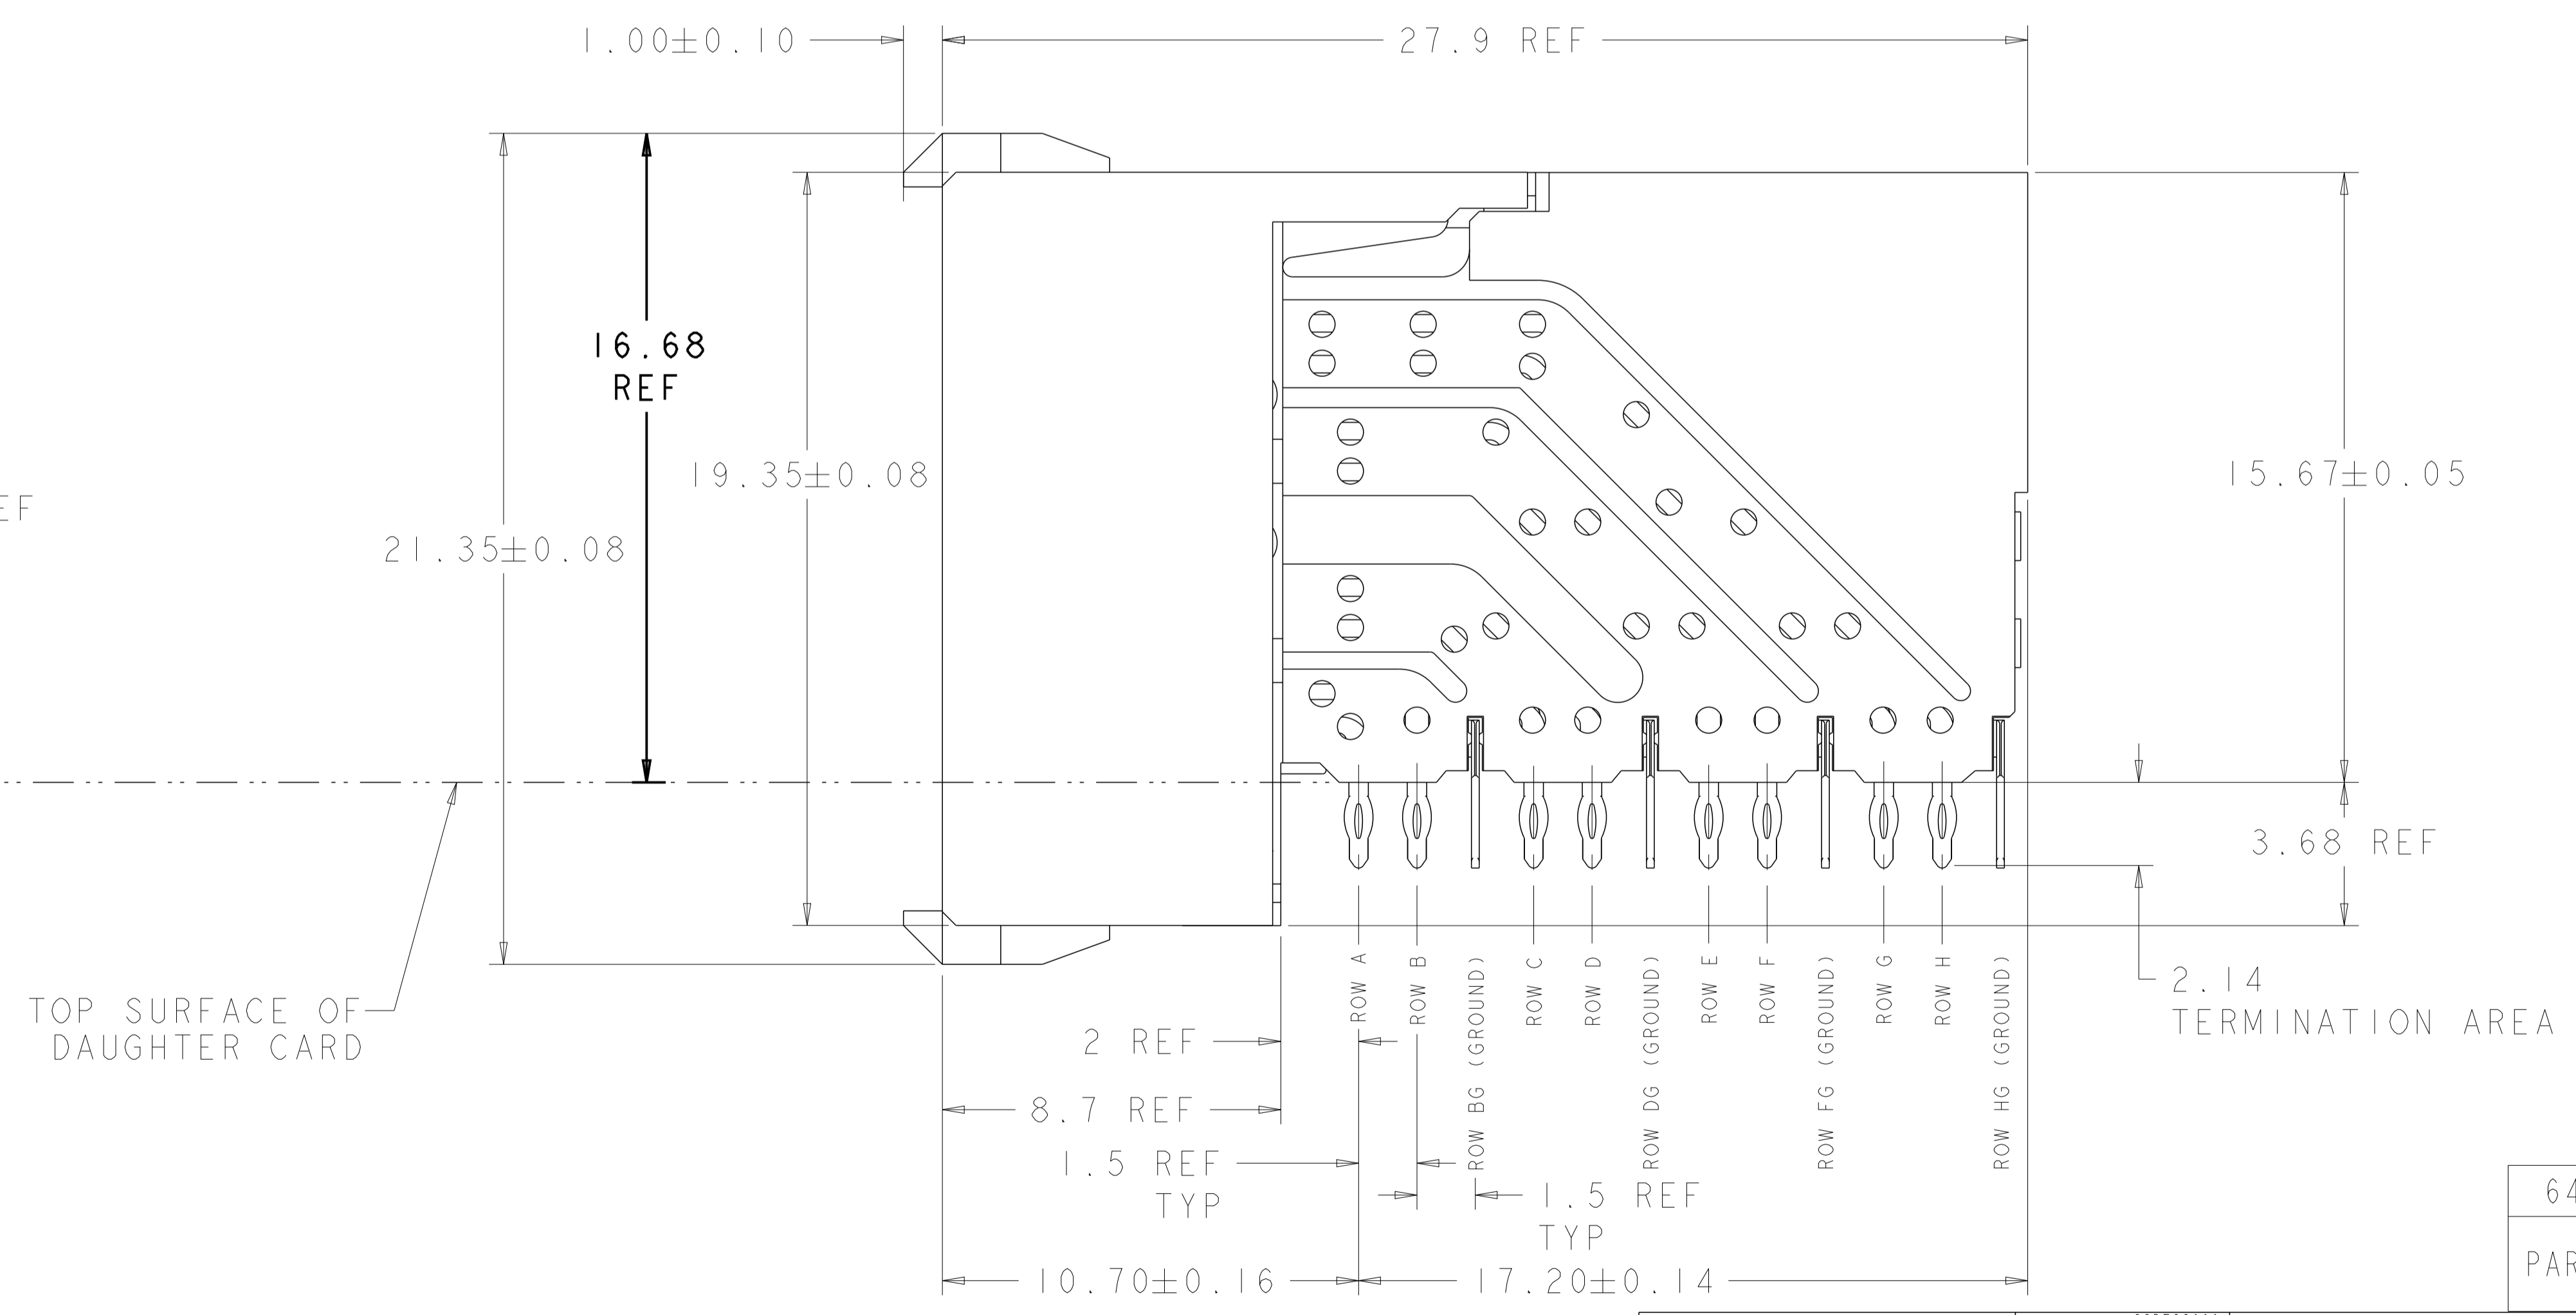

- 1 PCB HOLE DIM:  
 DRILLED HOLE = 0.700±0.025mm  
 FINISHED HOLE = 0.600±0.050mm  
 Cu THICKNESS = 0.0375±0.0125mm  
 SnPb THICKNESS = 0.007±0.003mm
- 2 MATERIAL:  
 SHIELD - PHOSPHOR BRONZE  
 CONTACT - COPPER-NICKEL-SILICON  
 HOUSING, CHICKLET AND CHICKLET COVER - GLASS FILLED POLYESTER
- 3 FINISH: CONTACT AND SHIELD  
 MATING AREA - MEETS THE PERFORMANCE REQUIREMENTS OF PRODCUT SPECIFICATION 108-2055; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS  
 COMPLIANT PIN AREA - 0.5µm MIN TIN OVER 1.27µm MIN NICKEL
- 4 CONNECTOR MARKED WITH DATE CODE IN APPROXIMATE AREA SHOWN
- 5 DIMENSION APPLIES TO CENTERLINE OF THRU HOLE.
- 6 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.

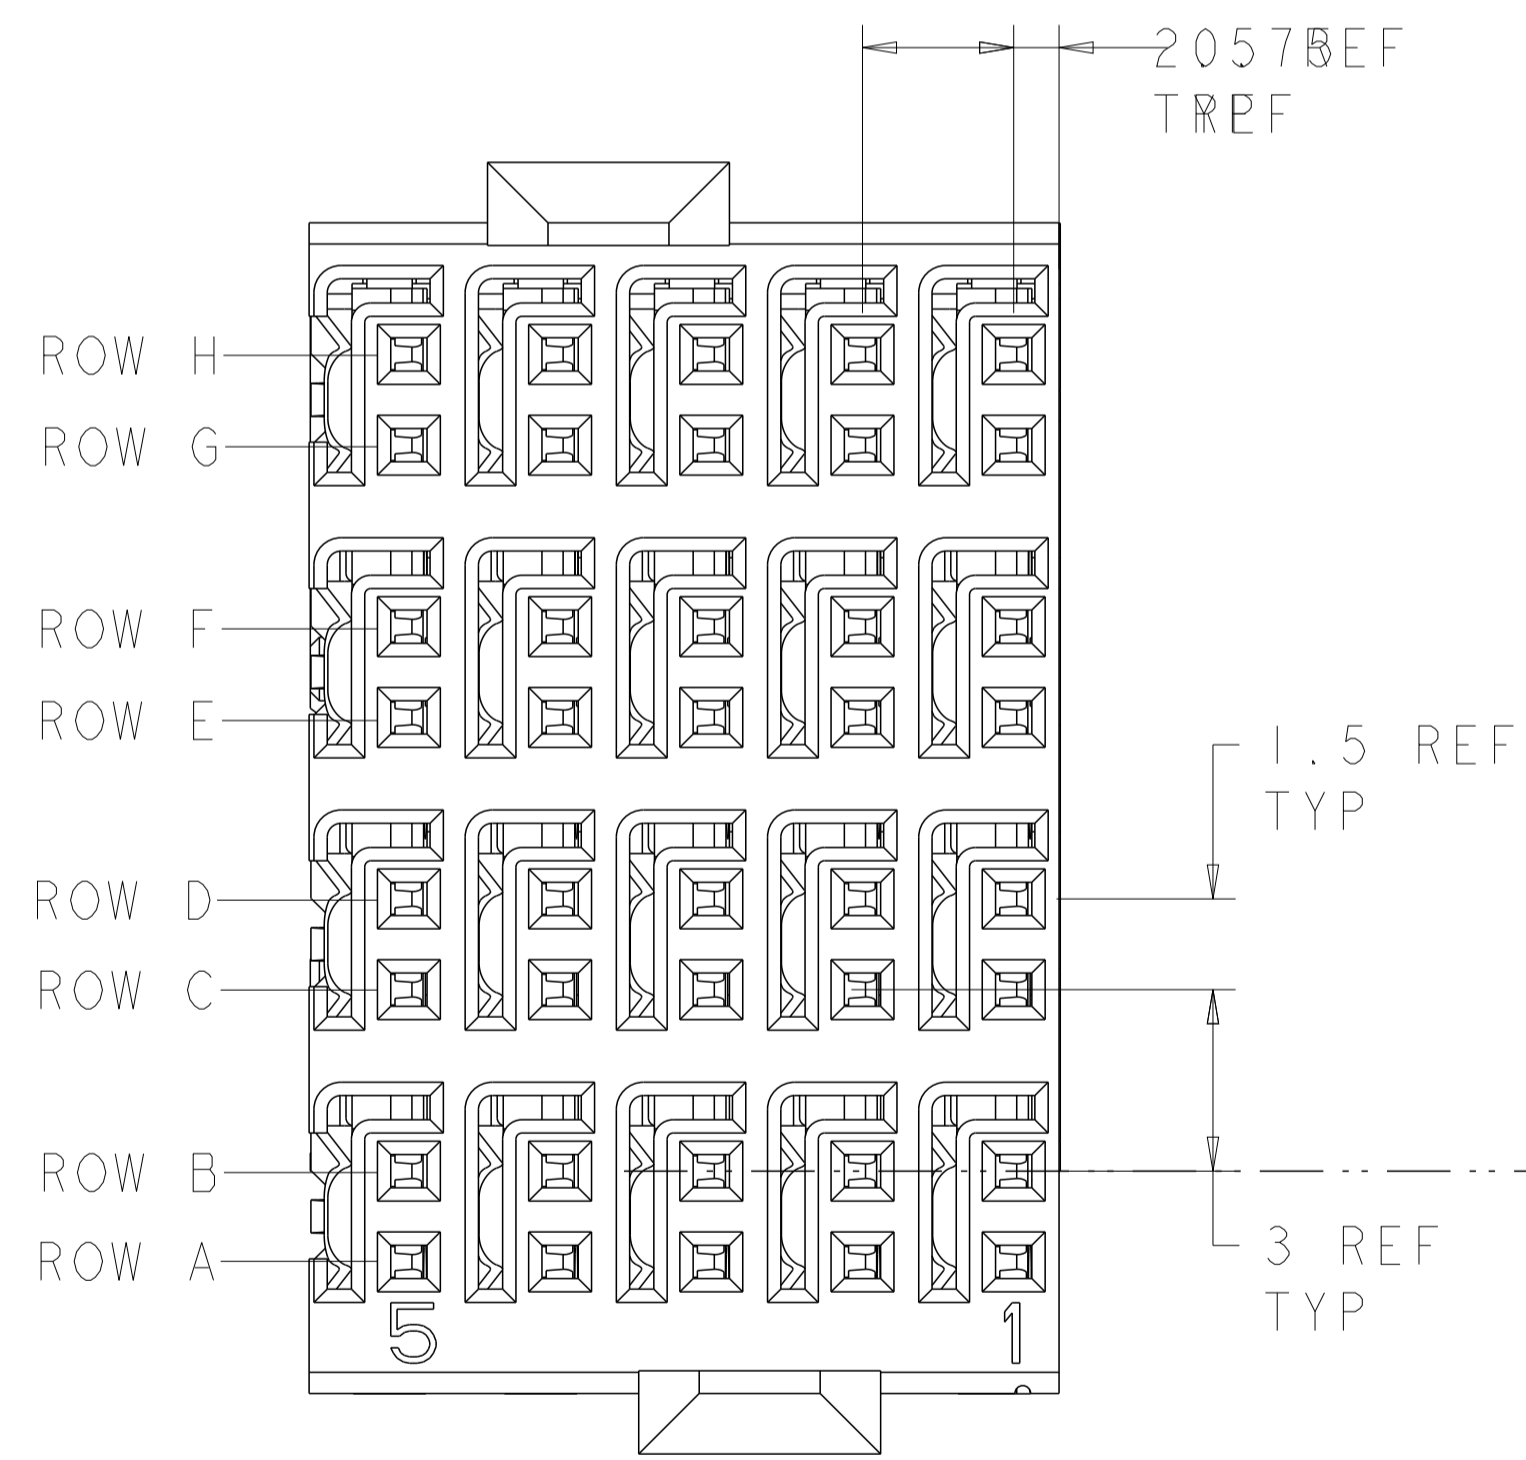

6469251-1  
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: D. HUMBERT 28DEC2009	TE Connectivity	
DIMENSIONS:		CHK: J. EARY 28DEC2009	NAME: RECEPTACLE ASSEMBLY, 4 PAIR, 12.5mm HMZd	
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD: J. EARY 28DEC2009	PRODUCT SPEC	
0 PLC	±	APPLICATION SPEC	SIZE: A100779C=6469251	
1 PLC	±	WEIGHT	RESTRICTED TO	
2 PLC	±	CUSTOMER DRAWING	SCALE: 8:1 SHEET 1 OF 1 REV E	
3 PLC	±			
4 PLC	±			
ANGLES	±			
FINISH	±			

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)