


FIG - 1 AS SHOWN
本図

注記;

- 1 適用規格 : 108-5315
製品規格 : 114-5147
取付適用規格 : 15-507J
- 2 取扱い説明書 : 66740V, 94V-0, グレー
- △ 材料及び色

NOTES;

- 1 APPLICABLE SPECIFICATIONS
PRODUCT SPEC. : 108-5315
APPLICATION SPEC. : 114-5147
- 2 INSTRUCTION SHEET: 15-507J
△ MATERIAL&COLOR : 66NYLON, 94V-0, GRAY

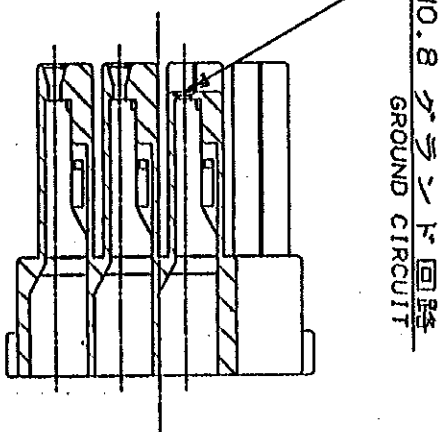

断面 A-A
SECT.

LTR	REVISION RECORD	DR	CHK	DATE
0	RELEASED	DR. T. FUTATSUGI	CHK. S. ANNO	8-14-74

WIRE RANGE	INSULATION DIA	FINISH
mm ² (AWG)	mmφ	
DR. T. FUTATSUGI	DE. I. ENOMOTO	
CHK. S. ANNO	APP. S. ANNO	

NAME	AMP LATTICE CONN. PLUG HOUSING 28POS
GENERAL TOLERANCE	0-0.2 10-0.3 30-0.5 50-0.8 ANGLES : 0.5°
SCALE	A3 J
REV.	0
SHEET	1 OF 1

Copyright © 1980
AMP (Japan) LTD.
ALL RIGHTS RESERVED.
AMP AMP (JAPAN), LTD.
Tokyo, Japan

CUSTOMER DRAWING

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)