


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		J2		REVISED PER ECO-12-001427	27JAN12	KH	MM

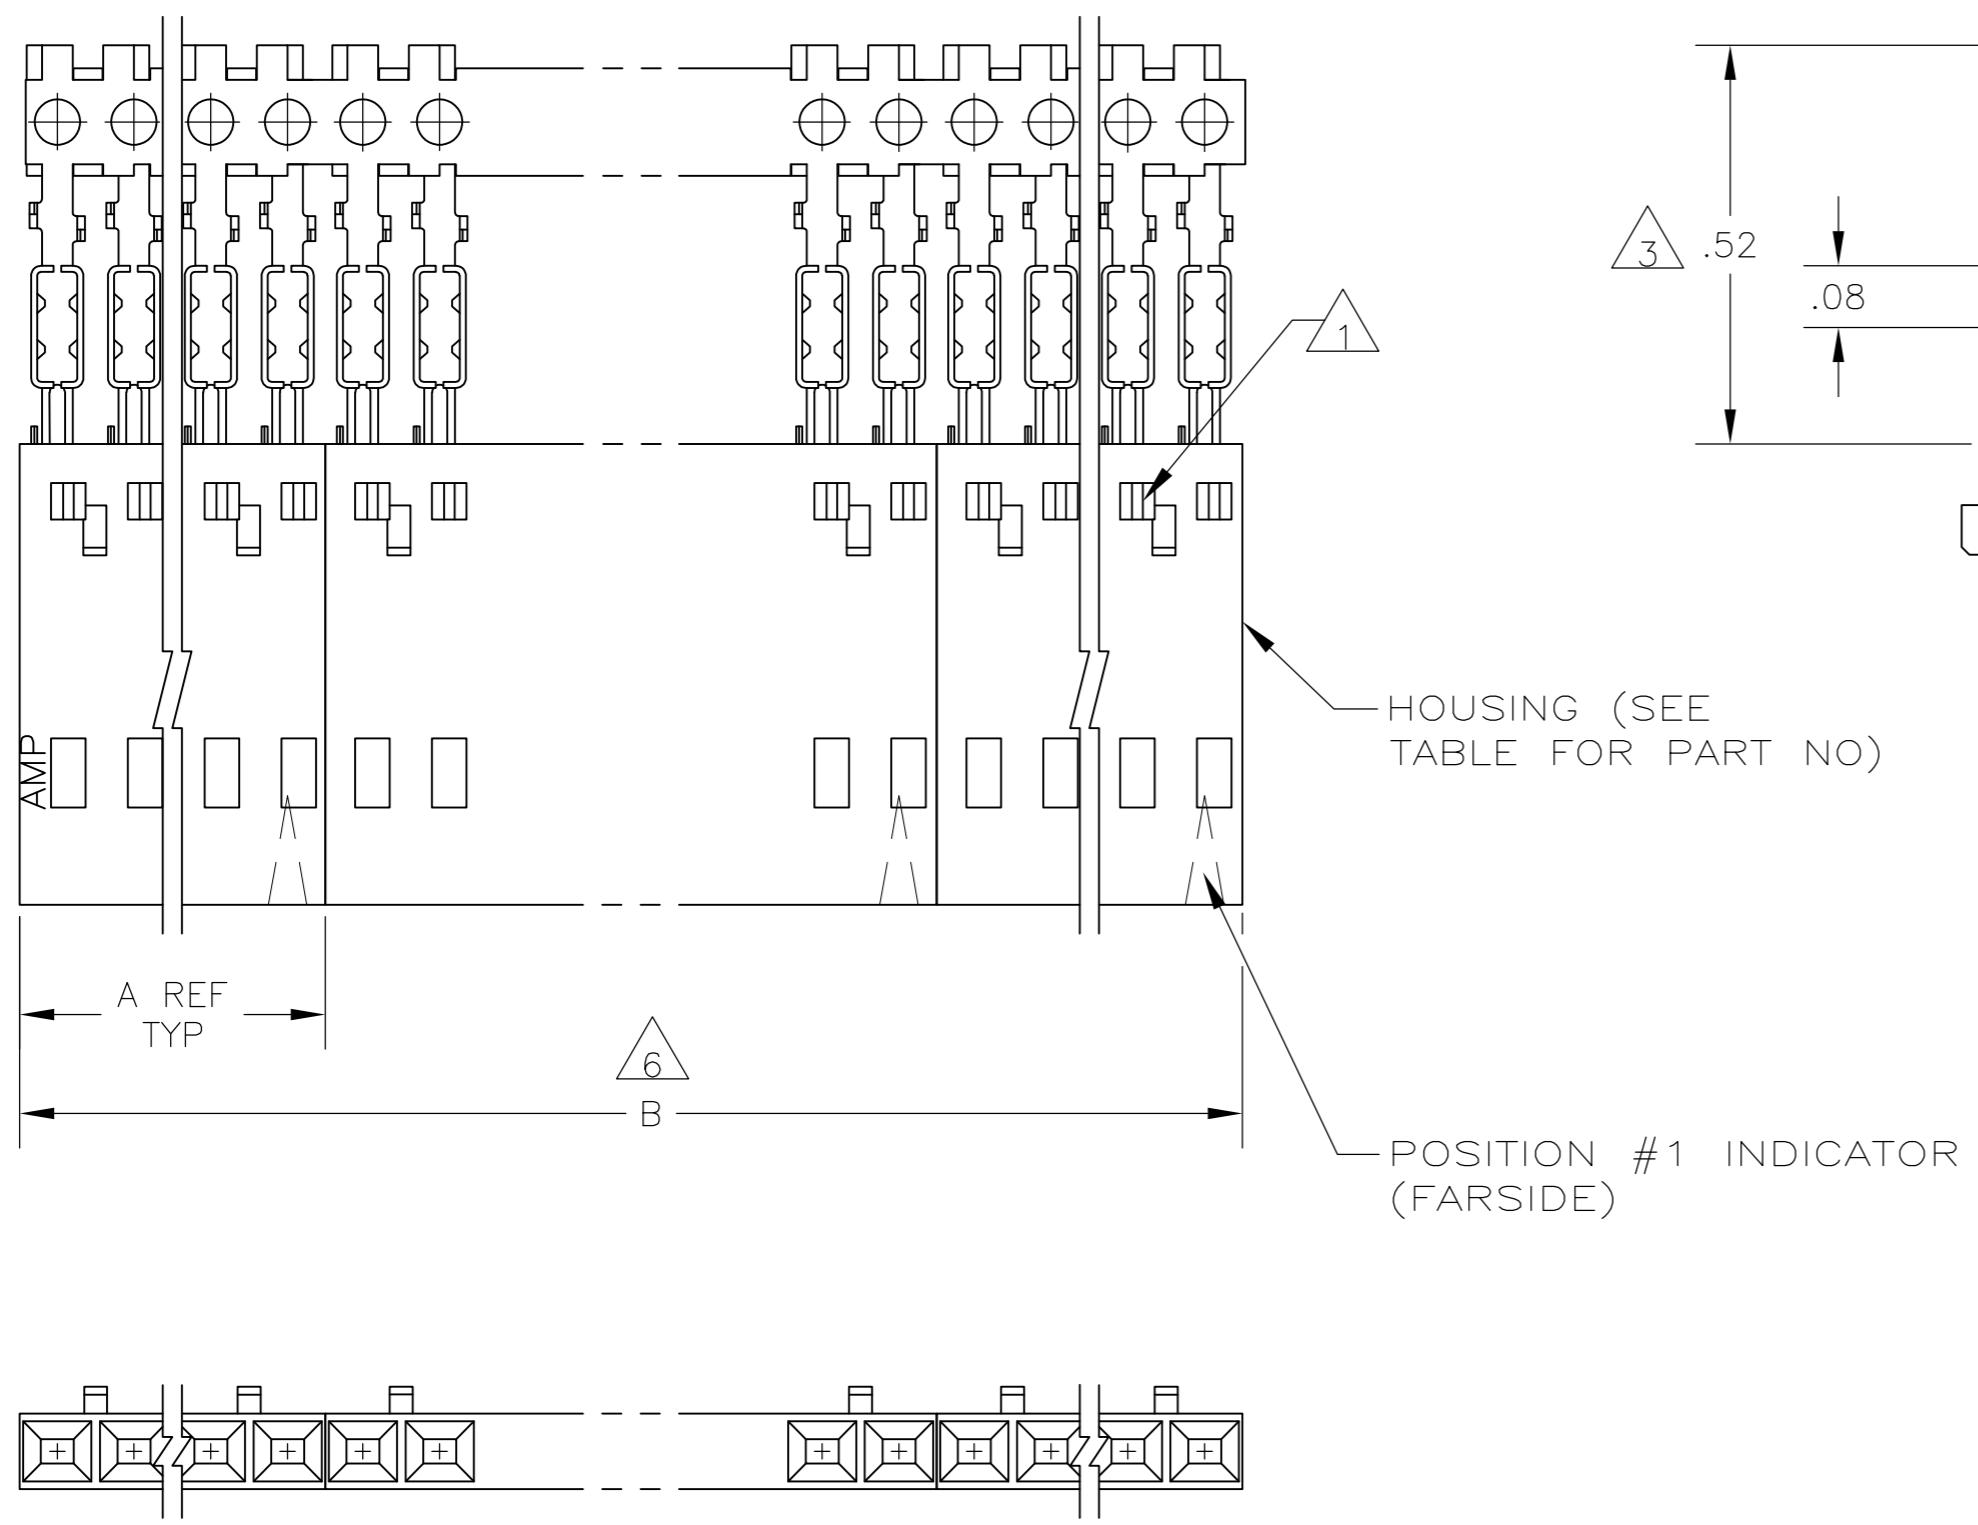

9	OBSOLETE	8	2	2.40	1.198	1-104503-1	12	6-103950-1
9	OBSOLETE	8	2	2.20	1.098	1-104503-0	11	6-103950-0
9	OBSOLETE	8	2	2.00	.998	104503-9	10	5-103950-9
9	OBSOLETE	8	2	1.80	.898	104503-8	9	5-103950-8
		8	2	1.60	.798	104503-7	8	5-103950-7
9	OBSOLETE	8	2	1.40	.698	104503-6	7	5-103950-6
		8	4	2.39	.598	104503-5	6	5-103950-5
9	OBSOLETE	8	4	1.99	.498	104503-4	5	5-103950-4
9	OBSOLETE	8	5	1.99	.398	104503-3	4	5-103950-3
9	OBSOLETE	8	5	1.49	.298	104503-2	3	5-103950-2
		8	10	1.98	.198	104503-1	2	5-103950-1
		7	2	2.40	1.198	1-104503-1	12	1-103950-1
9	OBSOLETE	7	2	2.20	1.098	1-104503-0	11	1-103950-0
9	OBSOLETE	7	2	2.00	.998	104503-9	10	103950-9
9	OBSOLETE	7	2	1.80	.898	104503-8	9	103950-8
9	OBSOLETE	7	2	1.60	.798	104503-7	8	103950-7
9	OBSOLETE	7	2	1.40	.698	104503-6	7	103950-6
9	OBSOLETE	7	4	2.39	.598	104503-5	6	103950-5
9	OBSOLETE	7	4	1.99	.498	104503-4	5	103950-4
9	OBSOLETE	7	5	1.99	.398	104503-3	4	103950-3
9	OBSOLETE	7	5	1.49	.298	104503-2	3	103950-2
9	SUPERSEDED	7	10	1.98	.198	104503-1	2	103950-1

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103654
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL
- 8 .000100-.000200 MATTE TIN OVER .000050 NICKEL
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. MAYER 11-5-86	
DIMENSIONS: INCHES		CHK P.C.deYONG 11-12-86	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD JEFF SCHEIFFER 11-13-86	NAME PIN ASSEMBLY, AMPMODU MTE, SINGLE ROW, .100 C/L WITH GUIDE RIBS, FOR #22-#26 AWG WIRE SIZE, STRIP FORM
0 PLC ± - 1 PLC ± - 2 PLC ± .02 3 PLC ± .005 4 PLC ± - ANGLES ± - FINISH SEE TABLE		PRODUCT SPEC 108-25034	
MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK; PINS: PHOS BRONZE		APPLICATION SPEC 114-25026	SIZE A2
		WEIGHT -	CAGE CODE 00779
		CUSTOMER DRAWING	DRAWING NO C=103950
		SCALE 4:1	RESTRICTED TO -
		SHEET 1 of 1	REV J2

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)