


REV. 0
DCO 170305

COIL: @ 25°C	550 OHMS ± 15 %
RESISTANCE	
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	6.98 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:	
VIBRATION	55 CPS TO 2000 CPS @ 10 g's
SHOCK	50 g's 11 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE AND RELEASE 6 MS MAX.
DIELECTRIC 1000 VAC (500 VDC - OPEN CONTACTS)

CUSTOMER DATA SHEET

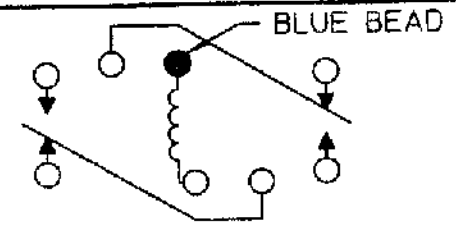

TERMINAL VIEW

CONTACT RATING: 2 AMPS RESISTIVE @ 28 VDC
1 AMP RESISTIVE @ 115 VOLTS (CASE NOT GROUNDED)

DR. PBB 10/31/00 CKTLG 11-1-00



CUST. CII STD
CUST. NO. _____ REV. _____

3SAE RELAY

3SAE5011K1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)