

4





3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
DW		G8	REVISED (ECR-18-009050)	05JUL18	T.Z S.L

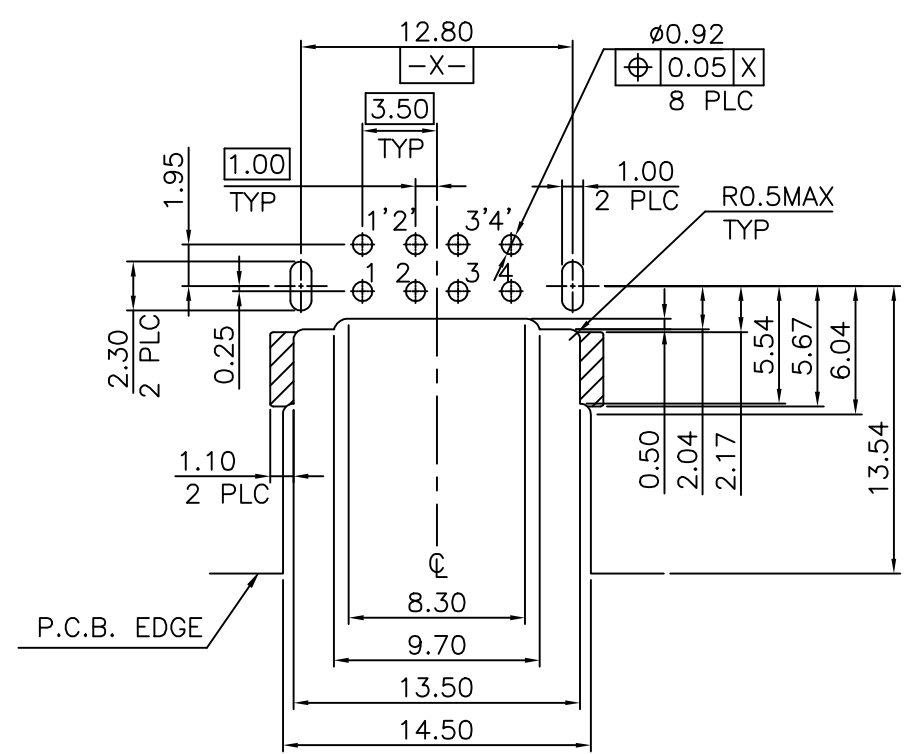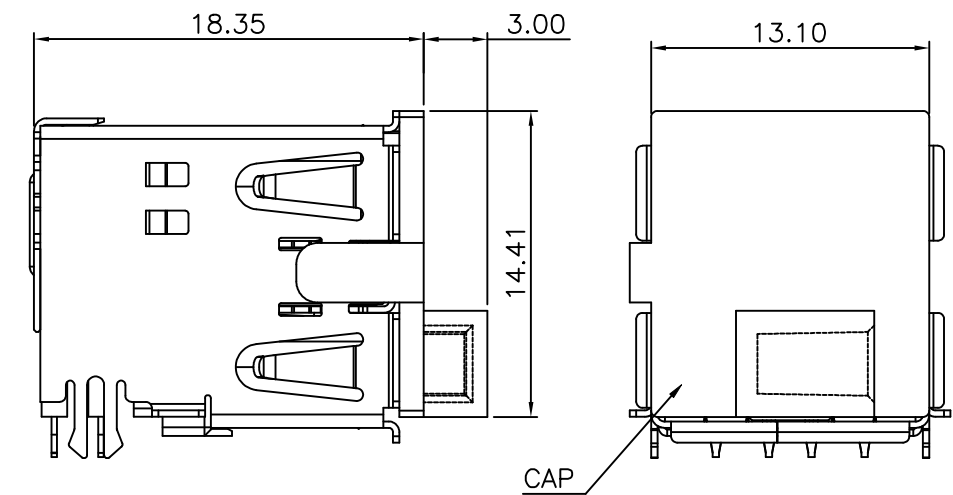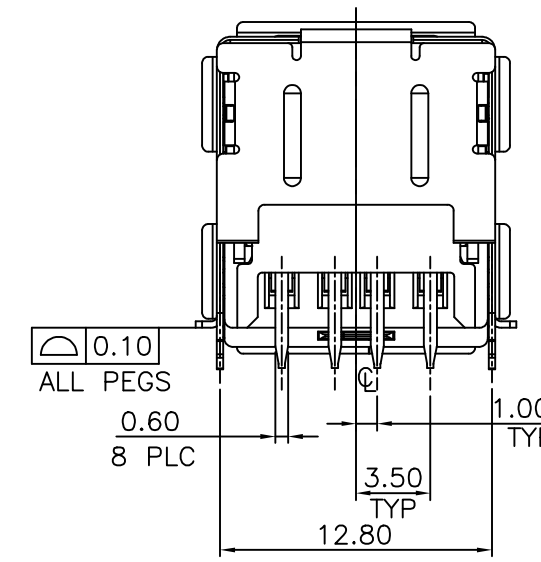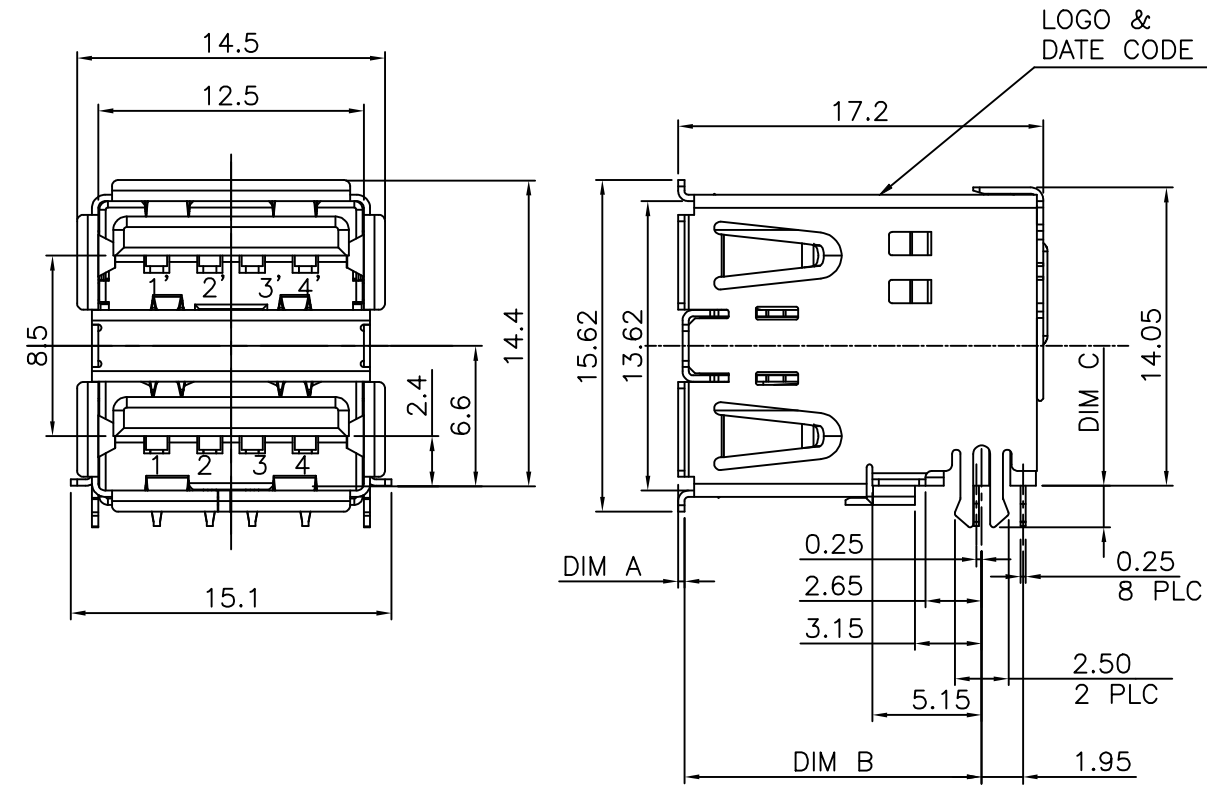

RECOMMEND P.C.B LAYOUT (THICKNESS 1.2~1.4mm)
 (COMPONENT SIDE) TOLERANCE ±0.05mm






- NOTES:
- MATERIAL:
 - HOUSING: PA9T WITH 33% GF, UL 94V-0 RATED, BLACK COLOR.
 - SPACER: PA9T WITH 33% GF, UL 94V-0 RATED, BLACK COLOR.
 - CAP: PA9T WITH 33% GF, UL 94V-0 RATED, BLACK COLOR.
 - CONTACT: PHOSPHOR BRONZE.
 - FRONT SHIELD: SUS304 1/2H.
 - REAR SHIELD: SPCC
 - GROUNDING STRIP: SUS304 1/2H
 - FINISH:
 - CONTACT: 0.762mm [30m"] MIN. GOLD PLATING ON CONTACT AREA. 3.048mm [120m"] MIN. MATTE TIN PLATING ON SOLDER TAILS, WITH ENTIRE CONTACT UNDERPLATED 1.27mm [50m"] MIN. NICKEL.
 - FRONT SHIELD: 0.762mm [30m"] MIN. SOLERABLE NICKEL PLATING OVERALL.
 - REAR SHIELD: 0.762mm [30m"] MIN. NICKEL PLATING. 0.762mm [30m"] MIN. Cu UNDER PLATING OVERALL.
 - GROUNDING STRIP: 0.762mm [30m"] MIN. SOLDERABLE NICKEL PLATING OVERALL.
 - REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

DIM C	DIM B	DIM A	CAP	PACKAGE	PART NUMBER	NOTE
1.90	14.30	0	W/	TAPE & REEL	1734062-3	
2.20	13.95	0.35	W/O	TUBE	1734062-2	OBSOLETE
				TAPE & REEL	1734062-1	OBSOLETE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	F. YANG	10SEP2009	TE Connectivity	
DIMENSIONS: MM		CHK	S. CHIEN	10SEP2009		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	W. KODAMA	10SEP2009	NAME	
0 PLC ± - 1 PLC ± 0.35 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± 3°		PRODUCT SPEC		108-57481		
MATERIAL		QUALIFICATION TEST REPORT		501-57557		
SEE NOTE		FINISH		SEE NOTE		
		WEIGHT		4.71 GRAMS		
		CUSTOMER DRAWING		SCALE		
		SHEET		1 of 24		
		REV		G8		

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC DW	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1.			

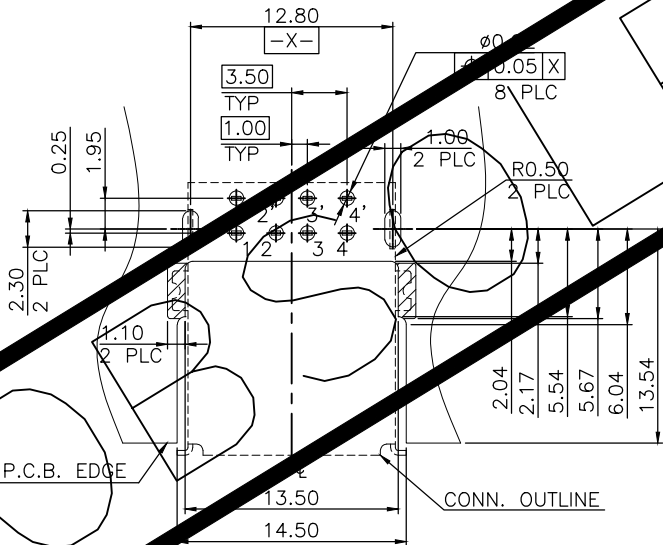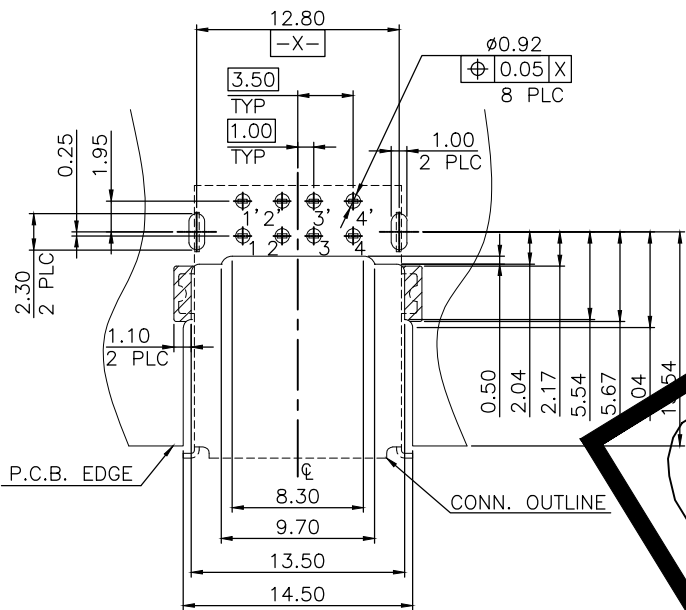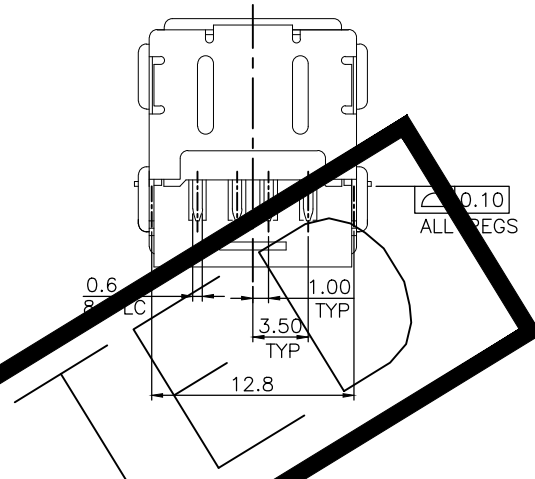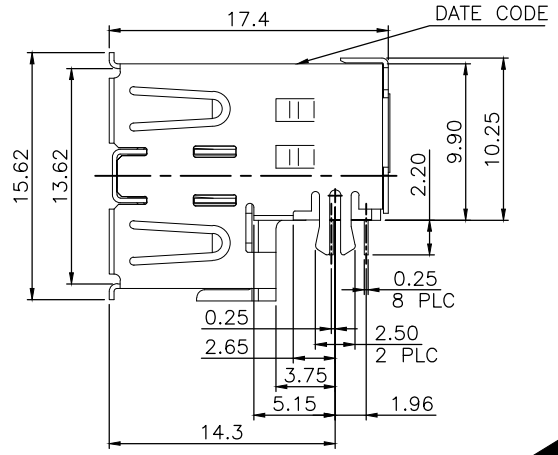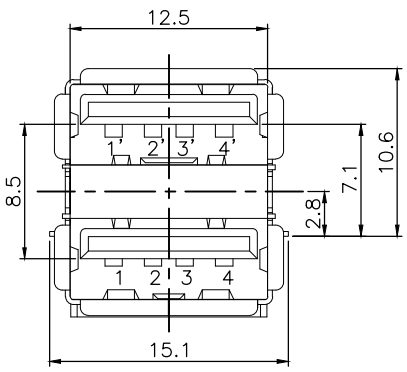

NOTE:
 1. MATERIAL:
 HOUSING: PART WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 SPACER: PART WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 CONTACT: PHOSPHOR BRONZE.
 FRONT SHIELD: BRASS.
 REAR SHIELD: SPCC.
 GROUNDING STRIP: BRASS.
 FINISH:
 CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA.
 3.048μm [120μ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS,
 WITH ENTIRE CONTACT UNDERPLATED 1.27μm [50μ"] MIN. NICKEL.
 FRONT SHIELD: 0.762μm [30μ"] MIN. NICKEL PLATING.
 0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.
 REAR SHIELD: 0.762μm [30μ"] MIN. NICKEL PLATING.
 0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.
 GROUNDING STRIP: 0.762μm [30μ"] MIN. NICKEL PLATING.
 0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.
 2. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

RECOMMEND P.C.B LAYOUT (THICKNESS 1.2~1.4mm)
 (COMPONENT SIDE) TOLERANCE±0.05mm

RECOMMEND P.C.B LAYOUT (THICKNESS 1.2~1.4mm)
 (COMPONENT SIDE) TOLERANCE±0.05mm

OBSOLETE	TUBE	1-1734062-2
OBSOLETE	TAPE & REEL	1-1734062-1
NOTE	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity			
DIMENSIONS: MM		CHK				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME			
0 PLC ± . 1 PLC ± 0.35 2 PLC ± 0.25 3 PLC ± . 4 PLC ± . ANGLES ± 3°		PRODUCT SPEC	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE			
MATERIAL SEE NOTE		QUALIFICATION TEST REPORT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
FINISH SEE NOTE		WEIGHT 4.71 GRAMS	A300779	C-1734062		
CUSTOMER DRAWING			SCALE	SHEET 2 of 24	REV G8	

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC
DW

DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

LOGO &
DATE CODE

NOTE:

1. MATERIAL:
HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
SPACER: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
FRONT SHIELD: BRASS.
REAR SHIELD: SPCC.
GROUNDING STRIP: BRASS.

2. FINISH:
CONTACT: $0.76\mu\text{m}$ [30μ] MIN. GOLD PLATING ON CONTACT AREA.
 $3.048\mu\text{m}$ [120μ] MIN. BRIGHT TIN PLATING ON SOLDER TAIL,
WITH ENTIRE CONTACT UNDERPLATED $1.27\mu\text{m}$ [50μ] MIN. NICKEL.
FRONT SHIELD: $0.76\mu\text{m}$ [30μ] MIN. NICKEL PLATING.
 $0.76\mu\text{m}$ [30μ] MIN. Cu UNDER PLATING OVERALL.
REAR SHIELD: $0.762\mu\text{m}$ [30μ] MIN. NICKEL PLATING.
 $0.762\mu\text{m}$ [30μ] MIN. Cu UNDER PLATING OVERALL.
GROUNDING STRIP: $0.762\mu\text{m}$ [30μ] MIN. NICKEL PLATING.
 $0.762\mu\text{m}$ [30μ] MIN. Cu UNDER PLATING OVERALL.

3. REFLOW SOLDER CAPABLE TO 260°C PER TE
SPEC 109-201, CONDITION B.

P.C.B. EDGE

RECOMMEND P.C.B LAYOUT (THICKNESS 1.2mm)
(COMPONENT SIDE) TOLERANCE $\pm 0.05\text{mm}$

OBSOLETE	TRAY	2-1734062-2
OBSOLETE	TUBE	2-1734062-1
	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
MM	
	0 PLC \pm
	1 PLC ± 0.35
	2 PLC ± 0.25
	3 PLC \pm
	4 PLC \pm
	ANGLES $\pm 3'$
MATERIAL	FINISH
SEE NOTE	SEE NOTE

DWN	TE Connectivity		
CHK	NAME		
APVD	PRODUCT SPEC		
PRODUCT SPEC	QUALIFICATION TEST REPORT		
QUALIFICATION TEST REPORT	SIZE	CAGE CODE	DRAWING NO
RESTRICTED TO	WEIGHT	A300779 C-1734062	
RESTRICTED TO	CUSTOMER DRAWING	SCALE	SHEET 3 of 24
REV G8			

AMP 1470-19 REV 31MAR2000

Downloaded From Oneyac.com

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC
DW

DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

NOTES:

MATERIAL:
HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
SPACER: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
FRONT SHIELD: BRASS.
REAR SHIELD: SPCC.
GROUNDING STRIP: STAINLESS.

2

FINISH:
CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA.
3.048μm [120μ"] MIN. MATTE TIN PLATING ON SOLDER TAILS.
1.27μm [50μ"] MIN. NICKEL UNDERPLATED WITH ENTIRE CONTACT.
FRONT SHIELD: 0.762μm [30μ"] MIN. NICKEL PLATING.
0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.
REAR SHIELD: 0.762μm [30μ"] MIN. NICKEL PLATING.
0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.

3

FINISH:
CONTACT: 0.254μm [10μ"] MIN. GOLD PLATING ON CONTACT AREA.
3.048μm [120μ"] MIN. MATTE TIN PLATING ON SOLDER TAILS.
1.27μm [50μ"] MIN. NICKEL UNDERPLATED WITH ENTIRE CONTACT.
FRONT SHIELD: 0.762μm [30μ"] MIN. NICKEL PLATING.
0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.
SPUTTERING/BLACK PLATING IN FRONT SURFACE.
REAR SHIELD: 0.762μm [30μ"] MIN. NICKEL PLATING.
0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.
GROUNDING STRIP: SPUTTERING/BLACK PLATING IN FRONT SURFACE.
4. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

RECOMMENDED MOUNT DIMENSION

RECOMMEND P.C.B LAYOUT (THICKNESS 1.4~1.6mm)
(COMPONENT SIDE) TOLERANCE ±0.05mm

OBSOLETE	△	TAPE & REEL	3-1734062-4
OBSOLETE		TAPE & REEL	3-1734062-3
	△	TUBE	3-1734062-2
		TRAY	3-1734062-1
		FINISH	PACKAGE PART NUMBER




THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		TE Connectivity	
DIMENSIONS:		CHK			
MM		APVD		NAME	
		PRODUCT SPEC		USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		QUALIFICATION TEST REPORT		SIZE CAGE CODE DRAWING NO	
0 PLC ±		WEIGHT 4.71 GRAMS		A300779 C-1734062	
1 PLC ±0.35		CUSTOMER DRAWING		RESTRICTED TO	
2 PLC ±0.25		SCALE		SHEET 4 of 24	
3 PLC ±		REV		G8	
4 PLC ±					
ANGLES ±3'					
MATERIAL SEE NOTE					
FINISH SEE NOTE					

AMP 1470-19 REV 31MAR2000

Downloaded From Oneyac.com

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
DW		P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1.			

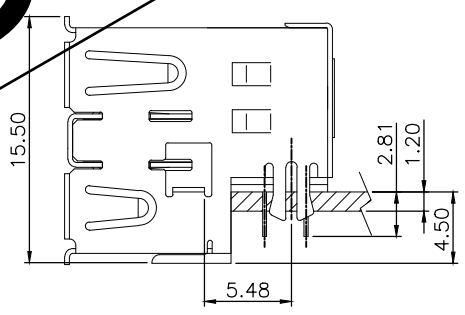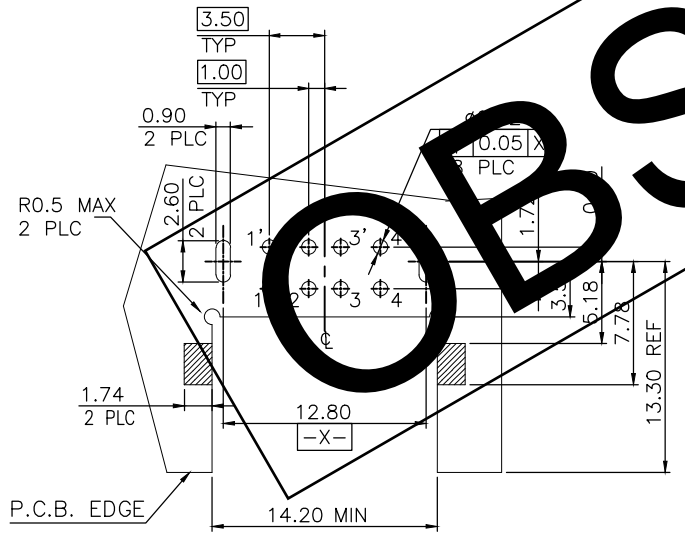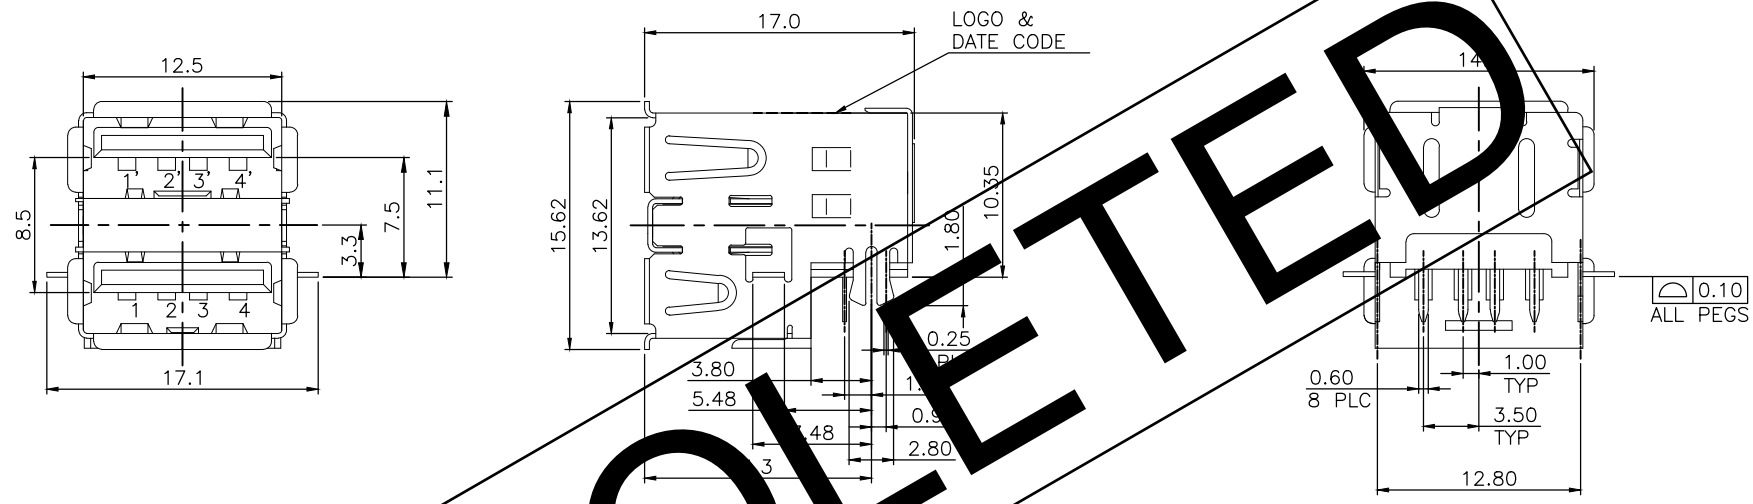

RECOMMENDED MOUNT DIMENSION

- NOTES:
- MATERIAL:
 HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 SPACER: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 CONTACT: PHOSPHOR BRONZE.
 FRONT SHIELD: BRASS.
 REAR SHIELD: SPCC.
 GROUNDING STRIP: BRASS.
 - FINISH:
 CONTACT: 0.762µm [30µ"] MIN. GOLD PLATING ON CONTACT AREA.
 3.048µm [120µ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS.
 WITH ENTIRE CONTACT UNDERPLATED 1.27µm [50µ"] MIN. NICKEL.
 FRONT SHIELD: 0.762µm [30µ"] MIN. NICKEL PLATING.
 0.762µm [30µ"] MIN. Cu UNDER PLATING OVERALL.
 REAR SHIELD: 0.762µm [30µ"] MIN. NICKEL PLATING.
 0.762µm [30µ"] MIN. Cu UNDER PLATING OVERALL.
 GROUNDING STRIP: 0.762µm [30µ"] MIN. NICKEL PLATING.
 0.762µm [30µ"] MIN. Cu UNDER PLATING OVERALL.
 - REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.






RECOMMEND P.C.B LAYOUT (THICKNESS 1.0~1.4mm)
 (COMPONENT SIDE) TOLERANCE ±0.05mm

OBSELETE	TUBE	4-1734062-1
	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity	
DIMENSIONS: MM		CHK		
		APVD	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE	
0 PLC ±		QUALIFICATION TEST REPORT	SIZE	RESTRICTED TO
1 PLC ± 0.35		WEIGHT 4.71 GRAMS	CAGE CODE	DRAWING NO
2 PLC ± 0.25			A3 00779	
3 PLC ±		CUSTOMER DRAWING	SCALE	SHEET 5 OF 24
4 PLC ±			REV G8	
ANGLES ± 3'				
MATERIAL SEE NOTE	FINISH SEE NOTE			

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
DW		SEE SHEET 1.			

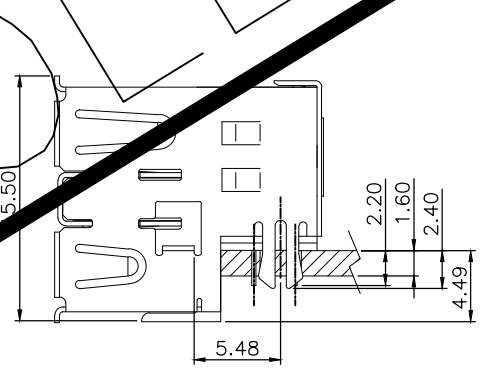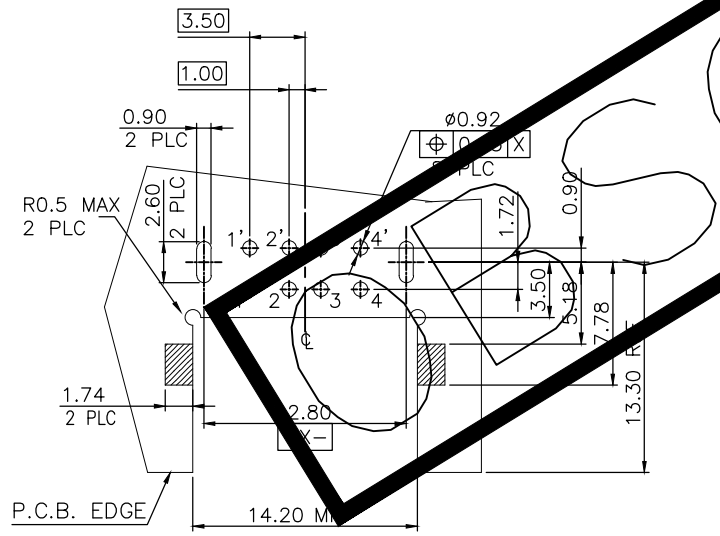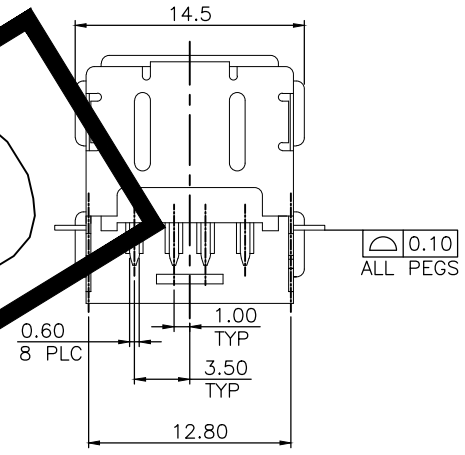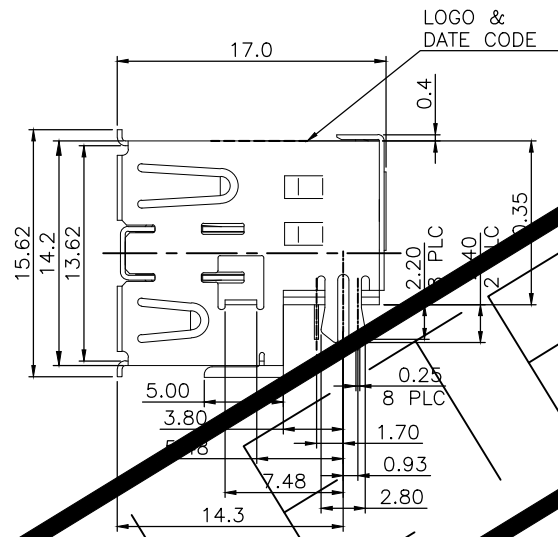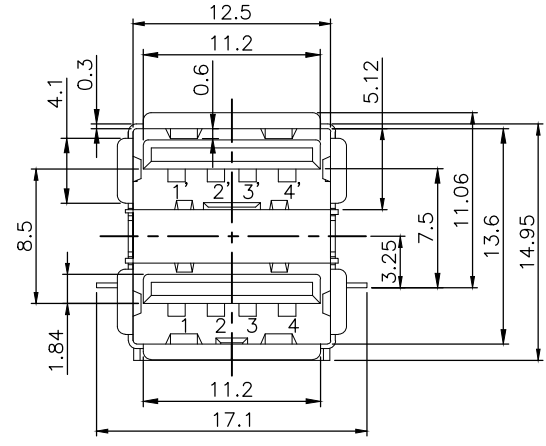

NOTES:

- MATERIAL:
 HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 SPACER: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 CONTACT: PHOSPHOR BRONZE.
 FRONT SHIELD: SUS.
 REAR SHIELD: SPCC.
 GROUNDING STRIP: SUS.
- FINISH:
 CONTACT: 0.762µm [30µ"] MIN. GOLD PLATING ON CONTACT AREA.
 3.048µm [120µ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS.
 WITH ENTIRE CONTACT UNDERPLATED 1.27µm [50µ"] MIN. NICKEL.
 FRONT SHIELD: 0.762µm [30µ"] MIN. NICKEL PLATING OVERALL.
 REAR SHIELD: 0.762µm [30µ"] MIN. NICKEL PLATING.
 0.762µm [30µ"] MIN. Cu UNDER PLATING OVERALL.
- REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

RECOMMENDED MOUNT DIMENSION

RECOMMEND P.C.B LAYOUT (THICKNESS 1.6mm)
 (COMPONENT SIDE) TOLERANCE ±0.05mm

OBSOLETE	TAPE & REEL	4-1734062-2
	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		TE Connectivity	
DIMENSIONS: MM		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.35 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± 3°		APVD		NAME	
MATERIAL SEE NOTE		FINISH SEE NOTE		USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE	
		PRODUCT SPEC		SIZE	
		QUALIFICATION TEST REPORT		CAGE CODE	
		WEIGHT 4.71 GRAMS		DRAWING NO	
		CUSTOMER DRAWING		RESTRICTED TO	
		A300779		G-1734062	
		SCALE		SHEET 6 of 24	
				REV G8	

4 3 2 1

THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION	
© COPYRIGHT BY TYCO ELECTRONICS CORPORATION.		ALL RIGHTS RESERVED.	

LOC	DIST	REVISIONS					
DW		P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1.			

13.1 LOGO & DATE CODE
2.00 2 PLC
14.5
17.1

0.90 2 PLC
2.60 2 PLC
1.72
0.90
3.50
5.18
7.78
13.30 REF
1.74 2 PLC
12.80
14.20 MIN.

Ø0.92
±0.05 X
8 PLC

3.50
1.00

RO.5 MAX. 2 PLC

P.C.B. EDGE

NOTES:

- MATERIAL:
HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
SPACER: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
FRONT SHIELD: SUS.
REAR SHIELD: SPCC.
GROUNDING STRIP: SUS.
- FINISH:
CONTACT: 0.762µm [30µ" MIN. GOLD PLATING ON CONTACT AREA, 2.540µm [100µ" MIN. BRIGHT PLATING ON SOLDERTAILS, WITH ENAMEL CONTACT UNDERPLATED 1.27µm [50µ" MIN. NICKEL.
FRONT SHIELD: 0.762µm [30µ" MIN. NICKEL PLATING OVERALL.
REAR SHIELD: 0.762µm [30µ" MIN. NICKEL PLATING OVERALL.
GROUNDING STRIP: 0.762µm [30µ" MIN. CHROMIUM PLATING OVERALL.
- REFLOW SOLDER: CAPABLE TO 260°C PER MIL-STD SPEC 109-201, CONDITION B.

RECOMMEND P.C.B LAYOUT (THICKNESS 1.6mm)
(COMPONENT SIDE) TOLERANCE ±0.05mm

12.5
11.2
0.6
PIN 1'
4.9
5.12
8.5
7.5
1.84
PIN 1
11.9
PIN 4
3.25
13.6
14.95

17.0
15.62
14.2
13.62
2 PLC
0.50 STD OFF
0.60 8 PLC
1.00 TYP
0.30 2 PLC
3.50 TYP
12.80
14.3

0.25 8 PLC
0.93
1.70
2.80
2.20 8 PLC

DETAIL A
SCALE 2:1

TAPE & REEL 4-1734062-3
PACKAGE PART NUMBER

RECOMMENDED MOUNT DIMENSION






15.65
5.48
2.20
1.60
2.40
4.59

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		TE Connectivity	
DIMENSIONS: MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
0 PLC ±		1 PLC ±0.35		PRODUCT SPEC	
1 PLC ±0.35		2 PLC ±0.25		QUALIFICATION TEST REPORT	
2 PLC ±0.25		3 PLC ±		SIZE CAGE CODE DRAWING NO	
3 PLC ±		4 PLC ±		RESTRICTED TO	
4 PLC ±		ANGLES ±3'		WEIGHT 4.25 GRAMS A300779 C-1734062	
MATERIAL SEE NOTE		FINISH SEE NOTE		CUSTOMER DRAWING	
				SCALE SHEET 7 of 24 REV G8	

AMP 1470-19 REV 31MAR2000 Downloaded From Oneyac.com

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC DW	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

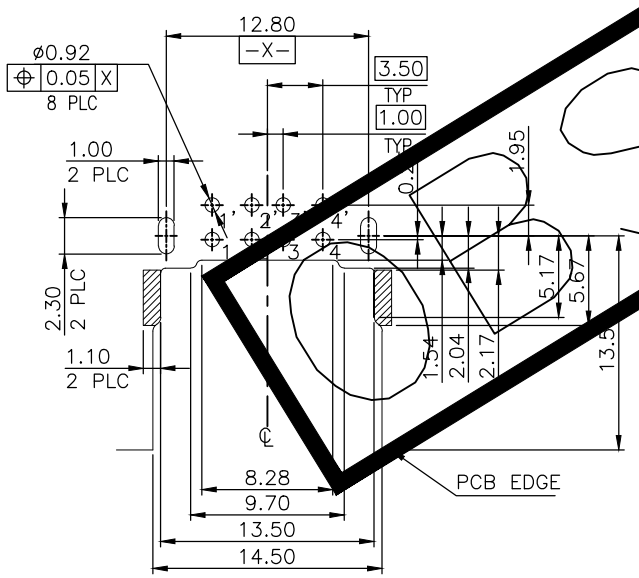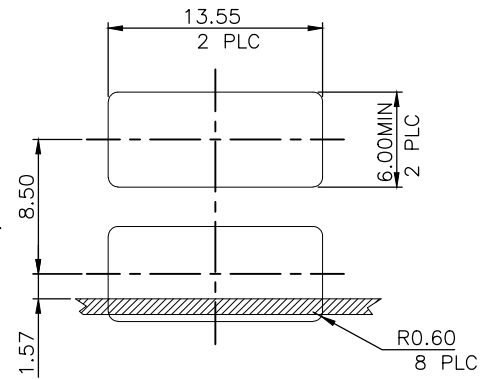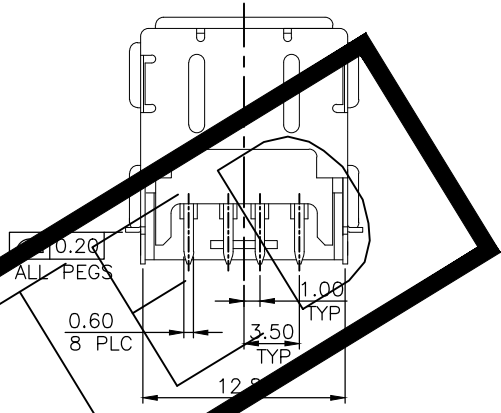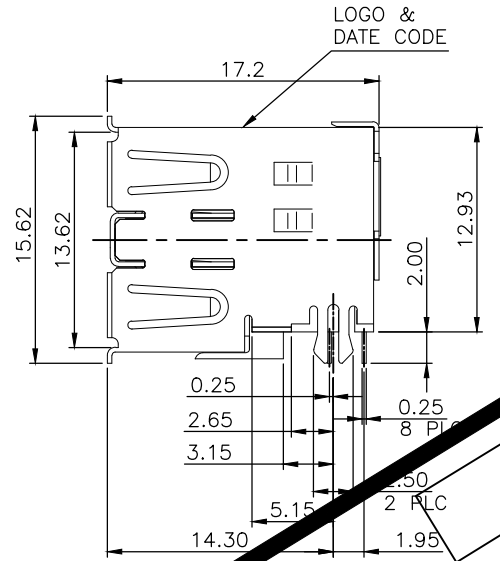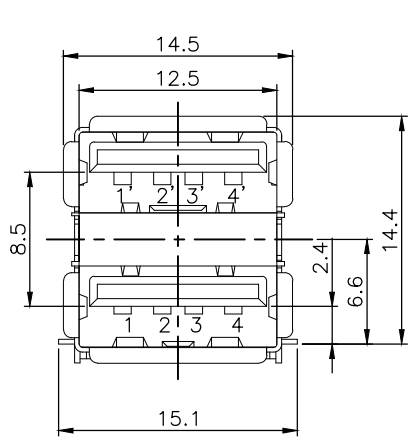

NOTES:

- MATERIAL:
 HOUSING: NYLON 66 WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 SPACER: NYLON 66 WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 CONTACT: PHOSPHOR BRONZE.
 FRONT SHIELD: BRASS.
 REAR SHIELD: SPCC.
 GROUNDING STRIP: BRASS.
- FINISH:
 CONTACT: 0.762µm [30µ"] MIN. GOLD PLATING ON CONTACT AREA.
 3.048µm [120µ"] MIN. BRIGHT-TIN PLATING ON SOLDERTAILS.
 WITH ENTIRE CONTACT UNDERPLATED 1.27µm [50µ"] MIN. NICKEL.
 FRONT SHIELD: 0.762µm [30µ"] MIN. NICKEL PLATING.
 0.762µm [30µ"] MIN. Cu UNDER PLATING OVERALL.
 REAR SHIELD: 0.762µm [30µ"] MIN. NICKEL PLATING.
 0.762µm [30µ"] MIN. Cu UNDER PLATING OVERALL.
 GROUNDING STRIP: 0.762µm [30µ"] MIN. NICKEL PLATING.
 0.762µm [30µ"] MIN. Cu UNDER PLATING OVERALL.
- REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.


OBSOLETE	TRAY	5-1734062-2
OBSOLETE	TAPE & REEL	5-1734062-1
	PACKAGE	PART NUMBER

RECOMMEND P.C.B LAYOUT (THICKNESS 1.0mm)
 (COMPONENT SIDE) TOLERANCE ±0.05mm

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity		
DIMENSIONS: MM		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME		
0 PLC ± .	1 PLC ± 0.35	PRODUCT SPEC	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE		
2 PLC ± 0.25	3 PLC ± .	QUALIFICATION TEST REPORT	SIZE	CAGE CODE	DRAWING NO
4 PLC ± .	ANGLES ± 3'	WEIGHT	A3	00779	C-1734062
MATERIAL SEE NOTE	FINISH SEE NOTE	CUSTOMER DRAWING	RESTRICTED TO	SCALE	SHEET 8 OF 24
					REV G8

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC DW	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

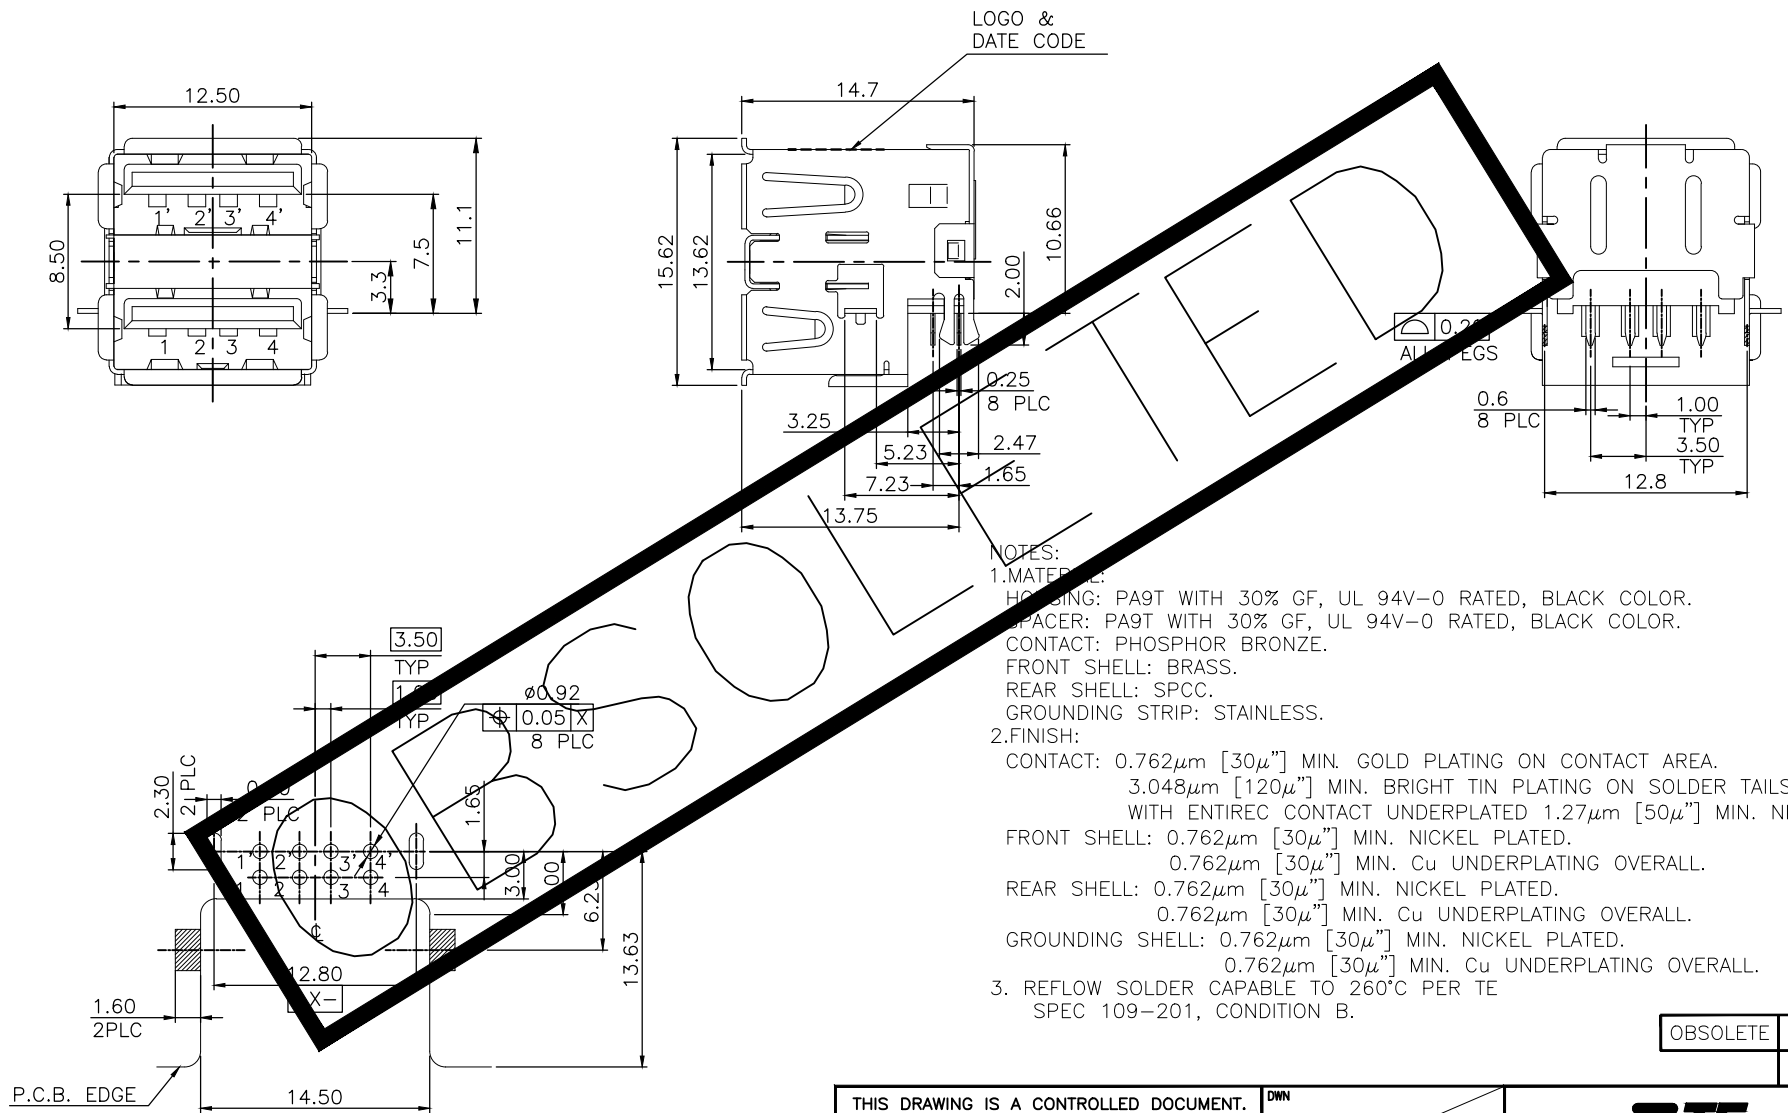

- NOTES:
- MATERIALS:
 HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 SPACER: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 CONTACT: PHOSPHOR BRONZE.
 FRONT SHELL: BRASS.
 REAR SHELL: SPCC.
 GROUNDING STRIP: STAINLESS.
 - FINISH:
 CONTACT: 0.762µm [30µ"] MIN. GOLD PLATING ON CONTACT AREA.
 3.048µm [120µ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS,
 WITH ENTIRE CONTACT UNDERPLATED 1.27µm [50µ"] MIN. NICKEL.
 FRONT SHELL: 0.762µm [30µ"] MIN. NICKEL PLATED.
 0.762µm [30µ"] MIN. Cu UNDERPLATING OVERALL.
 REAR SHELL: 0.762µm [30µ"] MIN. NICKEL PLATED.
 0.762µm [30µ"] MIN. Cu UNDERPLATING OVERALL.
 GROUNDING SHELL: 0.762µm [30µ"] MIN. NICKEL PLATED.
 0.762µm [30µ"] MIN. Cu UNDERPLATING OVERALL.
 - REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

OBSOLETE	TAPE & REEL	6-1734062-1
	PACKAGE	PART NUMBER

RECOMMEND P.C.B LAYOUT (THICKNESS 1.2mm)
 (COMPONENT SIDE) TOLERANCE ±0.05mm

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		TE Connectivity	
DIMENSIONS: MM		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD		NAME	
0 PLC ± 1 PLC ±0.35 2 PLC ±0.25 3 PLC ± 4 PLC ± ANGLES ± 3°		PRODUCT SPEC		USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE	
MATERIAL SEE NOTE		FINISH SEE NOTE		QUALIFICATION TEST REPORT	
		WEIGHT 4.71 GRAMS		SIZE	RESTRICTED TO
		CUSTOMER DRAWING		CAGE CODE A300779	DRAWING NO C-1734062
		SCALE		SHEET 9 of 24	REV G8

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT BY TYCO ELECTRONICS CORPORATION.


ALL RIGHTS RESERVED.

LOC
DW

DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

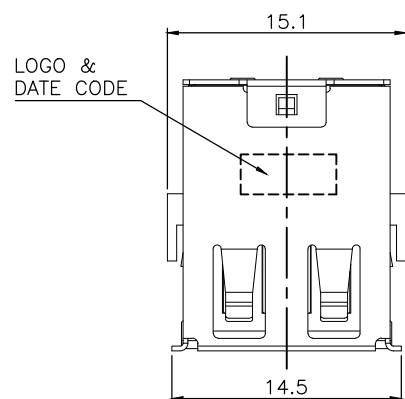


LOGO &
DATE CODE

15.1

14.5

NOTES:

- MATERIAL:
HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
FRONT SHIELD: BRASS.
REAR SHIELD: SPCC.
GROUNDING STRIP: BRASS.
- FINISH:
CONTACT: 0.762 μ m [30 μ "] MIN. GOLD PLATING ON CONTACT AREA.
3.048 μ m [120 μ "] MIN. BRIGHT TIN PLATING ON SOLDER TAILS.
WITH ENTIRE CONTACT UNDERPLATED 1.27 μ m [50 μ "] MIN. NICKEL.
FRONT SHELL: 0.762 μ m [30 μ "] MIN. NICKEL PLATED.
0.762 μ m [30 μ "] MIN. Cu UNDERPLATING OVERALL.
REAR SHELL: 0.762 μ m [30 μ "] MIN. NICKEL PLATED.
0.762 μ m [30 μ "] MIN. Cu UNDERPLATING OVERALL.
GROUNDING STRIP: 0.762 μ m [30 μ "] MIN. NICKEL PLATING.
0.762 μ m [30 μ "] MIN. Cu UNDERPLATING OVERALL.
- REFLOW SOLDER CAPABLE TO 250°C PER TE SPEC 109-201, CONDITION B.

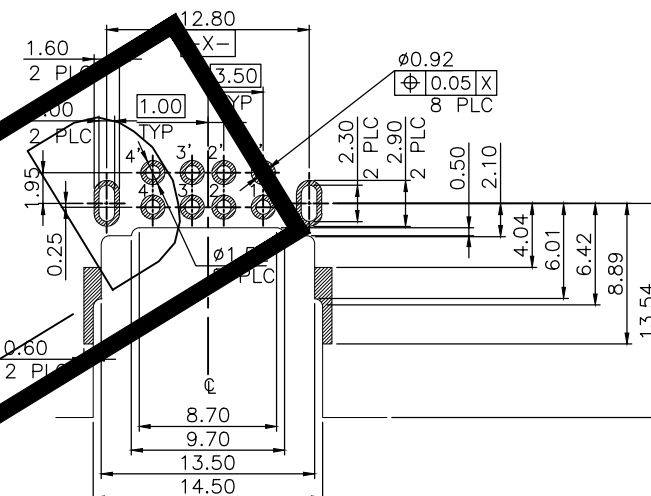

12.80

1.60

2 PLC

3.50

1.00

2 PLC

2 PLC

2 PLC

2.30

2 PLC

2.90

2 PLC

0.50

2.10

4.04

6.01

6.42

8.89

13.54

0.92

0.05 X

8 PLC

1.00

3'

2'

4'

0.25

1.95

0.60

2 PLC


8.70

9.70

13.50

14.50

RECOMMEND P.C.B LAYOUT (THICKNESS 1.2mm)
(COMPONENT SIDE) TOLERANCE ±0.05mm

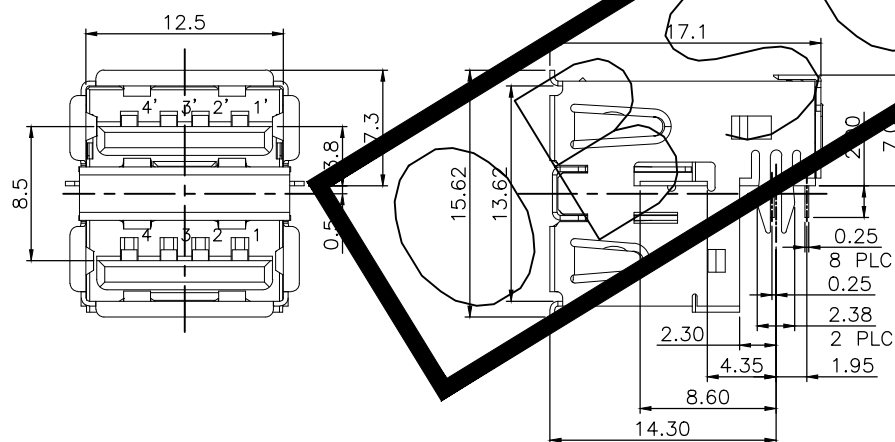

12.5

8.5

3.8

7.3

17.1

15.62

13.62

7.0

4.0

0.25

8 PLC

0.25

2.38


2.30

4.35

1.95

8.60

14.30

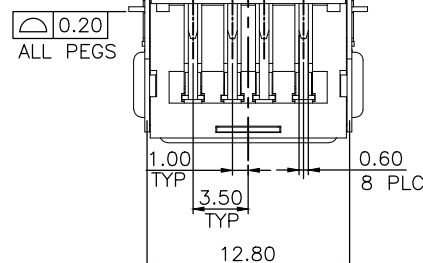

0.20

ALL PEGS

1.00

TYP

3.50

TYP

0.60

8 PLC

12.80

OBsolete	TAPE & REEL	7-1734062-1
	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		STE TE Connectivity	
DIMENSIONS: MM		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD		NAME	
0 PLC ± -		PRODUCT SPEC		USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE	
1 PLC ± 0.35		QUALIFICATION TEST REPORT		SIZE	
2 PLC ± 0.25				CAGE CODE	
3 PLC ± -				DRAWING NO	
4 PLC ± -				RESTRICTED TO	
ANGLES ± 3'		WEIGHT		A300779	
MATERIAL		4.3 GRAMS		C-1734062	
SEE NOTE		CUSTOMER DRAWING		SCALE	
				SHEET	
				10 of 24	
				REV G8	

AMP 1470-19 REV 31MAR2000

Downloaded From Oneyac.com

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC
DW

DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

15.10

LOGO & DATE CODE

14.5

12.80
-X-

3.50
TYP

1.00
TYP

1.00
TYP

1.95

0.25

0.60
2 PLC

PCB EDGE

12.50

13.50

14.50

1.00
2 PLC

2.30
2 PLC

2.04

2.54

4.04

5.85

6.72

8.89

13.54

Ø0.92
8 PLC

0.05 X

NOTE:

- MATERIAL:
HOUSING: PART WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
SPACER: PART WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
FRONT SHIELD: BRASS.
GROUNDING STRIP: BRASS.
- FINISH:
CONTACT: 0.762µm [30µ"] MIN. GOLD PLATING ON CONTACT AREA.
3.048µm [120µ"] MIN. BRIGHT TIN PLATING ON SOLDER TAIL,
WITH ENTIRE CONTACT UNDERPLATED 1.27µm [50µ"] MIN. NICKEL.
FRONT SHELL: 0.762µm [30µ"] MIN. NICKEL PLATED.
GROUNDING STRIP: 0.762µm [30µ"] MIN. Cu UNDERPLATING OVERALL.
GROUNDING STRIP: 0.762µm [30µ"] MIN. NICKEL PLATING.
GROUNDING STRIP: 0.762µm [30µ"] MIN. Cu UNDER PLATING OVERALL.
- REFLECT SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

RECOMMEND P.C.B LAYOUT (THICKNESS 1.2mm)
(COMPONENT SIDE) TOLERANCE ±0.05mm

12.50

8.50

1.3

1 2 3 4

17.0

8.40

2.00

15.62

13.62

0.25
8 PLC

2.30

4.35

8.60

14.30

1.95

0.25

2.50

0.20
ALL PEGS

1.00
TYP

3.50
TYP

0.6
8 PLC

12.8

OBSOLETE	TAPE & REEL	8-1734062-1
	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
MM			
		0 PLC	±
		1 PLC	± 0.35
		2 PLC	± 0.25
		3 PLC	±
		4 PLC	±
		ANGLES	± 3'
MATERIAL	FINISH	SEE NOTE	
SEE NOTE	SEE NOTE		









DWN	TE Connectivity		
CHK	NAME		
APVD	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE		
PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO
QUALIFICATION TEST REPORT	A3	00779	C-1734062
WEIGHT	4.3 GRAMS	RESTRICTED TO	
CUSTOMER DRAWING	SCALE	SHEET	REV
		11 of 24	G8

AMP 1470-19 REV 31MAR2000

Downloaded From Oneyac.com

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
DW		P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1.			

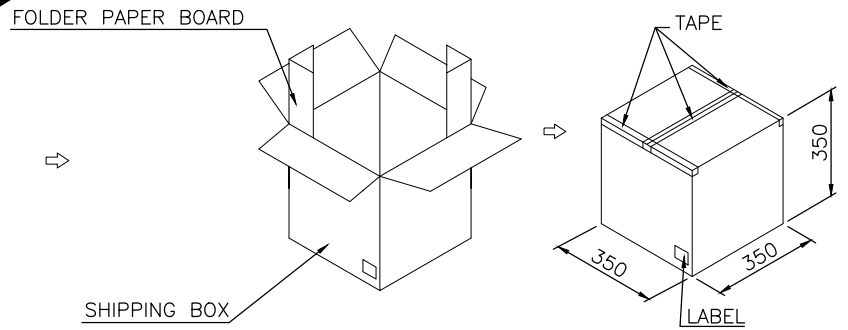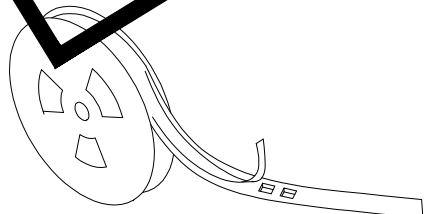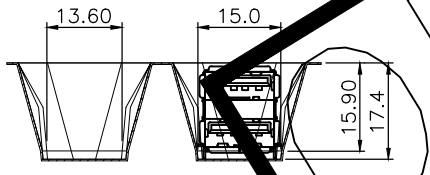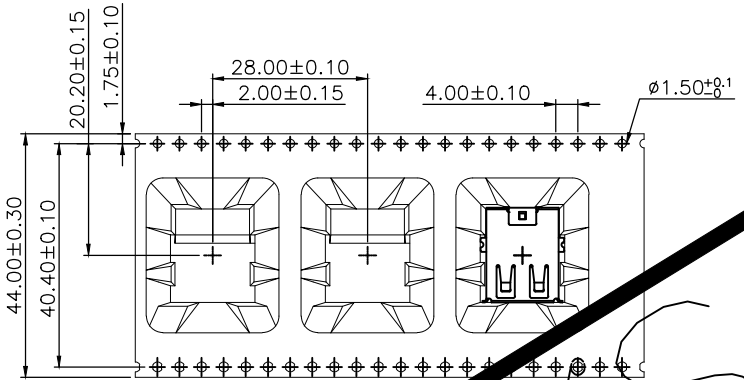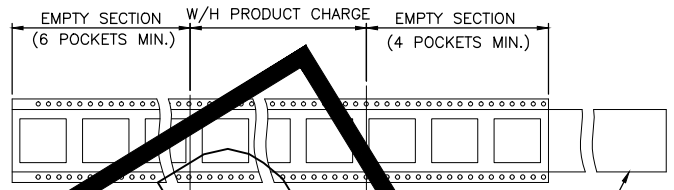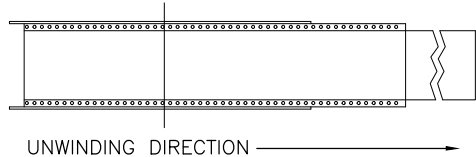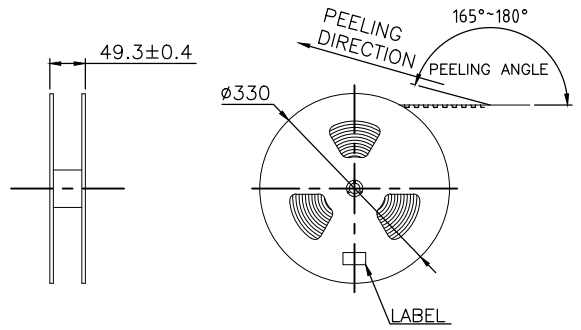


140	7	980	8.60	4.62	1-1734062-1
PCS/REEL	REELS/BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	1734062-1
					PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity			
DIMENSIONS: MM		CHK				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME			
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE			
MATERIAL		APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
FINISH		WEIGHT	A3	00779	C-1734062	
CUSTOMER DRAWING			SCALE	SHEET	12 of 24	REV G8

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC DW	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

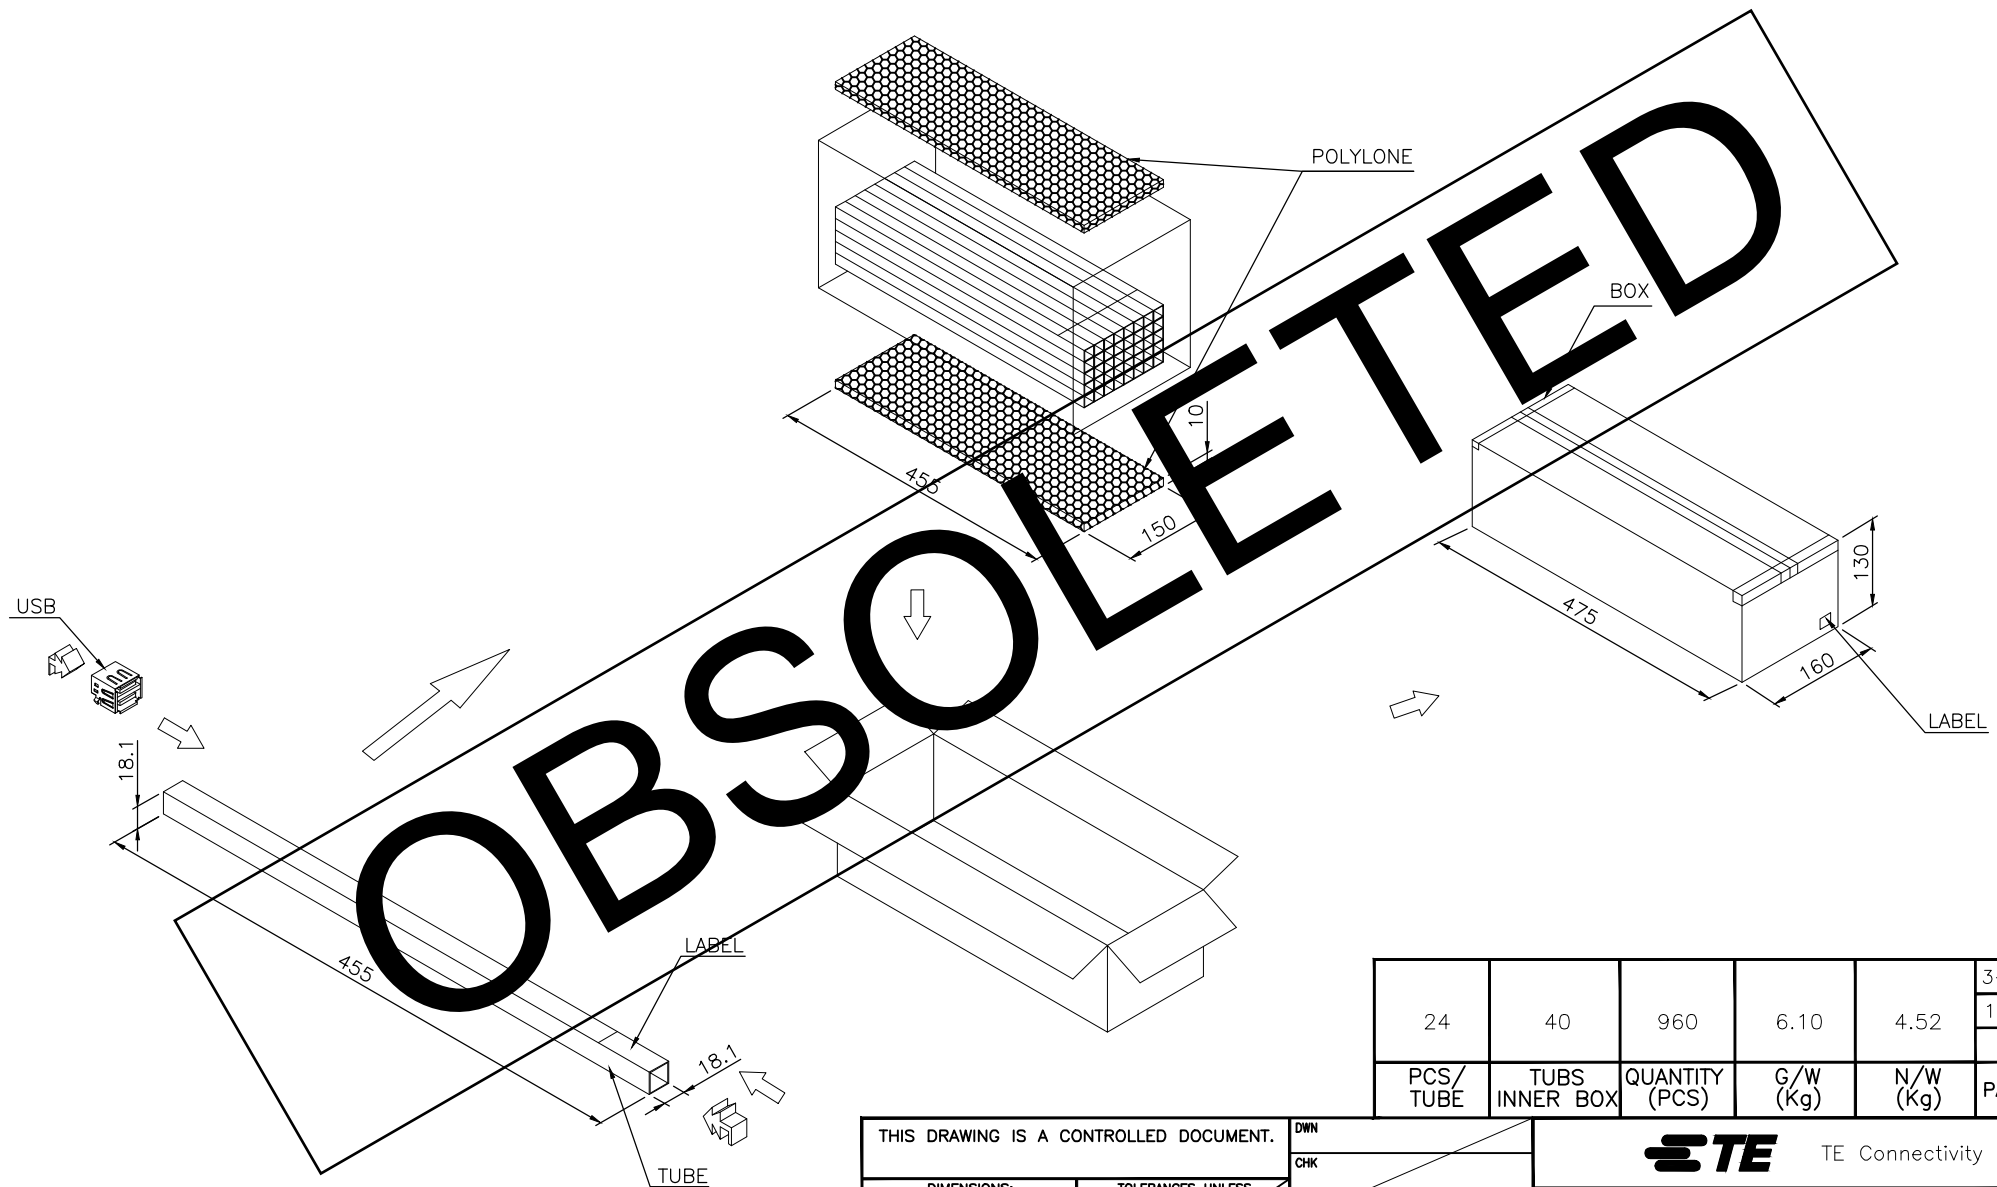

24	40	960	6.10	4.52	3-1734062-2 1-1734062-2 1734062-2
PCS/TUBE	TUBS INNER BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN	TE Connectivity		
0 PLC ± -	1 PLC ± -	CHK	NAME		
2 PLC ± -	3 PLC ± -	APVD	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE		
4 PLC ± -	ANGLES ± -	PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO
MATERIAL	FINISH	APPLICATION SPEC	A3	00779	C=1734062
		WEIGHT	CUSTOMER DRAWING		RESTRICTED TO
			SCALE	SHEET	REV
			-	13 of 24	G8

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION








© COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC DW

DIST

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

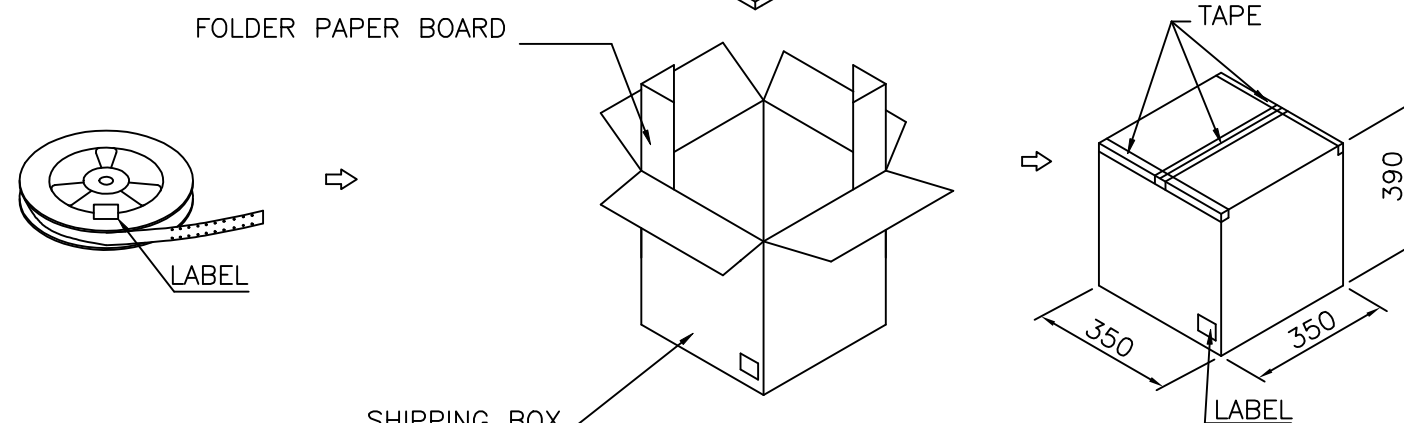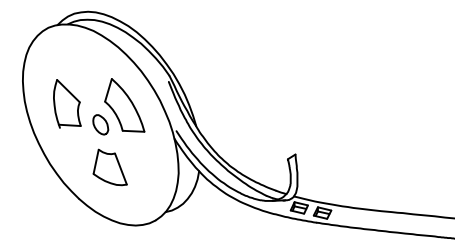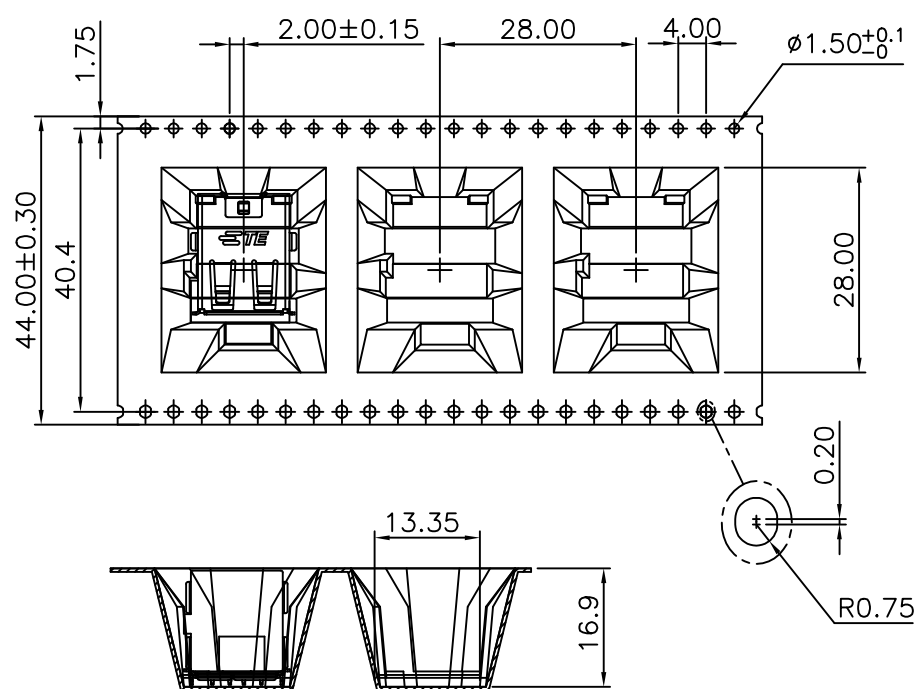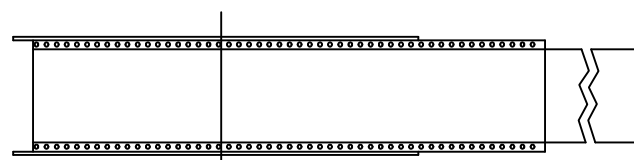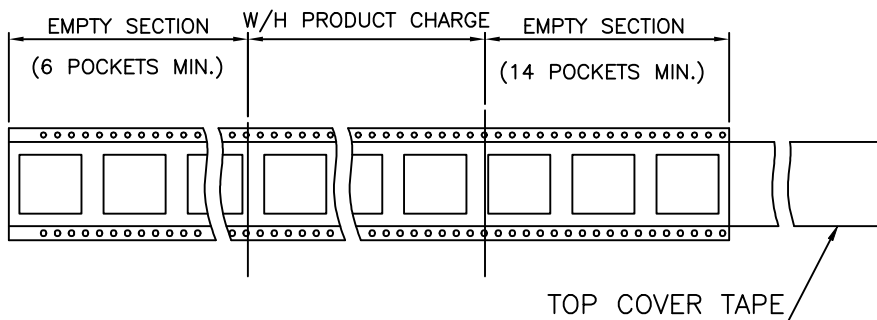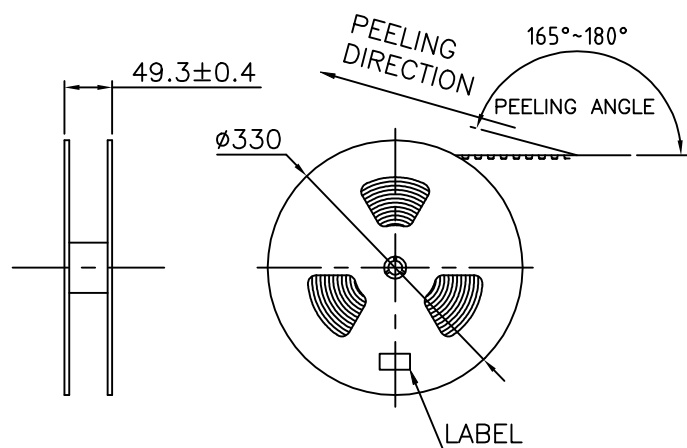

100	7	700	7.28	3.30	1734062-3
PCS/REEL	REELS/BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± -
4 PLC	± -
ANGLES	± -

MATERIAL

FINISH

DWN
CHK
APVD
PRODUCT SPEC
APPLICATION SPEC
WEIGHT
CUSTOMER DRAWING

TE TE Connectivity


NAME
USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	1734062	

SCALE	SHEET	REV
	14 of 24	G8

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC DW	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

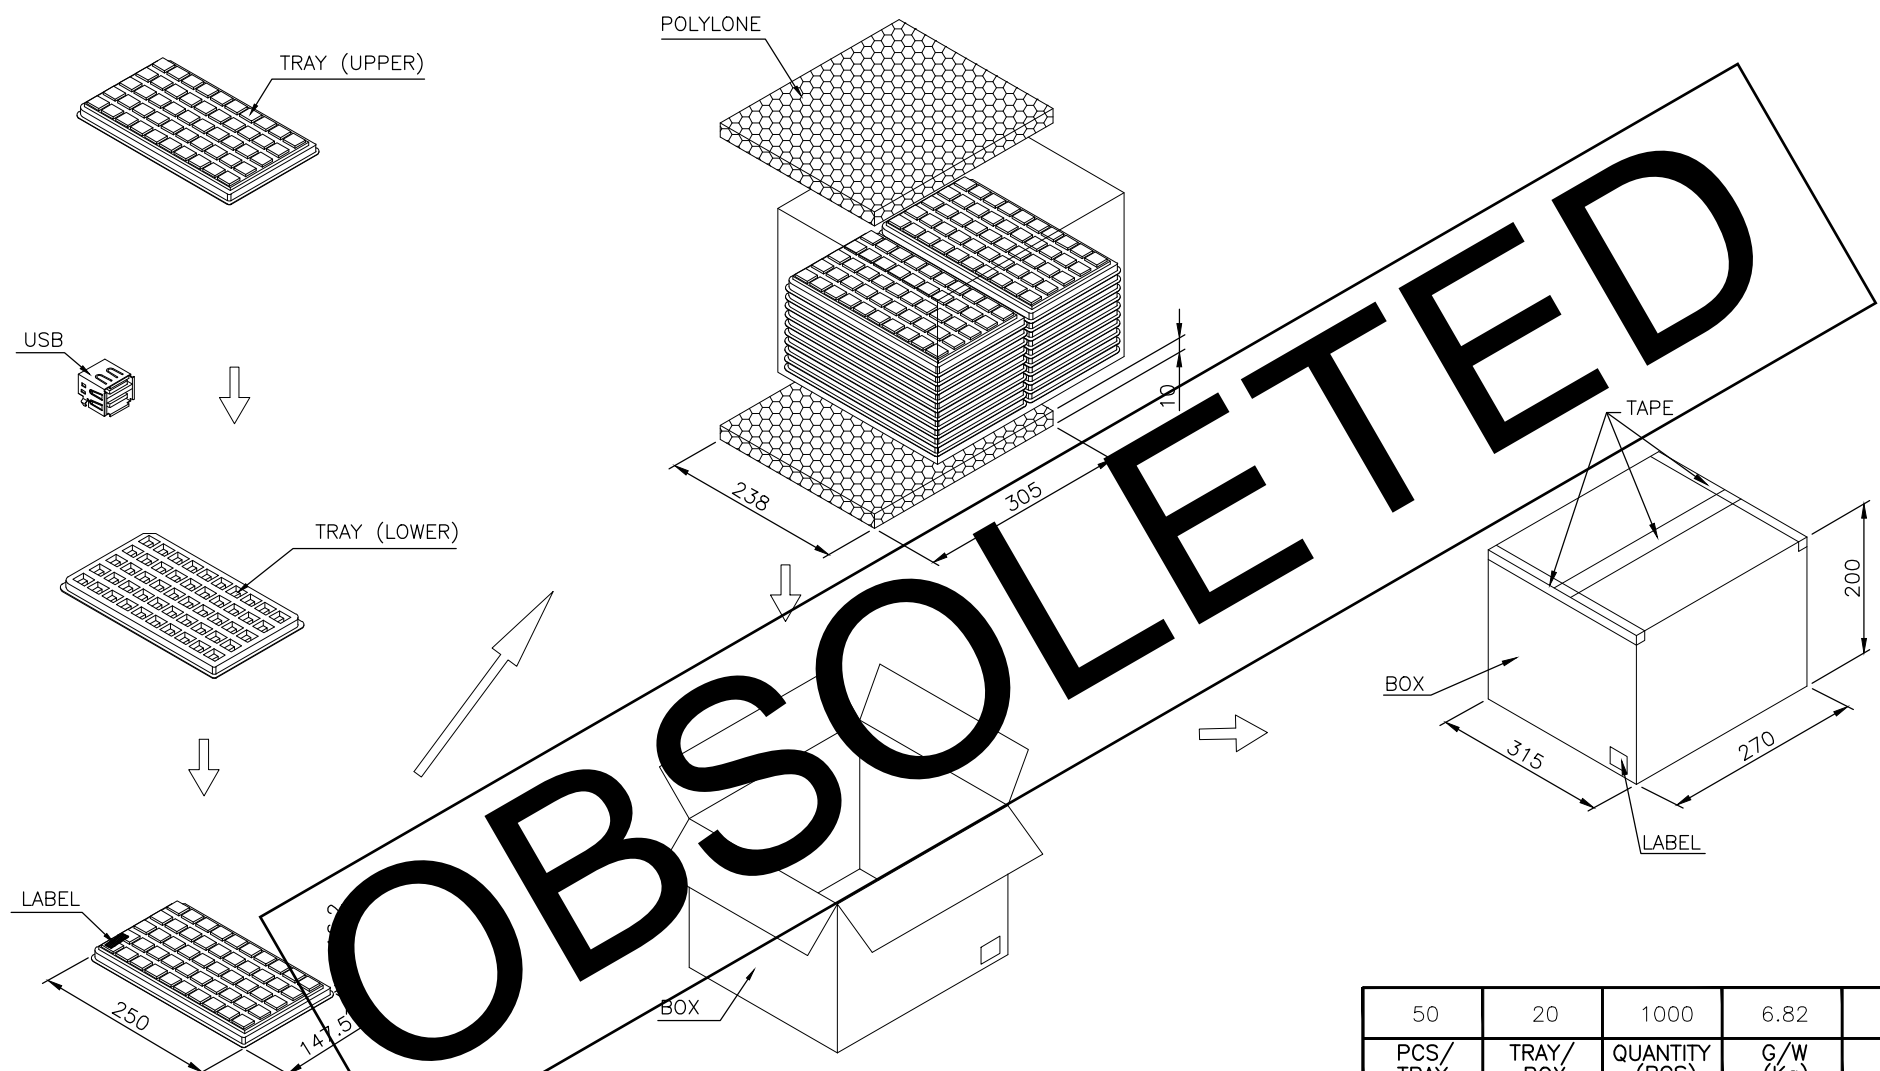



OBSOLETE

50	20	1000	6.82	4.71	2-1734062-2
PCS/ TRAY	TRAY/ BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		TE Connectivity	
DIMENSIONS: MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:			
		0 PLC	±	NAME USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE	
		1 PLC	±		
		2 PLC	±		
		3 PLC	±		
		4 PLC	±		
MATERIAL		FINISH		SIZE	CAGE CODE
				A3	00779
				DRAWING NO	
				C-1734062	
				RESTRICTED TO	
CUSTOMER DRAWING				SCALE	SHEET
					15 of 24
				REV	G8

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC DW	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

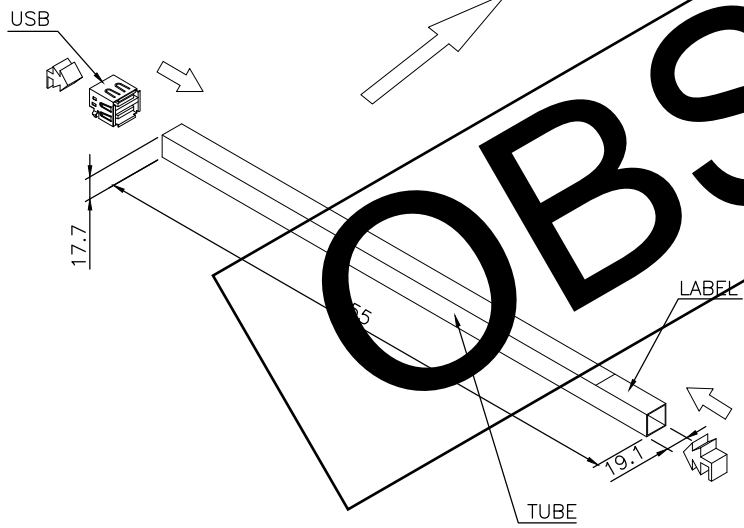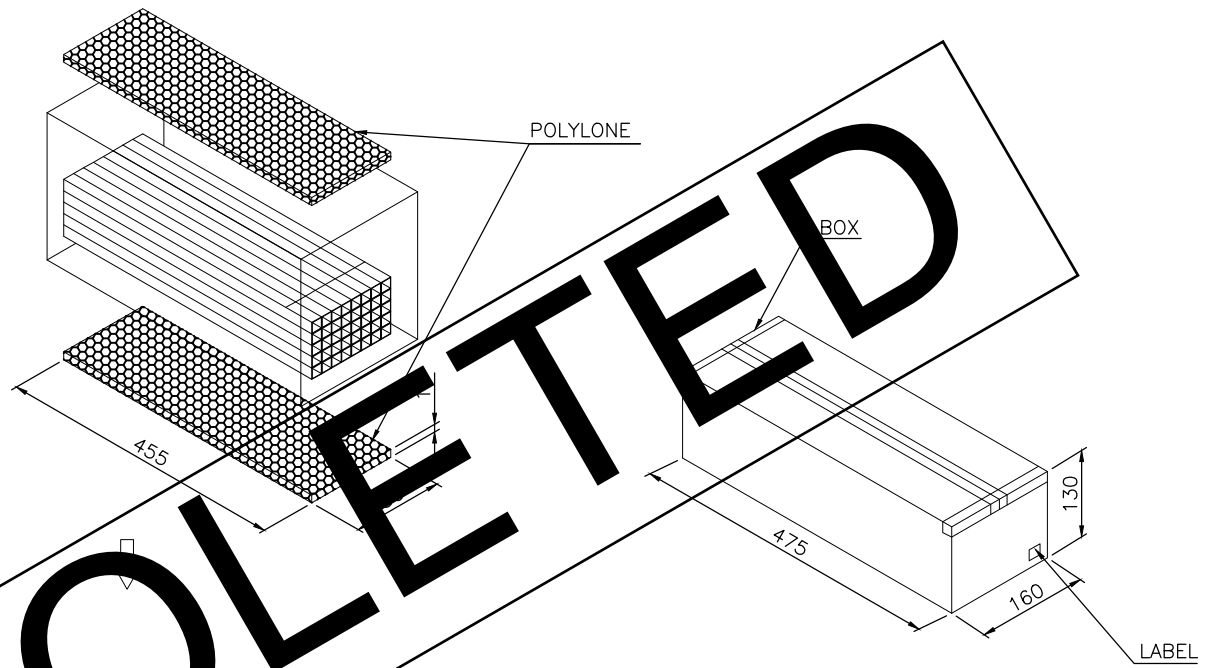

OBSOLETE

25	40	1000	6.27	4.71	4-1734062-1	OBSOLETE
PCS/TUBE	TUBS INNER BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER	
					2-1734062-1	







THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN		CHK		APVD		NAME	
0 PLC ± .	1 PLC ± .	TE Connectivity		TE Connectivity		TE Connectivity		USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE	
2 PLC ± .	3 PLC ± .	PRODUCT SPEC		APPLICATION SPEC		SIZE		CAGE CODE	
4 PLC ± .	ANGLES ± .	WEIGHT		A300779		DRAWING NO		RESTRICTED TO	
MATERIAL	FINISH	CUSTOMER DRAWING		SCALE		SHEET		REV	




AMP 1470-19 REV 31MAR2000

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
DW	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1.			

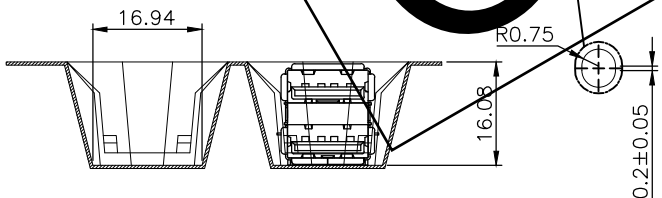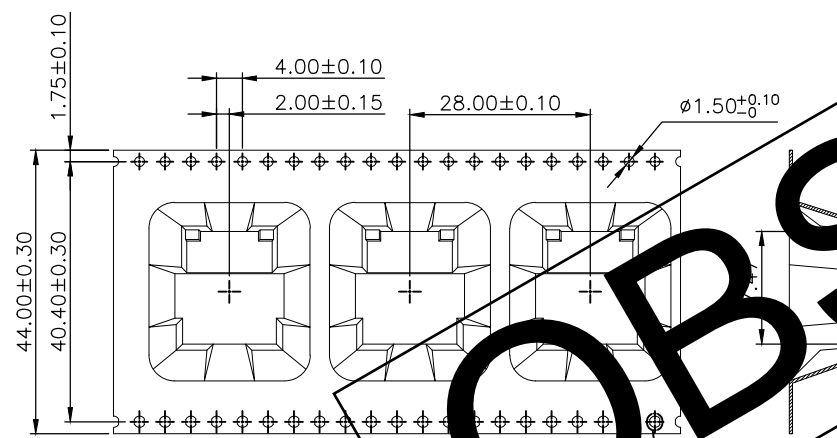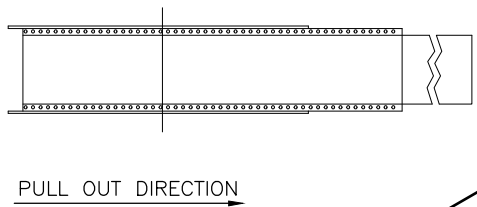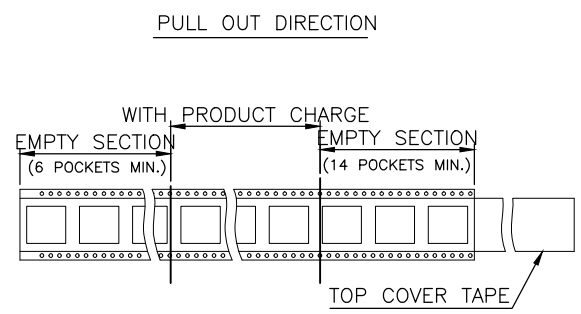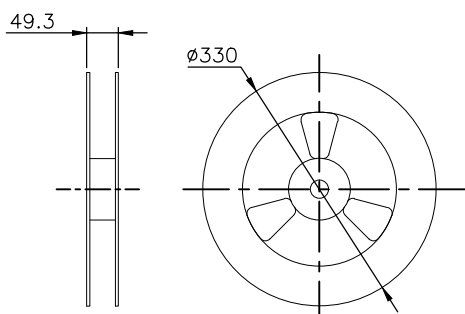

OBSOLETE

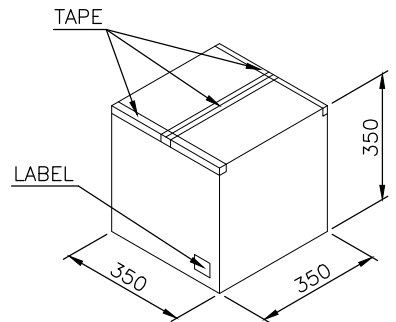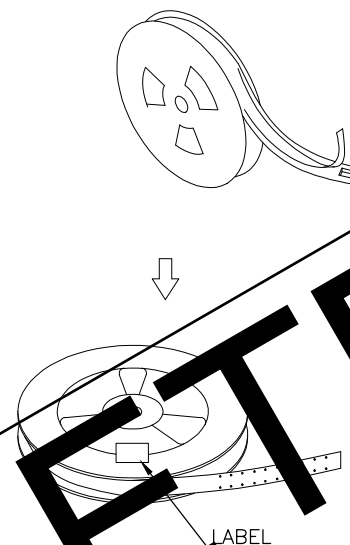


SHIPPING BOX
7 REELS / SHIPPING BOX

120	7	840	9.05	3.96	3-1734062-4
					3-1734062-3
PCS/REEL	REELS/BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	STE TE Connectivity		
DIMENSIONS: MM		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME		
0 PLC	± -	PRODUCT SPEC	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE		
1 PLC	± -	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO
2 PLC	± -	WEIGHT	A3	00779	C-1734062
3 PLC	± -		RESTRICTED TO		
4 PLC	± -				
ANGLES	± -				
MATERIAL	FINISH		CUSTOMER DRAWING		
		SCALE	SHEET	17 of 24	REV G8

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC DW	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			


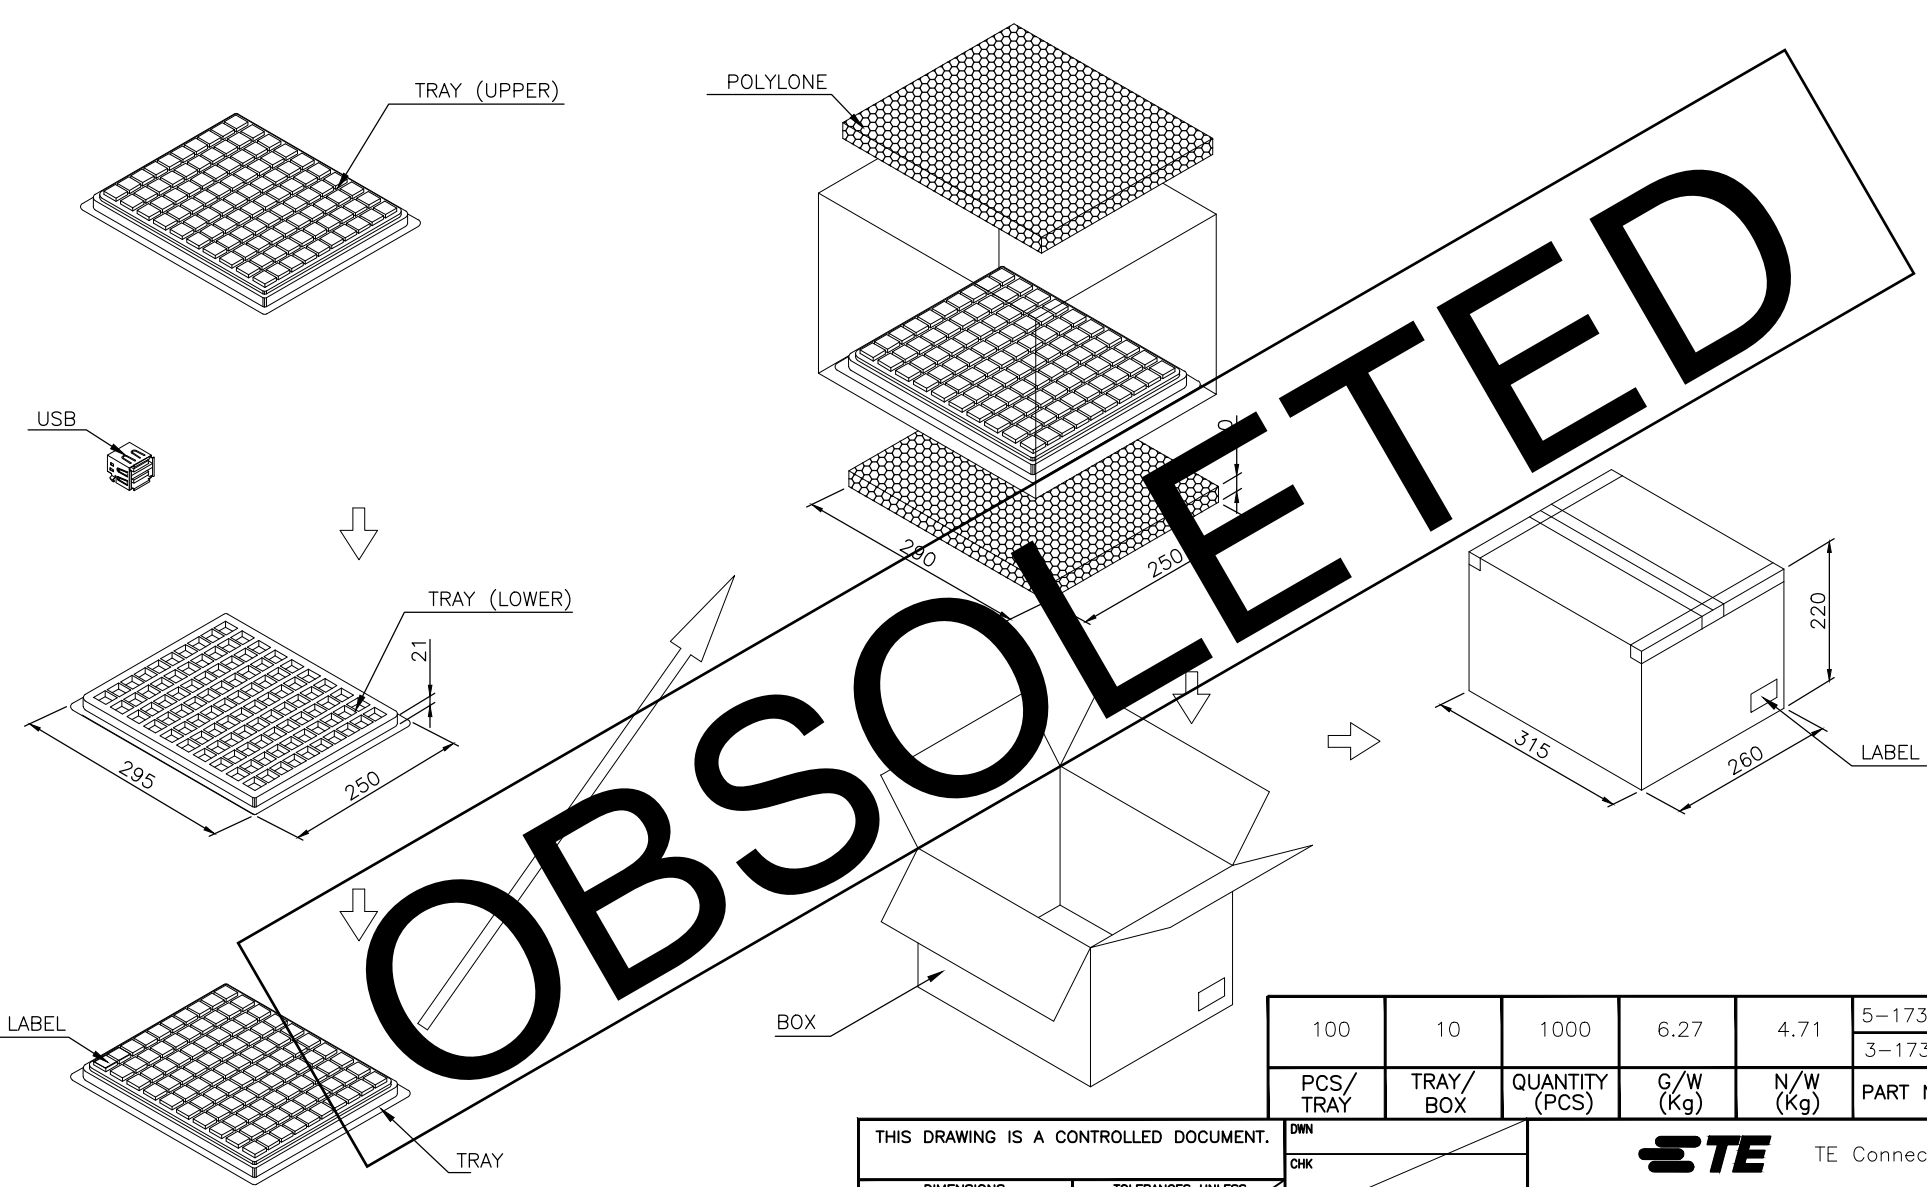


100	10	1000	6.27	4.71	5-1734062-2	OBSOLETE
PCS/TRAY	TRAY/BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	3-1734062-1	
					PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		TE Connectivity	
DIMENSIONS: MM		CHK			
		APVD		NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - MATERIAL FINISH		PRODUCT SPEC		USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE	
		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO	
		WEIGHT		A3 00779 C-1734062	
		CUSTOMER DRAWING		RESTRICTED TO	
		SCALE		SHEET 18 of 24 REV G8	





THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC DW	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

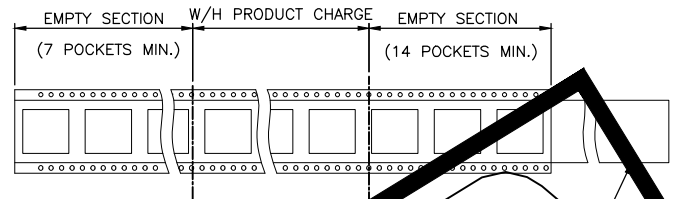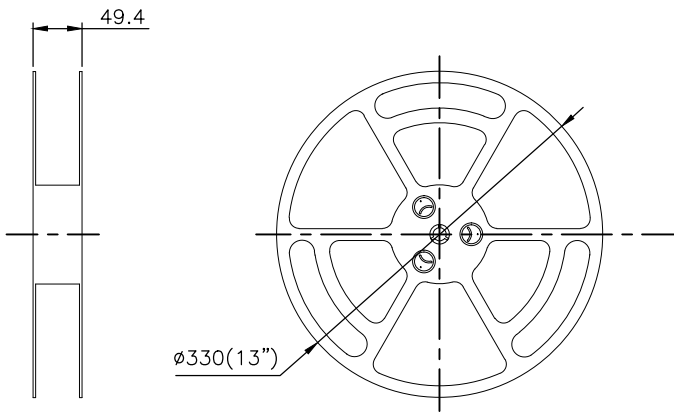

PULL OUT DIRECTION →

TOP COVER TAPE

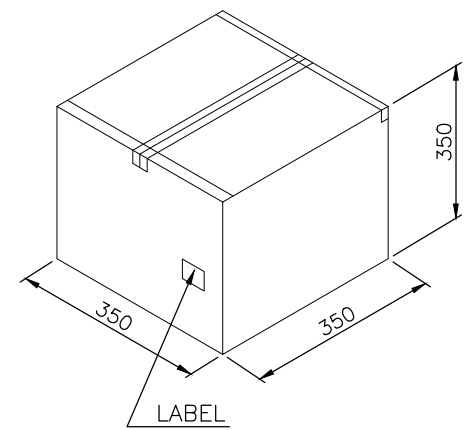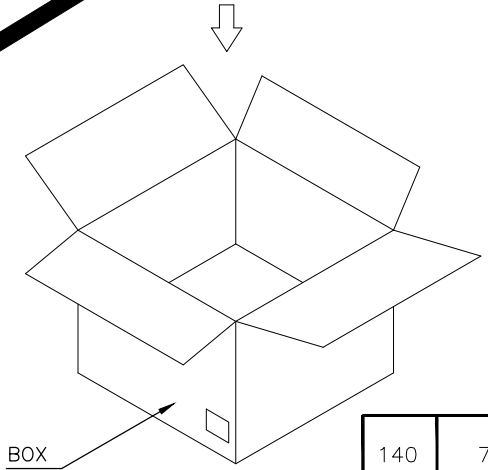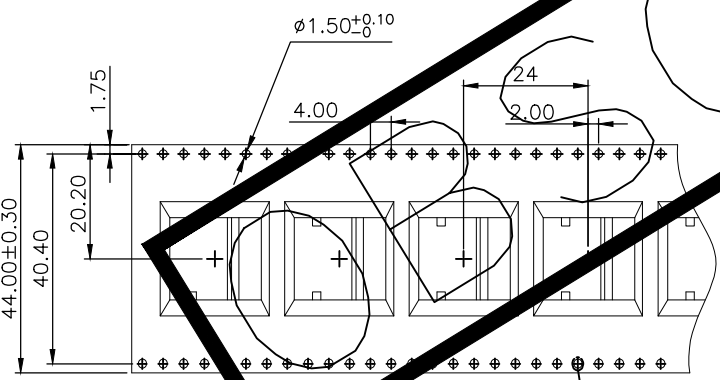

140	7	980	8.60	4.62	5-1734062-1	OBSOLETE
PCS/REEL	REELS/BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER	






THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
	0 PLC	±	-
	1 PLC	±	-
	2 PLC	±	-
	3 PLC	±	-
	4 PLC	±	-
	ANGLES	±	-
MATERIAL	FINISH		




DWN		CHK		APVD		NAME	
PRODUCT SPEC		APPLICATION SPEC		WEIGHT		RESTRICTED TO	
STE TE Connectivity		USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE		SIZE	CAGE CODE	DRAWING NO	
CUSTOMER DRAWING		SCALE		SHEET		REV	
A300779		C-1734062		19 of 24		G8	

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC DW	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

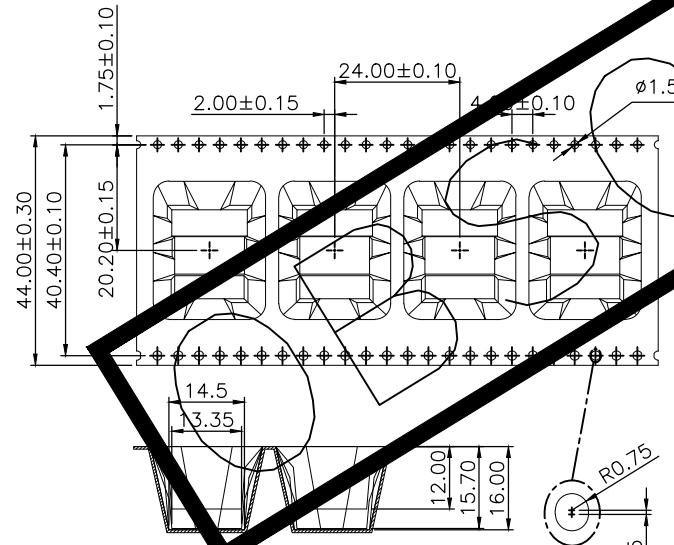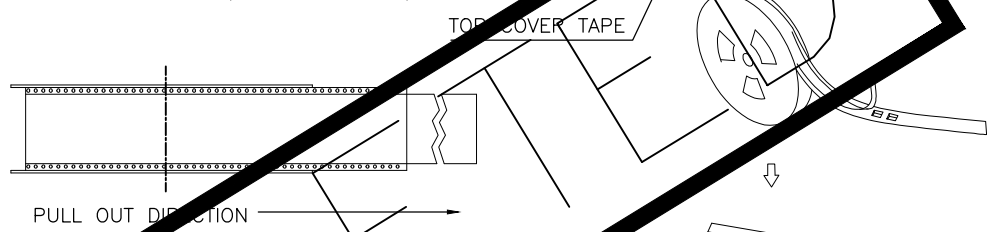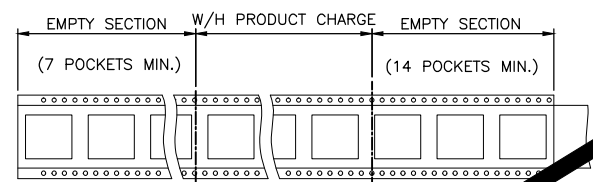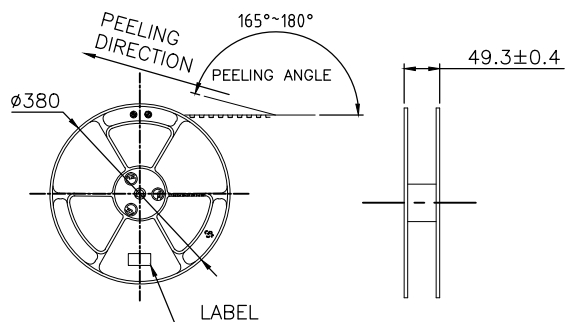

FOLDER PAPER BOARD






11.20 Kg	6.10 Kg	200	7	1400 PCS	4-1734062-2	OBSOLETE
GROSS WEIGHT	NET WEIGHT	PCS/REEL	REELS/CARTON	QUANTITY	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.


DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	TE Connectivity			
MM	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH	NAME USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE			
MATERIAL		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		A3	00779	C-1734062	
CUSTOMER DRAWING				SCALE	SHEET 20 of 24
				REV	G8

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC DW	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

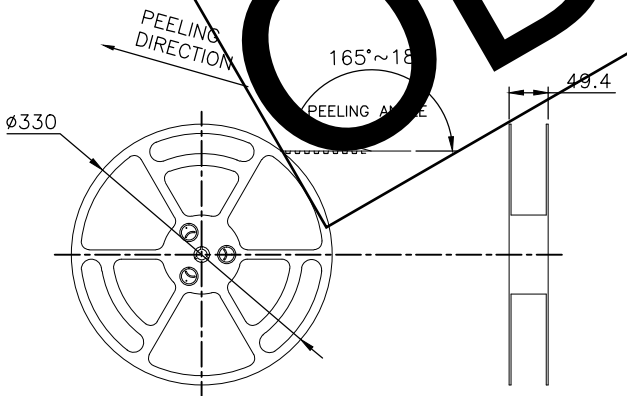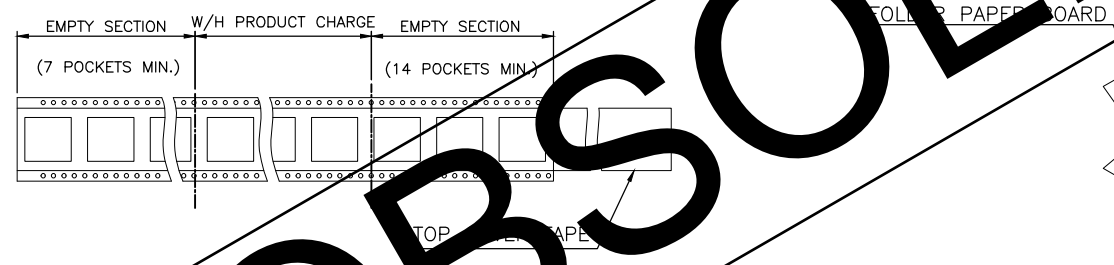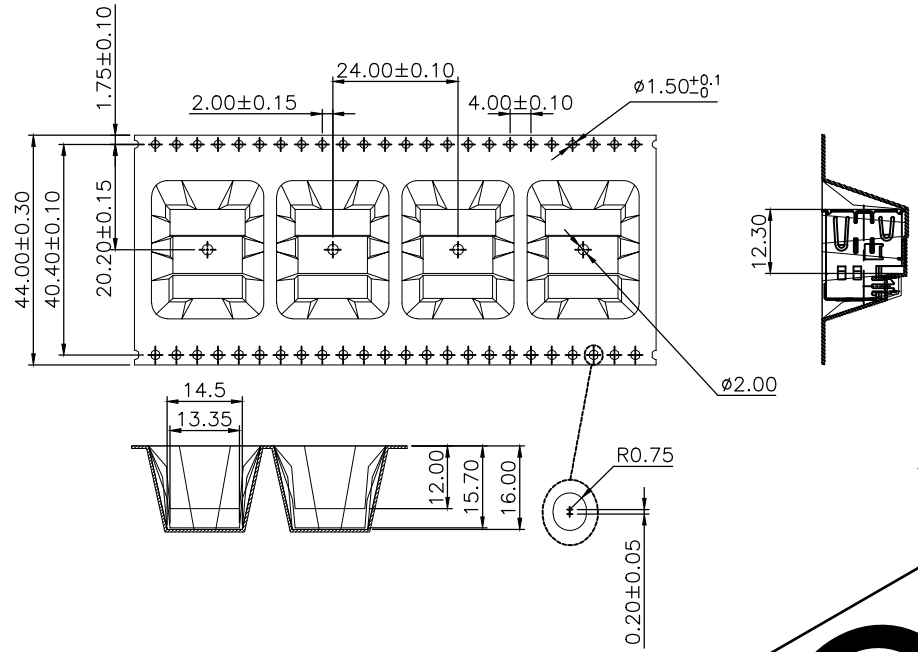

OBSOLETE

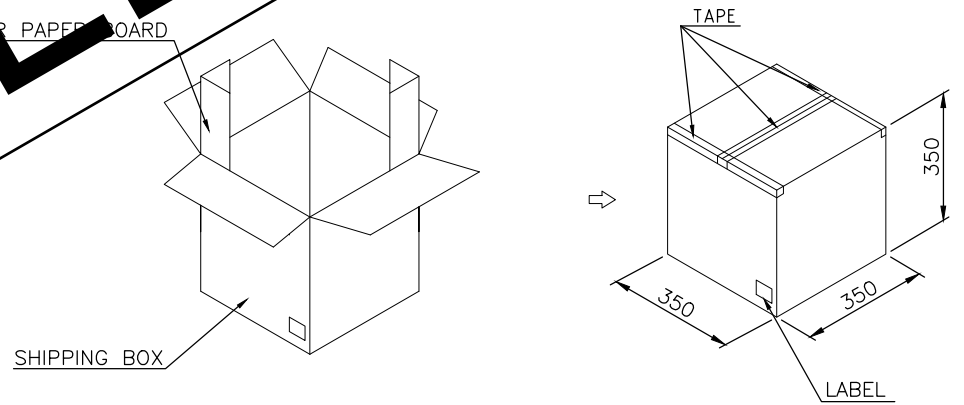


7.01 Kg	2.98 Kg	100	7	700 PCS	4-1734062-3
GROSS WEIGHT	NET WEIGHT	PCS/REEL	REELS/CARTON	QUANTITY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity		
DIMENSIONS: MM		CHK	NAME		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE		
0 PLC	± -	PRODUCT SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO		
1 PLC	± -	APPLICATION SPEC	A3	00779	C-1734062
2 PLC	± -	WEIGHT	CUSTOMER DRAWING SCALE SHEET 21 of 24 REV G8		
3 PLC	± -				
4 PLC	± -				
ANGLES	± -				
FINISH					

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC DW	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			







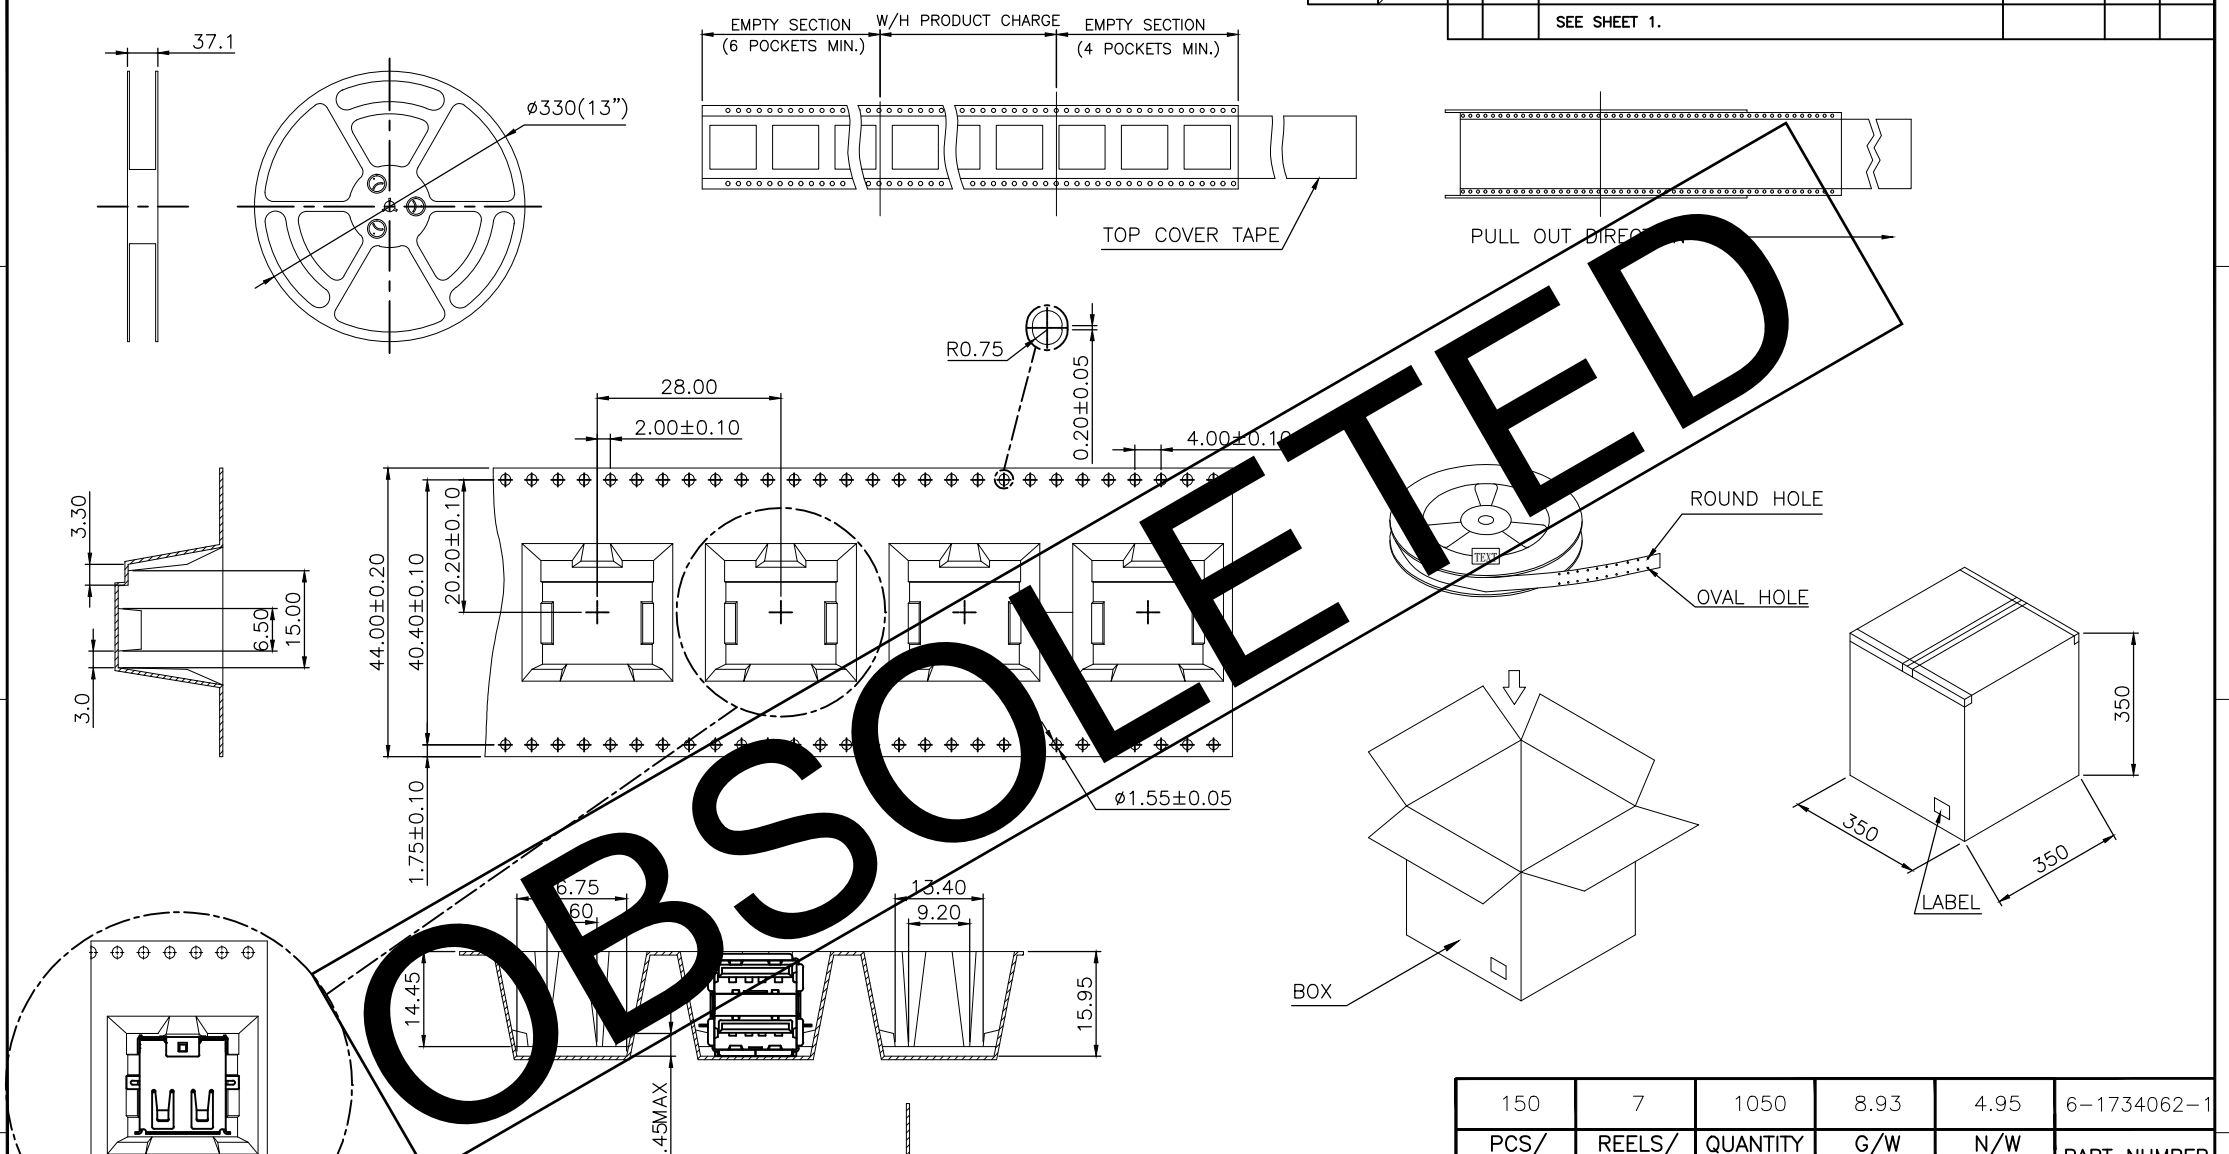


150	7	1050	8.93	4.95	6-1734062-1
PCS/REEL	REELS/BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity			
DIMENSIONS: MM		CHK				
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - MATERIAL FINISH		APVD	NAME			
		PRODUCT SPEC	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE			
		APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		WEIGHT	A3	00779	C-1734062	
CUSTOMER DRAWING			SCALE	SHEET	22 of 24	REV G8

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC DW	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

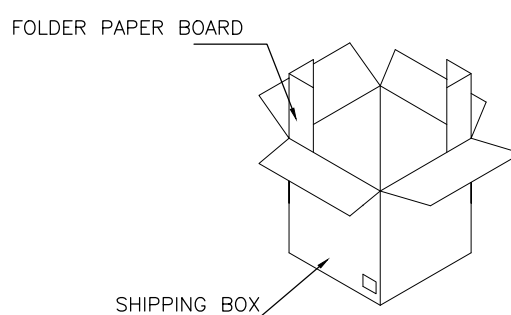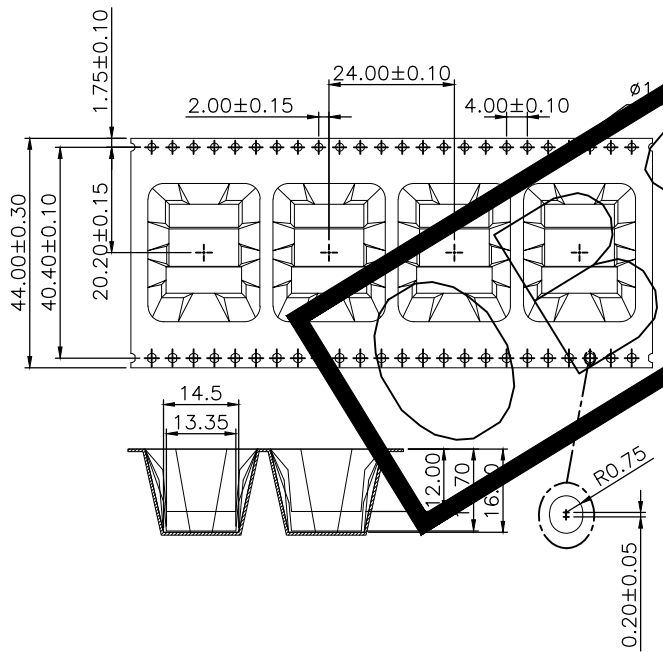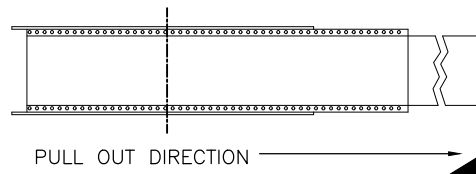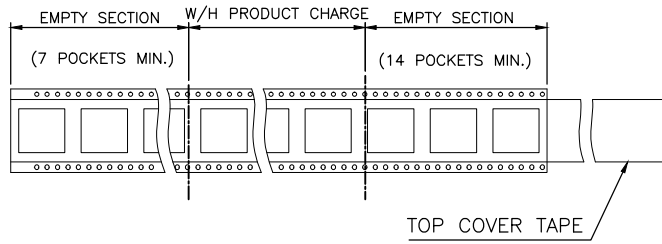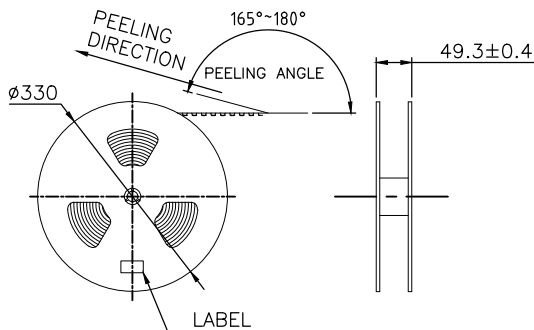





130	7	910	7.94	3.91	7-1734062-1	OBSOLETE
PCS/REEL	REELS/BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.







DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN		TE Connectivity	
	0 PLC ± -	CHK	NAME		
	1 PLC ± -	APVD	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE		
	2 PLC ± -	PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO
	3 PLC ± -	APPLICATION SPEC	A3	00779	C-1734062
	4 PLC ± -	WEIGHT	CUSTOMER DRAWING		RESTRICTED TO
MATERIAL	FINISH	SCALE		SHEET	REV
				23 of 24	G8

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC DW	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

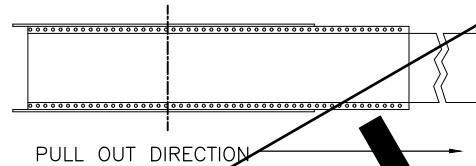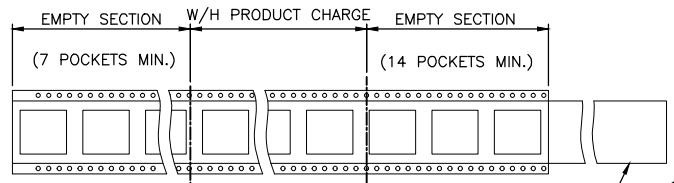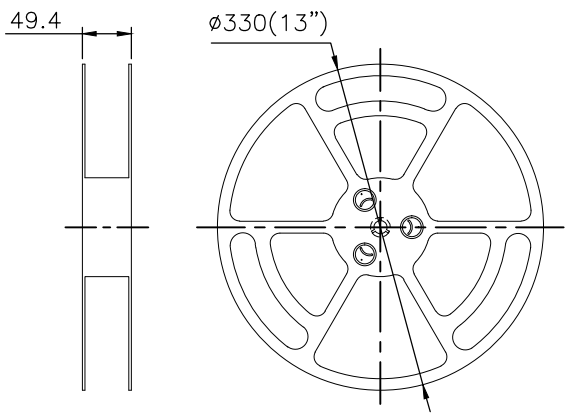

OBSOLETE

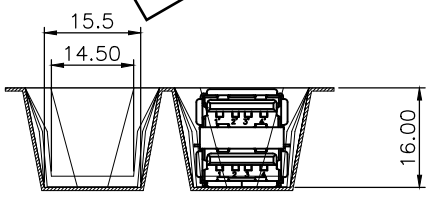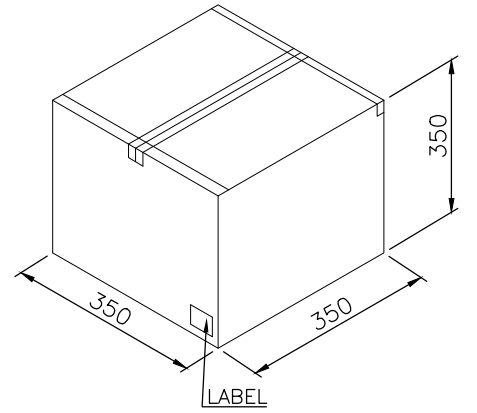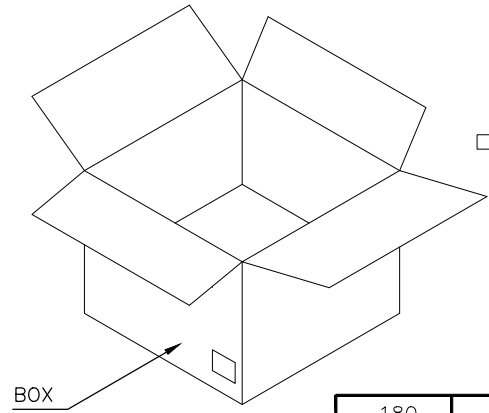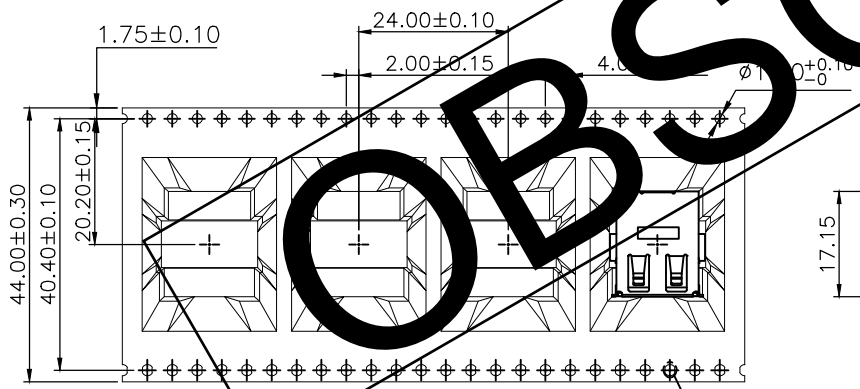

180	7	1260	9.40	5.42	8-1734062-1
PCS/REEL	REELS/BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	STE TE Connectivity		
DIMENSIONS: MM		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME		
0 PLC	±	PRODUCT SPEC	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE		
1 PLC	±	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO
2 PLC	±	WEIGHT	A3	00779	C-1734062
3 PLC	±	CUSTOMER DRAWING			
4 PLC	±	SCALE	SHEET	REV	RESTRICTED TO
ANGLES	±	-	24 of 24	G8	-
FINISH	-				

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)