


THIS DRAWING IS UNPUBLISHED.
 RELEASED FOR PUBLICATION
 ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C3	REVISED PER ECO-11-004917	11MAR11	RK	HMR
	C4	REVISED PER ECO-17-008806	19FEB2018	RS	DR

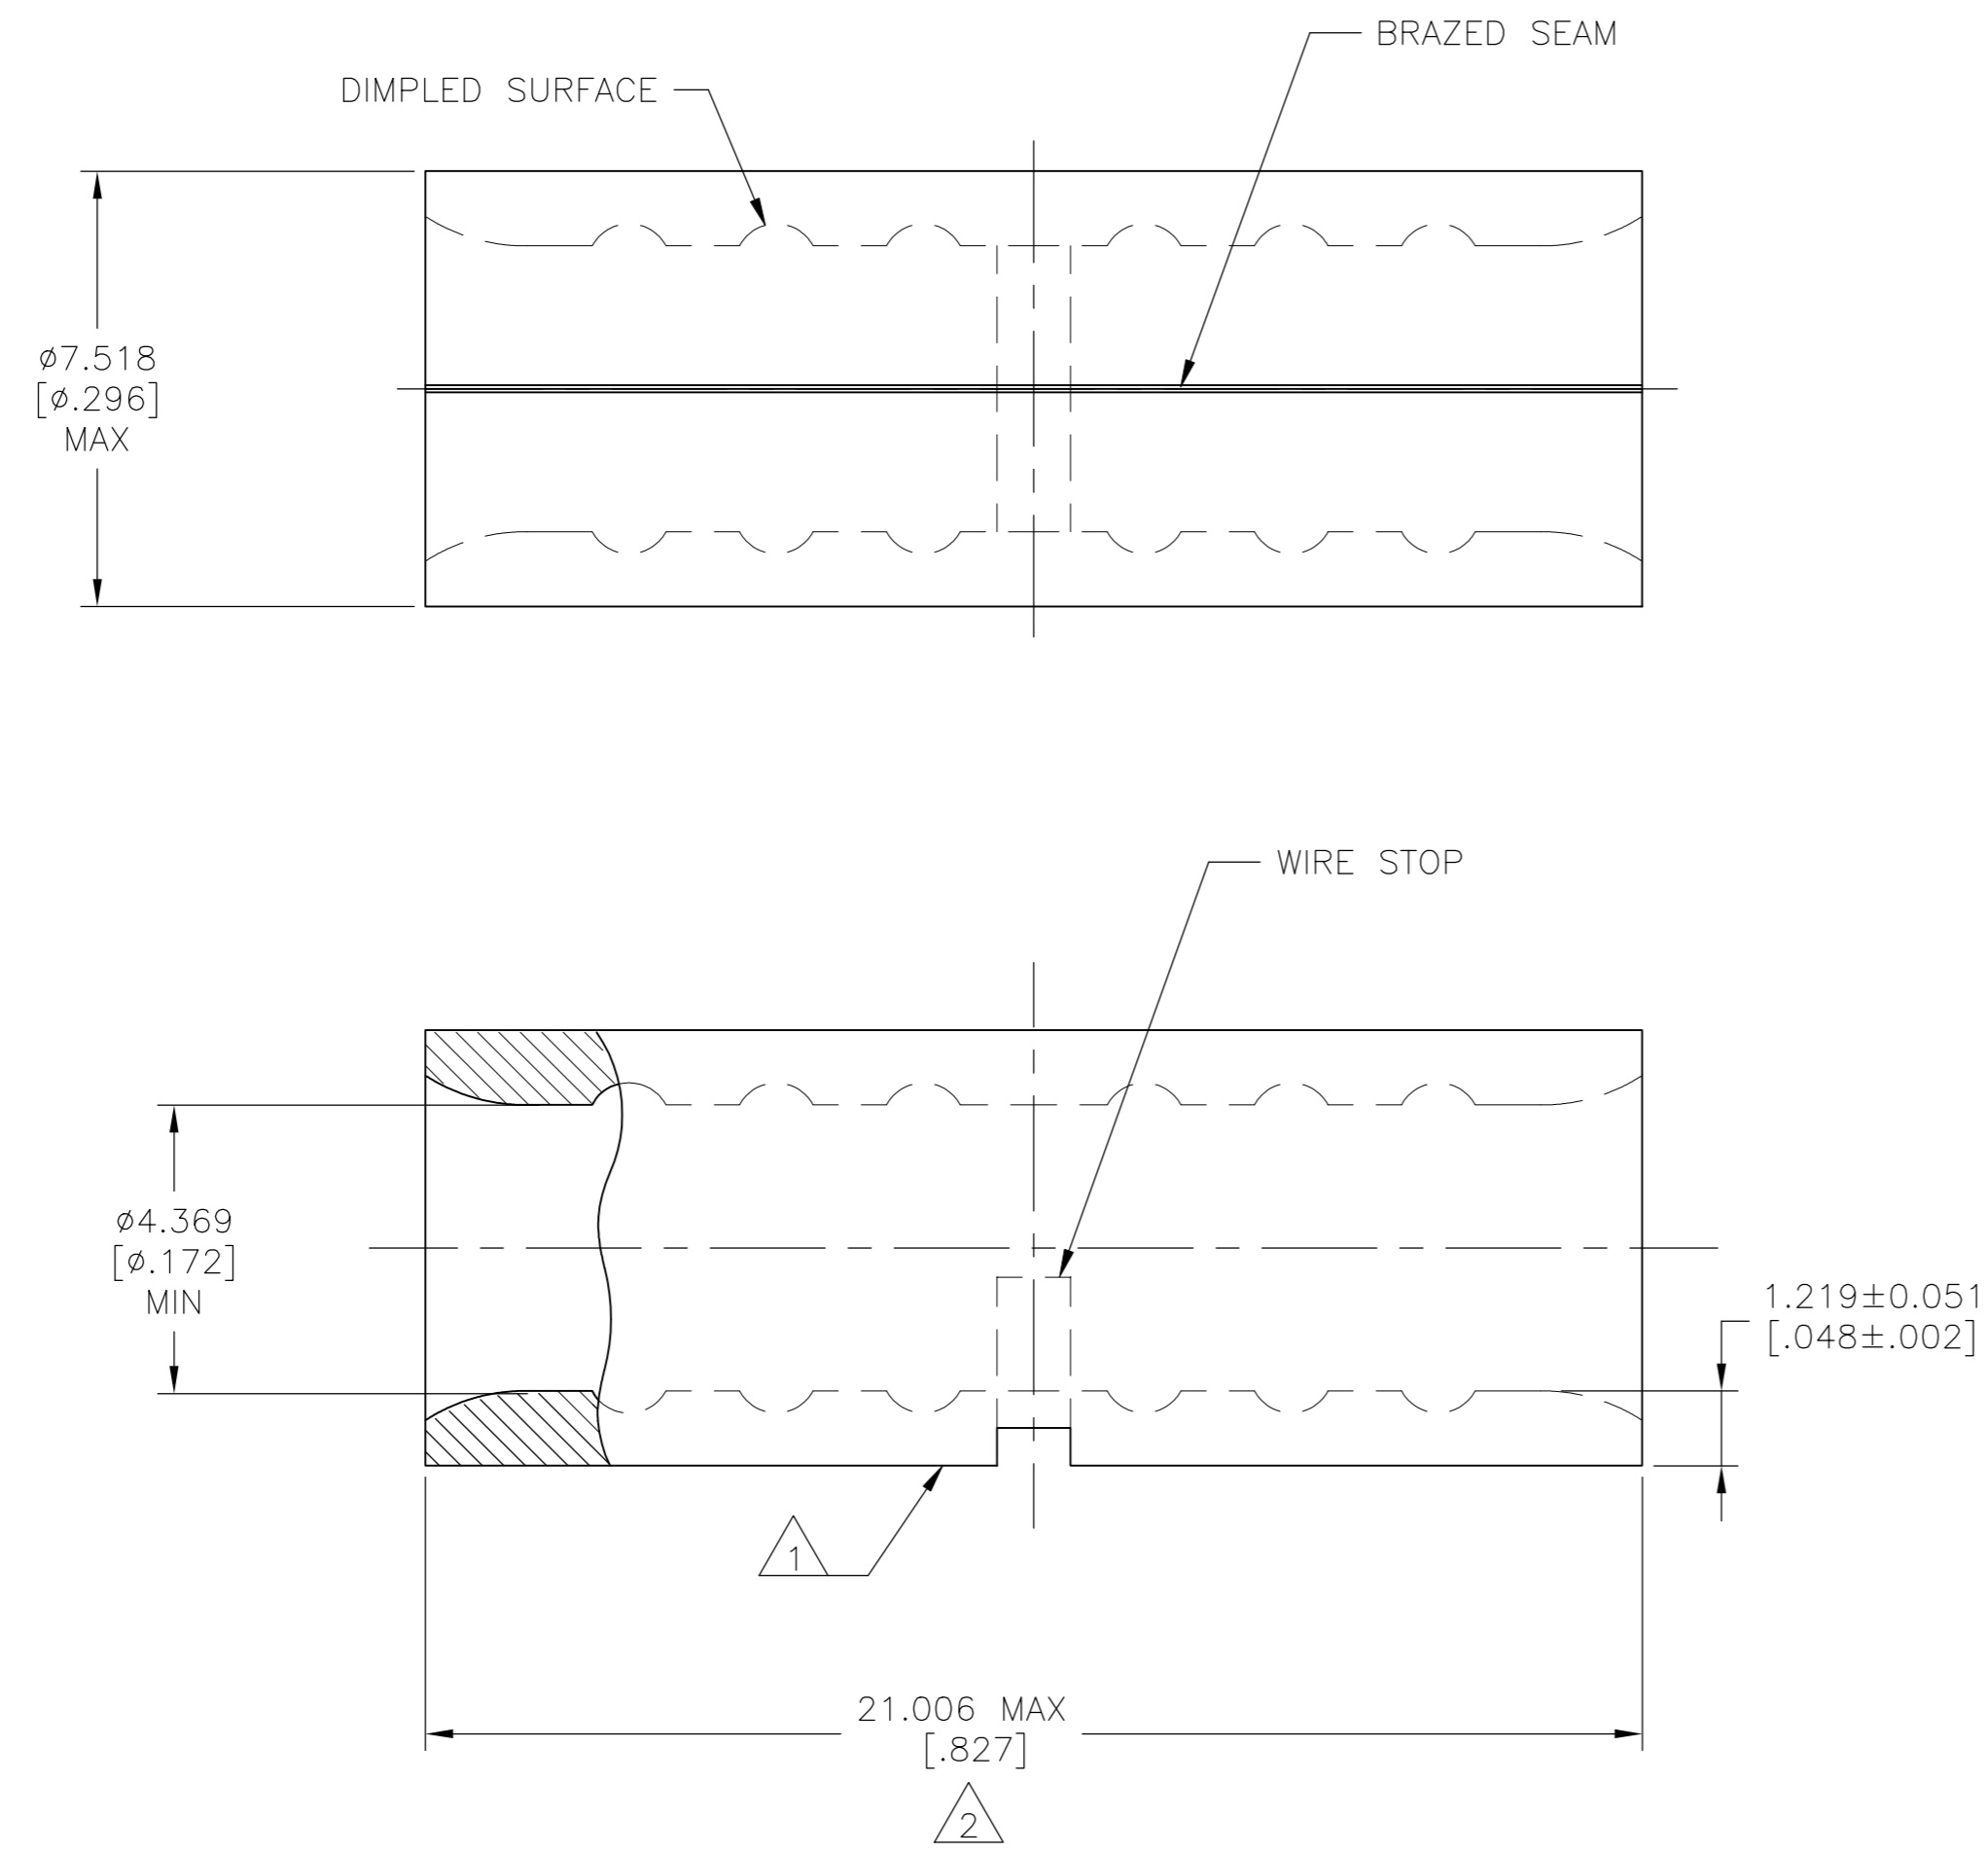

AMP WIRE RANGE	Listed FILE E13288	LR7189 Certified
8 AWG SOLID OR STRANDED	8 AWG STRANDED	8 AWG SOLID OR STRANDED

- 1 STAMP AMP 8W* APPROX AS SHOWN
- 2 MAXIMUM LENGTH DOES NOT INCLUDE MANUFACTURING TABS
- 3 COPPER PER ASTM B-152, ANNEALED
- 4 .000100 MIN TIN PLATE PER ASTM B-545
- 5 NOTE DELETED

AMP INCORPORATED		MAX RECOMMENDED OPERATING TEMPERATURE: 170°C [338°F] MAX
CUSTOMER SERVICE SYSTEMS		
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: N/A
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 6.64-10.5mm² [13,100-20,800] SOLID OR STRANDED
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: JR RUTH 19JAN07
DIMENSIONS: mm [INCHES]		CHK: M SPICER 19JAN07
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: M SPICER 19JAN07
0 PLC ± -	1 PLC ± -	PRODUCT SPEC
2 PLC ± -	3 PLC ± 0.127[.005]	APPLICATION SPEC
4 PLC ± -	ANGLES ± -	
MATERIAL	FINISH	NAME
- 3	- 4	UL 486 A-B
CUSTOMER DRAWING		SIZE: A2

25	LOOSE PIECE, BOX	8-34321-3
100	LOOSE PIECE	34321
QTY	PACKAGING TYPE	PART NO.
STE TE Connectivity Ltd.		
SPLICE, BUTT, STANDARD, SOLISTRAND 8 AWG		
SCALE: 8:1	SHEET: 1 of 1	REV: C4

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)