


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
K		REVISED PER ECO-20-002238	7-22-20	CT	PD

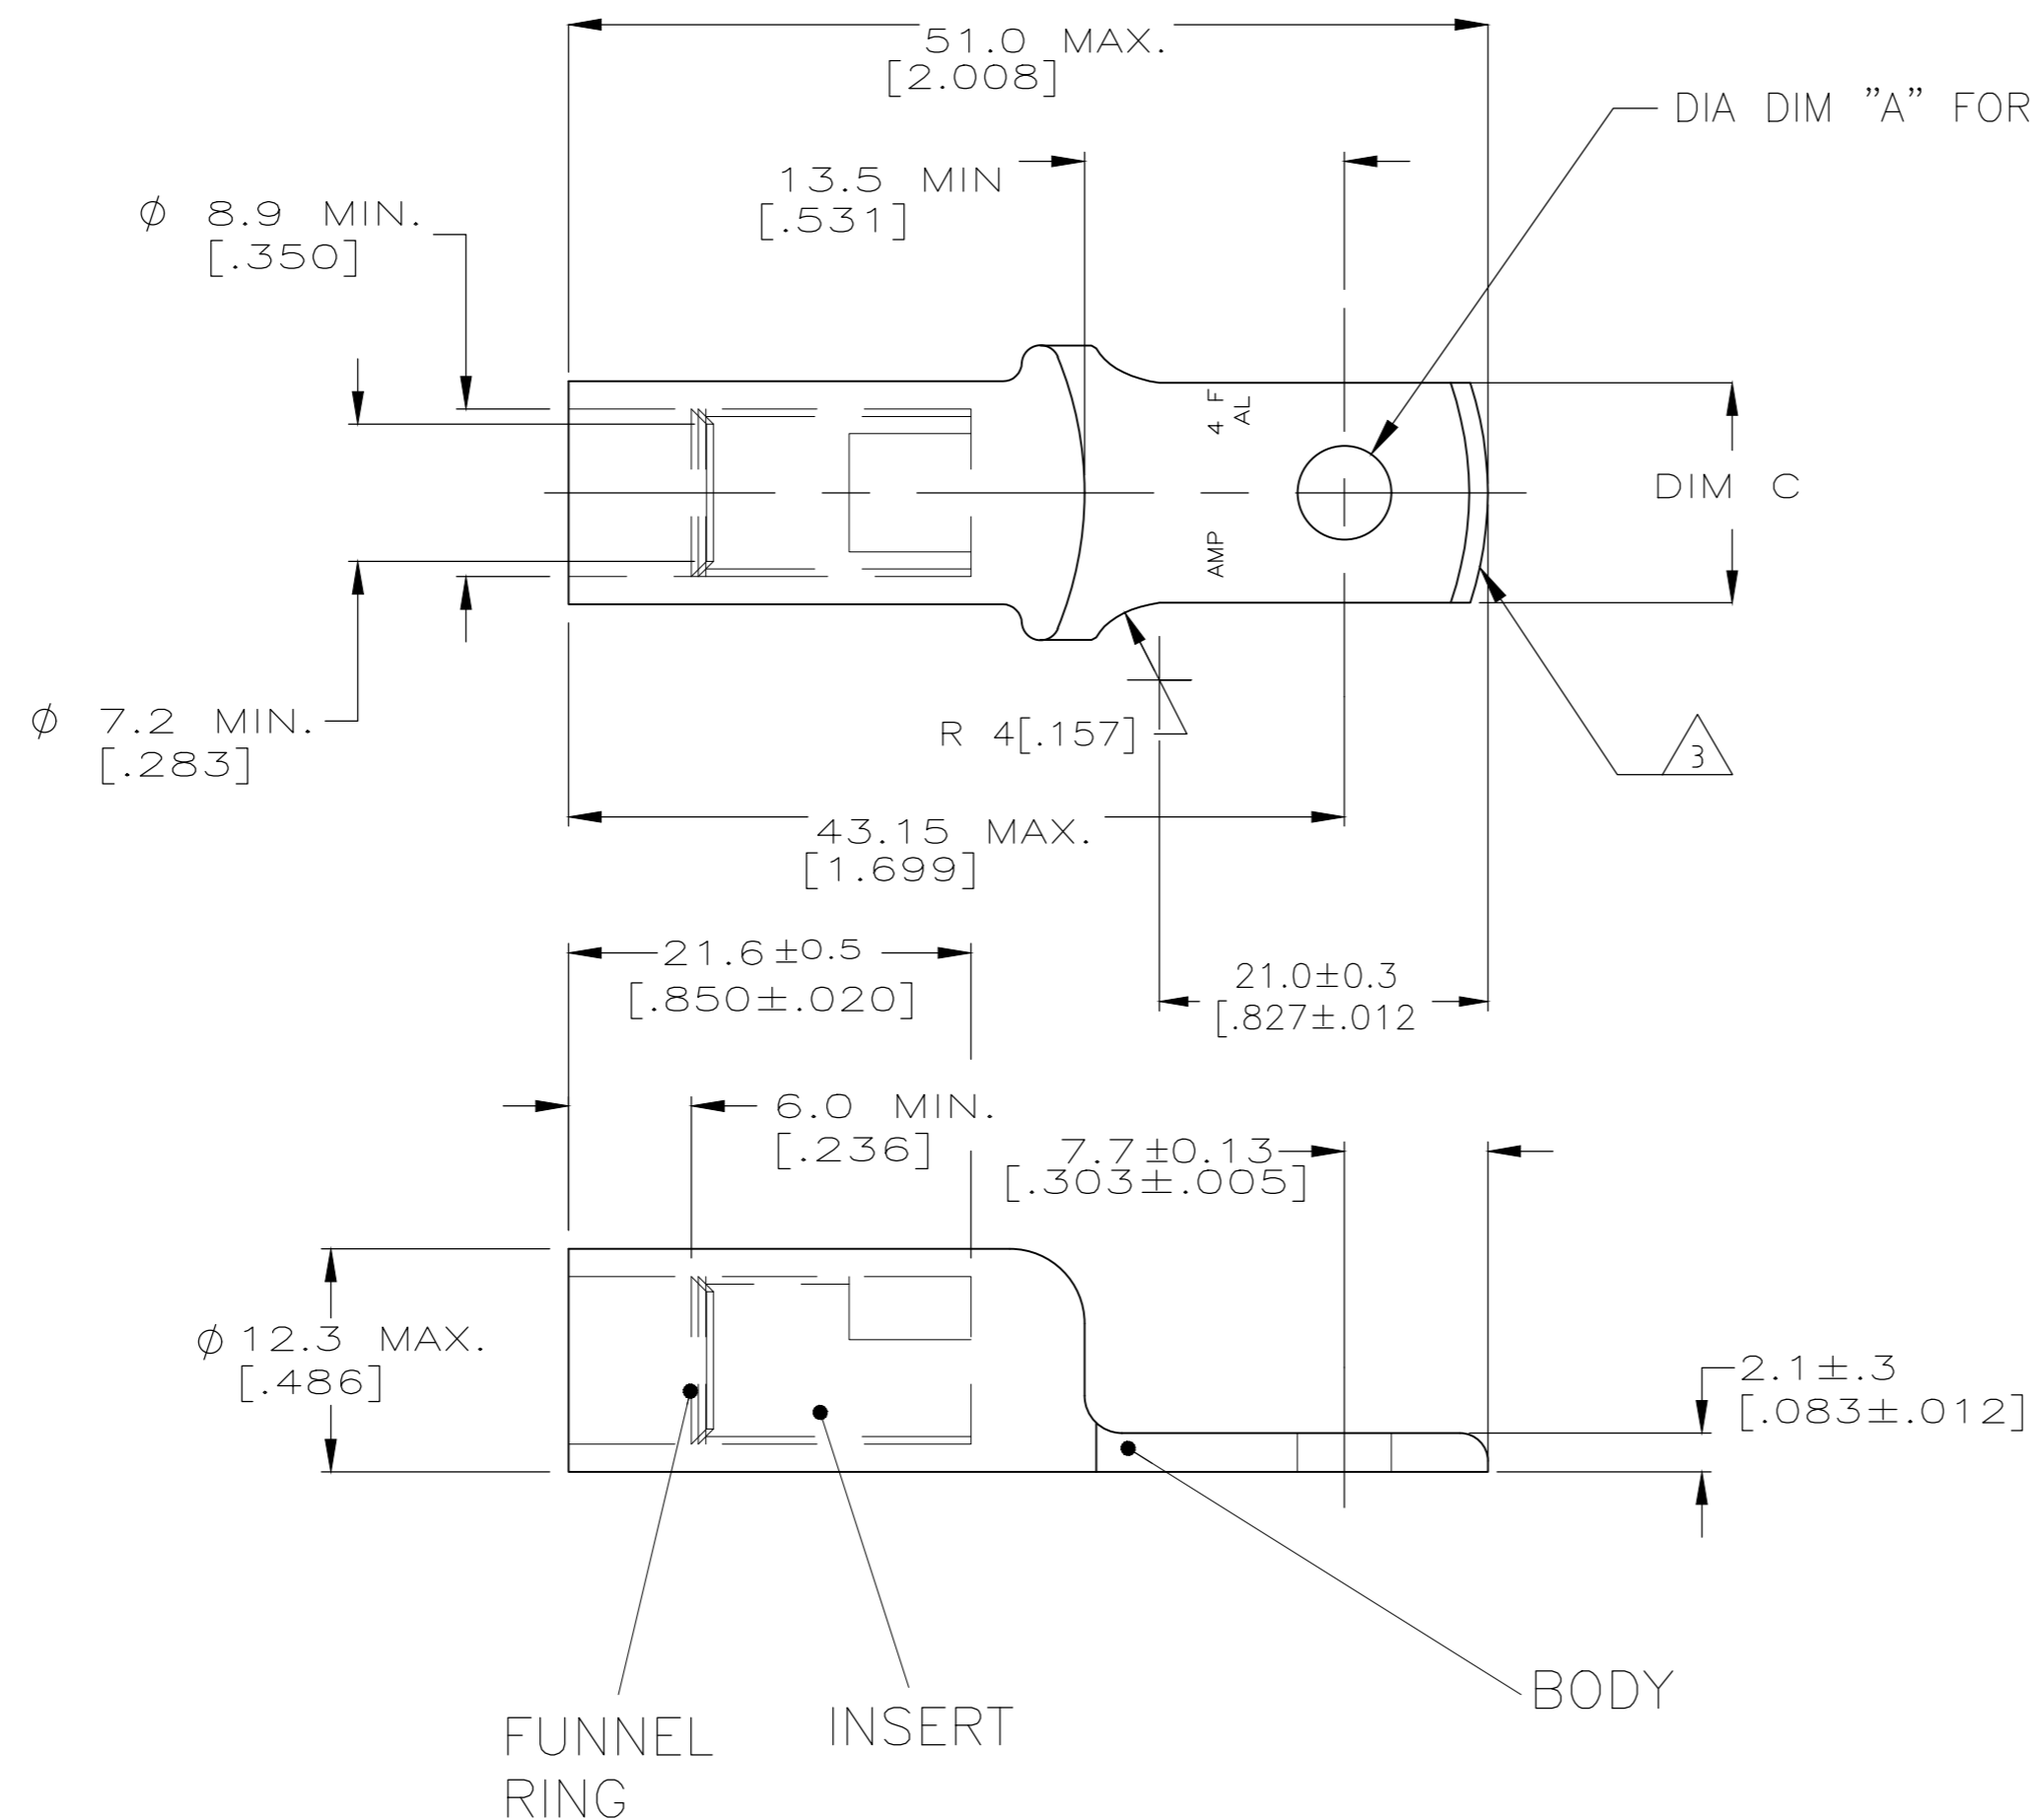

136059-2 AS SHOWN

OBSOLETE

△1: WIRE INSULATION: 7.01-7.75 [0.276-0.305]

△2 ALUMINUM WIRE CMA: 42331
WIRE: mm2: 21.4

△3: THE TONGUE RADIUS FEATURE IS NOT A TOOLING CONTROLLED DIMENSION AND MAY NOT BE A TRUE RADIUS.

19.5 GRAMS	10 or M5	11.8±0.13 [.464±.005]	5.04+/-0.13 [.198±.005]	BODY: COPPER ASTM-B187 ANNEALED TIN PLATE 0.00381[.000150] MIN THICK PER MIL-T-10727	136059-2
21 GRAMS	10 or M5	15.8+0.13/-0.26 [.622+.005/-0.010]	5.04+/-0.13 [.198+/-0.005]	INSERT & FUNNEL: BRASS ASTM B36 NICKEL PLATE SAM AMS QQ-N-290A, DATED JULY 2000,.00254 [.000100] MIN THICK	136059-1
WEIGHT	B	DIM C	DIM A	MATERIAL & FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JJ DESPRETZ 09/92	TE Connectivity		
DIMENSIONS: mm		CHK G.ROBERT 16-JAN-97			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G.ROBERT 16-JAN-97	NAME		
0 PLC ± -		PRODUCT SPEC	TERMINAL, SEALED COPALUM WIRE SIZE: 4 AL		
1 PLC ± -		APPLICATION SPEC	-		
2 PLC ± -		FINISH	SIZE	CAGE CODE	DRAWING NO
3 PLC ± -		VOIR TABLEAU	A2	00779	C=136059
4 PLC ± -		VOIR TABLEAU	WEIGHT	0.000000	RESTRICTED TO
ANGLES ± -		CUSTOMER DRAWING	SCALE	2:1	SHEET 1 of 1
			REV	K	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)