


REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|-----|---------------|-----------|-----|------|
| | B | ECR-21-103657 | 08JUN2021 | JZ | WKH |

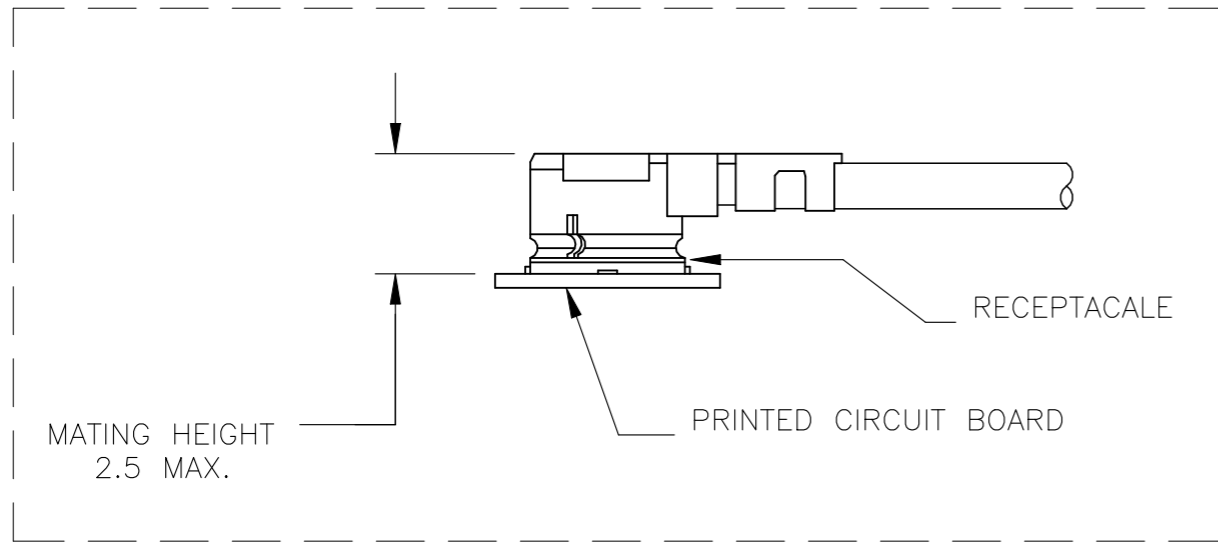


1. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE CONNECTIVITY STANDARD 230-702.

2 HIROSE COMPATIBLE, 2.5 mm MATING HEIGHT. UMCC CONNECTOR TYPE III.


3. CABLE ASSEMBLY TO BE 100% ELECTRICALLY TESTED FOR OPENS, SHORTS AND CONTINUITY. HI-POT AT 150 VDC FOR 100mS VSWR: 1.5:1 MAX.

4 H.S.T WILL BE 15REF FOR -2
5 CABLE RETENTION FORCE 4N MAX.

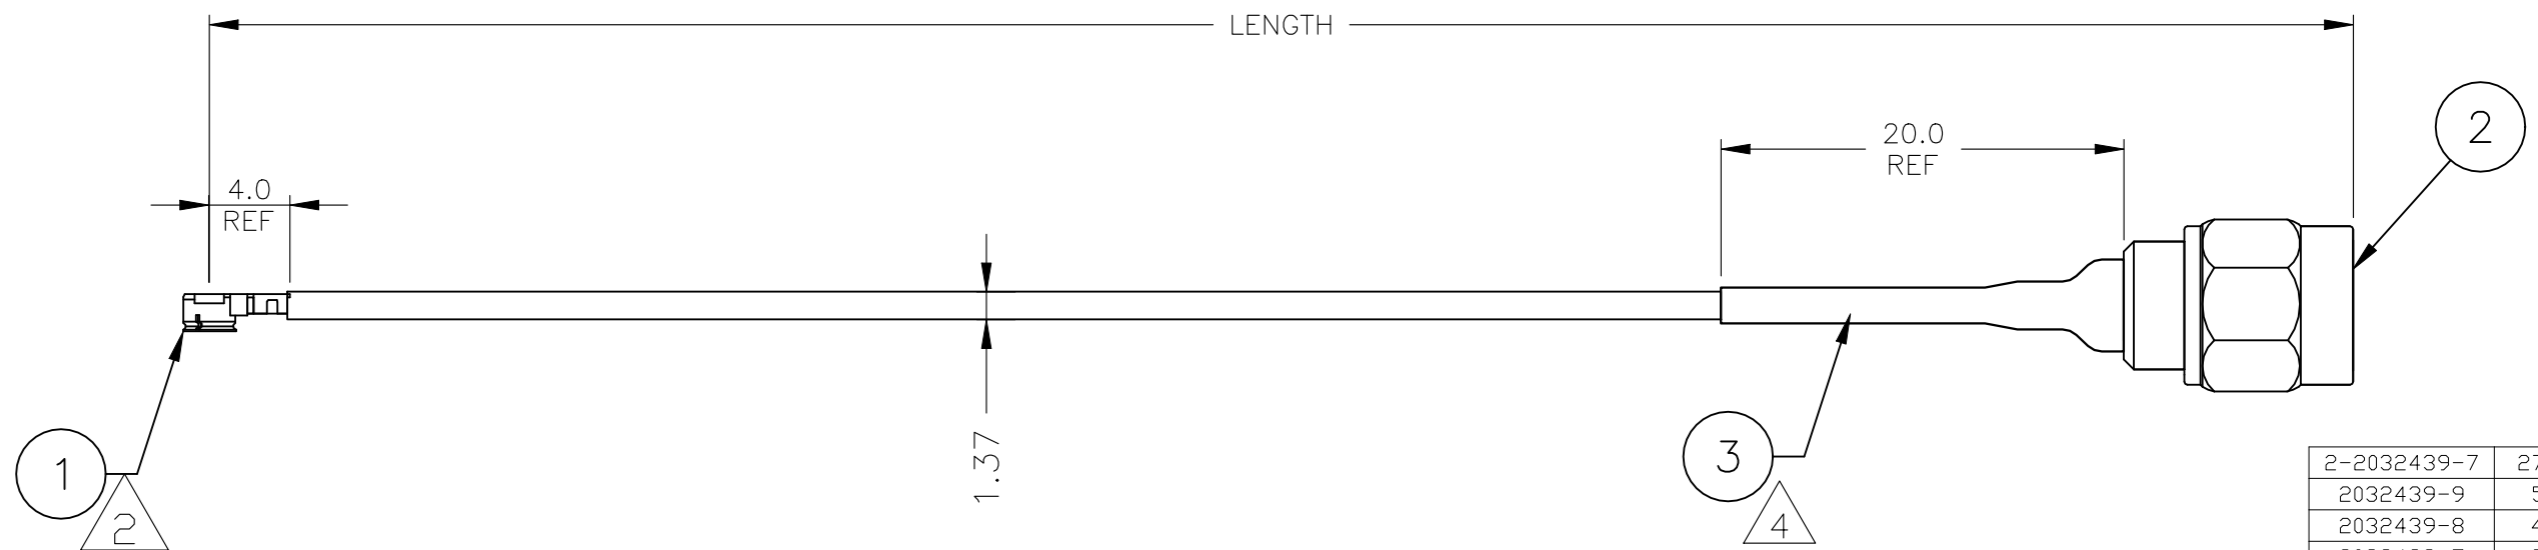

| | |
|-------------|---------|
| 2-2032439-7 | 2743±15 |
| 2032439-9 | 500±4 |
| 2032439-8 | 450±4 |
| 2032439-7 | 350±3 |
| 2032439-6 | 300±3 |
| 2032439-5 | 250±3 |
| 2032439-4 | 150±3 |
| 2032439-3 | 100±3 |
| 2032439-2 | 50±2 |
| 2032439-1 | 200±3 |
| PART NUMBER | LENGTH |

| 1 | PC | TUBING, ADHESIVE HEAT SHRINK | 3 |
|------|-----|------------------------------|------|
| 1 | PC | SMA, PLUG | 2 |
| 1 | PC | UMCC, PLUG WITH 1.37 CABLE | 1 |
| Q'TY | U/M | DESCRIPTION | ITEM |

| | | | | | | | | | | | | | | |
|--|-----|------------------------------------|--|-----------------|-----|-------|-----|-------|-----|-------|-----|-------|-----|--------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN E.C. CLAYBAUGH 04/DEC/07 |  TE Connectivity | | | | | | | | | | | |
| DIMENSIONS: mm [INCHES] | | CHK J. ORNER 04/DEC/07 | | | | | | | | | | | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD J. ORNER 04/DEC/07 | | | | | | | | | | | | |
| <table border="0"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± -</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> </table> | | 0 PLC | | | ± - | 1 PLC | ± - | 2 PLC | ± - | 3 PLC | ± - | 4 PLC | ± - | ANGLES |
| 0 PLC | ± - | | | | | | | | | | | | | |
| 1 PLC | ± - | | | | | | | | | | | | | |
| 2 PLC | ± - | | | | | | | | | | | | | |
| 3 PLC | ± - | | | | | | | | | | | | | |
| 4 PLC | ± - | | | | | | | | | | | | | |
| ANGLES | ± - | | | | | | | | | | | | | |
| MATERIAL | | FINISH | CABLE ASSY, RF, UMCC PLUG TO SMA PLUG [1.37mm CABLE] | | | | | | | | | | | |
| - | | - | SIZE | RESTRICTED TO | | | | | | | | | | |
| | | WEIGHT 0.000000 | A3 00779 | C-2032439 | | | | | | | | | | |
| CUSTOMER DRAWING | | | SCALE N.T.S. | SHEET 1 OF 1 | | | | | | | | | | |
| | | | REV B | | | | | | | | | | | |

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)