


## SPECIFICATION CONTROL DRAWING

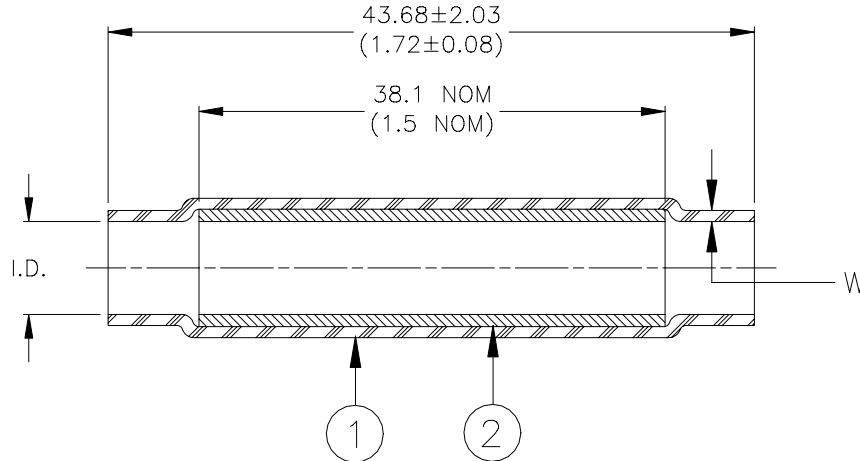

### MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. MELTABLE LINER: Fluorocarbon-based thermoplastic, color-natural.

### APPLICATION

1. This part is designed to insulate and strain relieve an in-line splice in wires having jacket diameters between 2.54 (0.100) and 3.81 (0.150) and a temperature rating of at least 125°C.

Dimensions:

Part Name	I.D.		W	Maximum Weight
	As Received min	Recovered <sup>1</sup> max	Recovered nom	Lbs/mpc
D-436-0118	8.89 (0.350)	5.08 (0.200)	0.38 (0.015)	4.2

(1) I.D. of insulation sleeve after recovery at 300°C for five (5) minutes.

<b>Raychem Interconnect</b> <small>a division of <b>tyco</b> Electronics</small> 300 Constitution Drive Menlo Park, CA 94025, USA		THERMOFIT DEVICES		TITLE : <b>SEALING SLEEVE,          TWO TO ONE SPLICE</b>			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO.: <b>D-436-0118</b>			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: <b>D001276</b>		REPLACES: <b>N/A</b>	
DRAWN BY: M. FORONDA	DATE: 14-Nov.-00	PROD. REV. C	DOC ISSUE: 1	SCALE: None	SIZE: A	SHEET: 1 of 1	

If this document is printed it becomes uncontrolled. Check for the latest revision.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)