



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
Y		REVISED PER ECO-16-006307	03AUG2016	NK MM

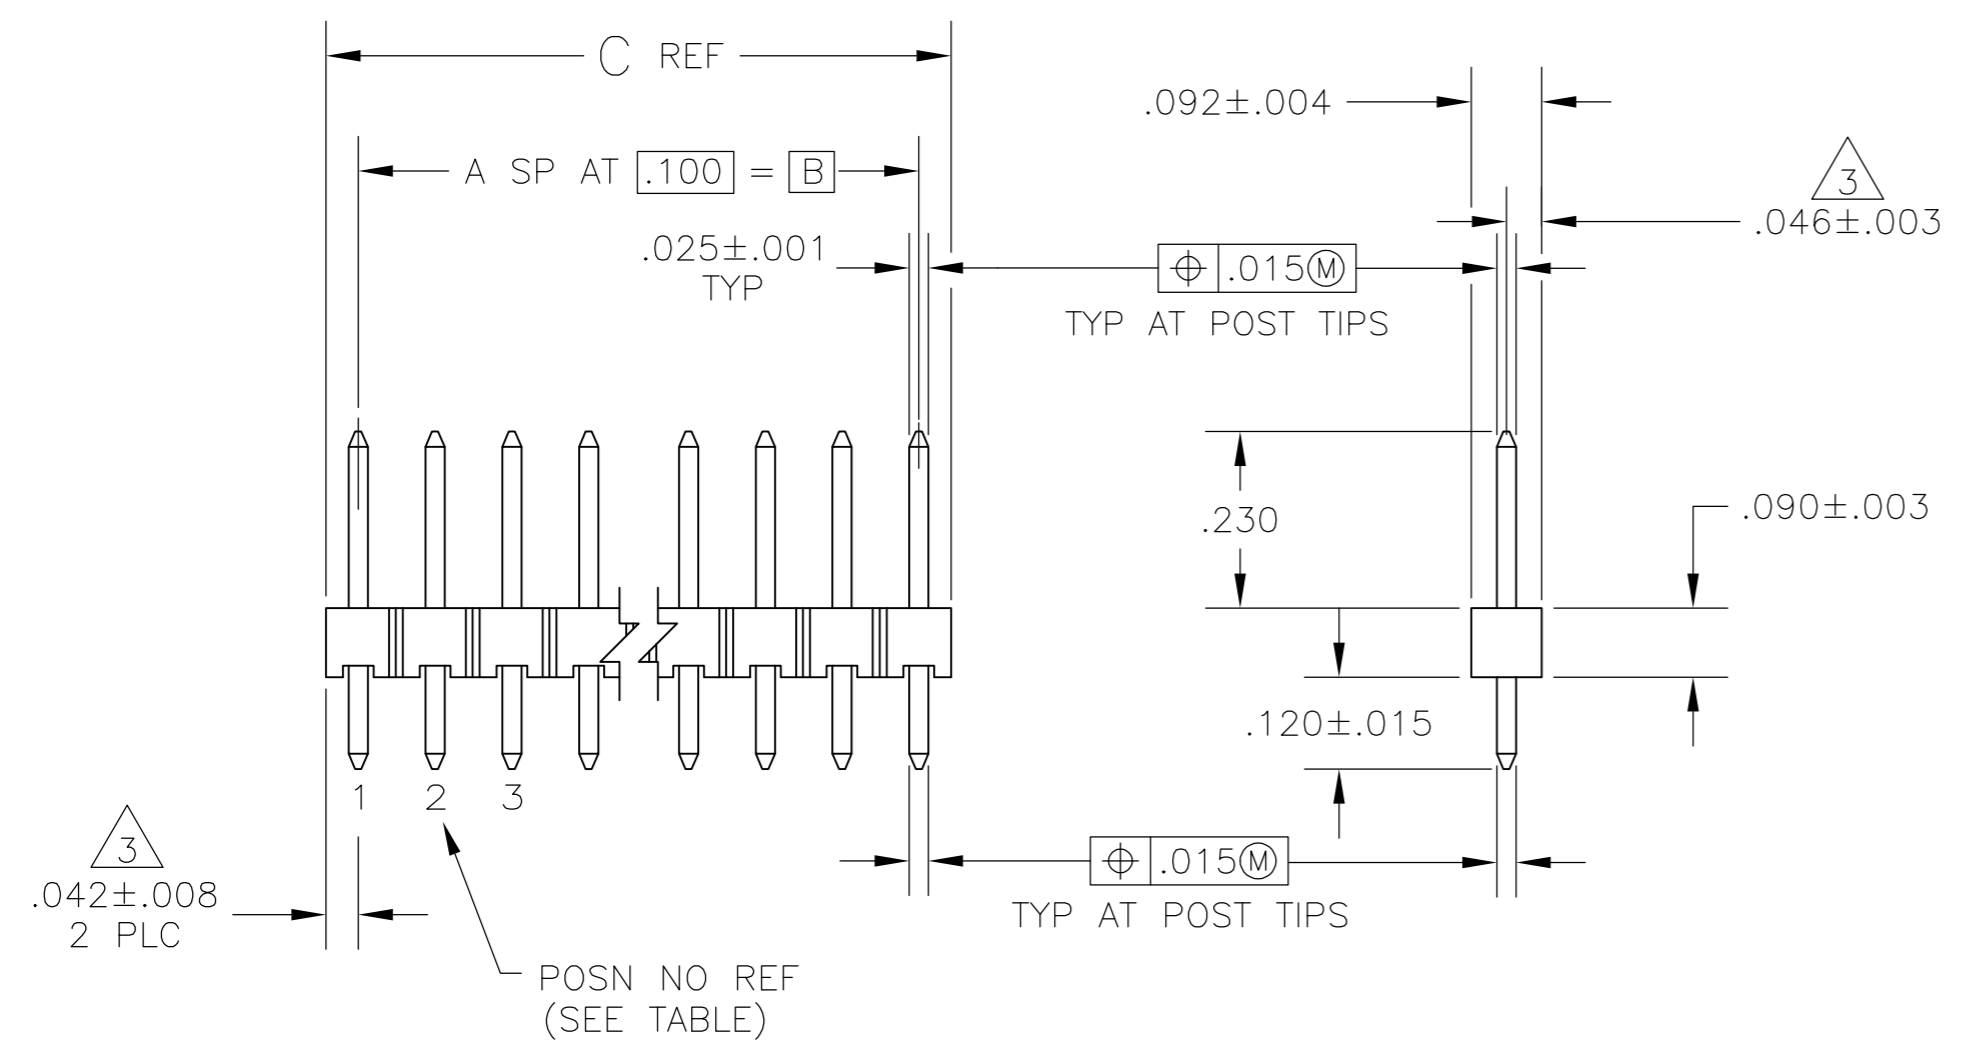

- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC: COLOR-BLACK. POSTS: COPPER ALLOY
- 5 POSTS: .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL.
- 6 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 7 .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
- 8 POSTS: .000100-.000200 MATTE TIN OVER .000050 NICKEL.
- 9 HIGH TEMPERATURE CONFIGURATION
- 10 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

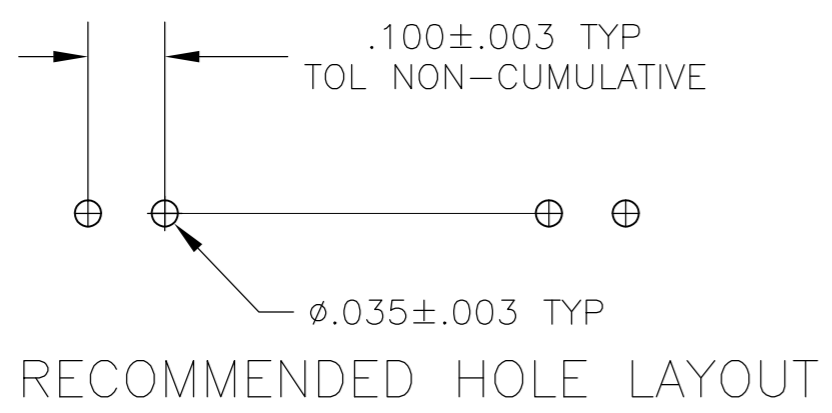

REMARKS	POST OMITTED	PLATING	C	B	A	NO OF ACTIVE POSN	NO OF POSN	ASSEMBLY PART NUMBER
								6-103547-0
10 OBSOLETE								5-103547-7
10 OBSOLETE								5-103547-6
10 OBSOLETE								5-103547-5
10 OBSOLETE								5-103547-4
10 OBSOLETE								5-103547-1
10 OBSOLETE								103547-9
10 OBSOLETE								103547-8
10 OBSOLETE								103547-7
10 OBSOLETE								103547-6
10 OBSOLETE								103547-5
10 OBSOLETE								103547-4
10 OBSOLETE								103547-3
10 OBSOLETE								103547-2
10 OBSOLETE								103547-1

THIS DRAWING IS A CONTROLLED DOCUMENT. DWN G DOUITY 24 JAN 2002
 CHK T CLARK 05 APR 88

DIMENSIONS: INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ± -
 1 PLC ± -
 2 PLC ± -
 3 PLC ± .005
 4 PLC ± -
 ANGLES ± -
 FINISH SEE TABLE

MATERIAL 4

TE Connectivity
 HEADER ASSY, MOD II, BREAKAWAY, SINGLE ROW, .100 C/L, .025 SQUARE, POSTS, WITH SELECTIVE LOADING

SIZE A2 CAGE CODE 00779 DRAWING NO C=103547 RESTRICTED TO -
 SCALE 4:1 SHEET 1 of 1 REV Y

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)