



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	-	E		REVISED PER ECO-13-015151	16DEC2013	FL	FY

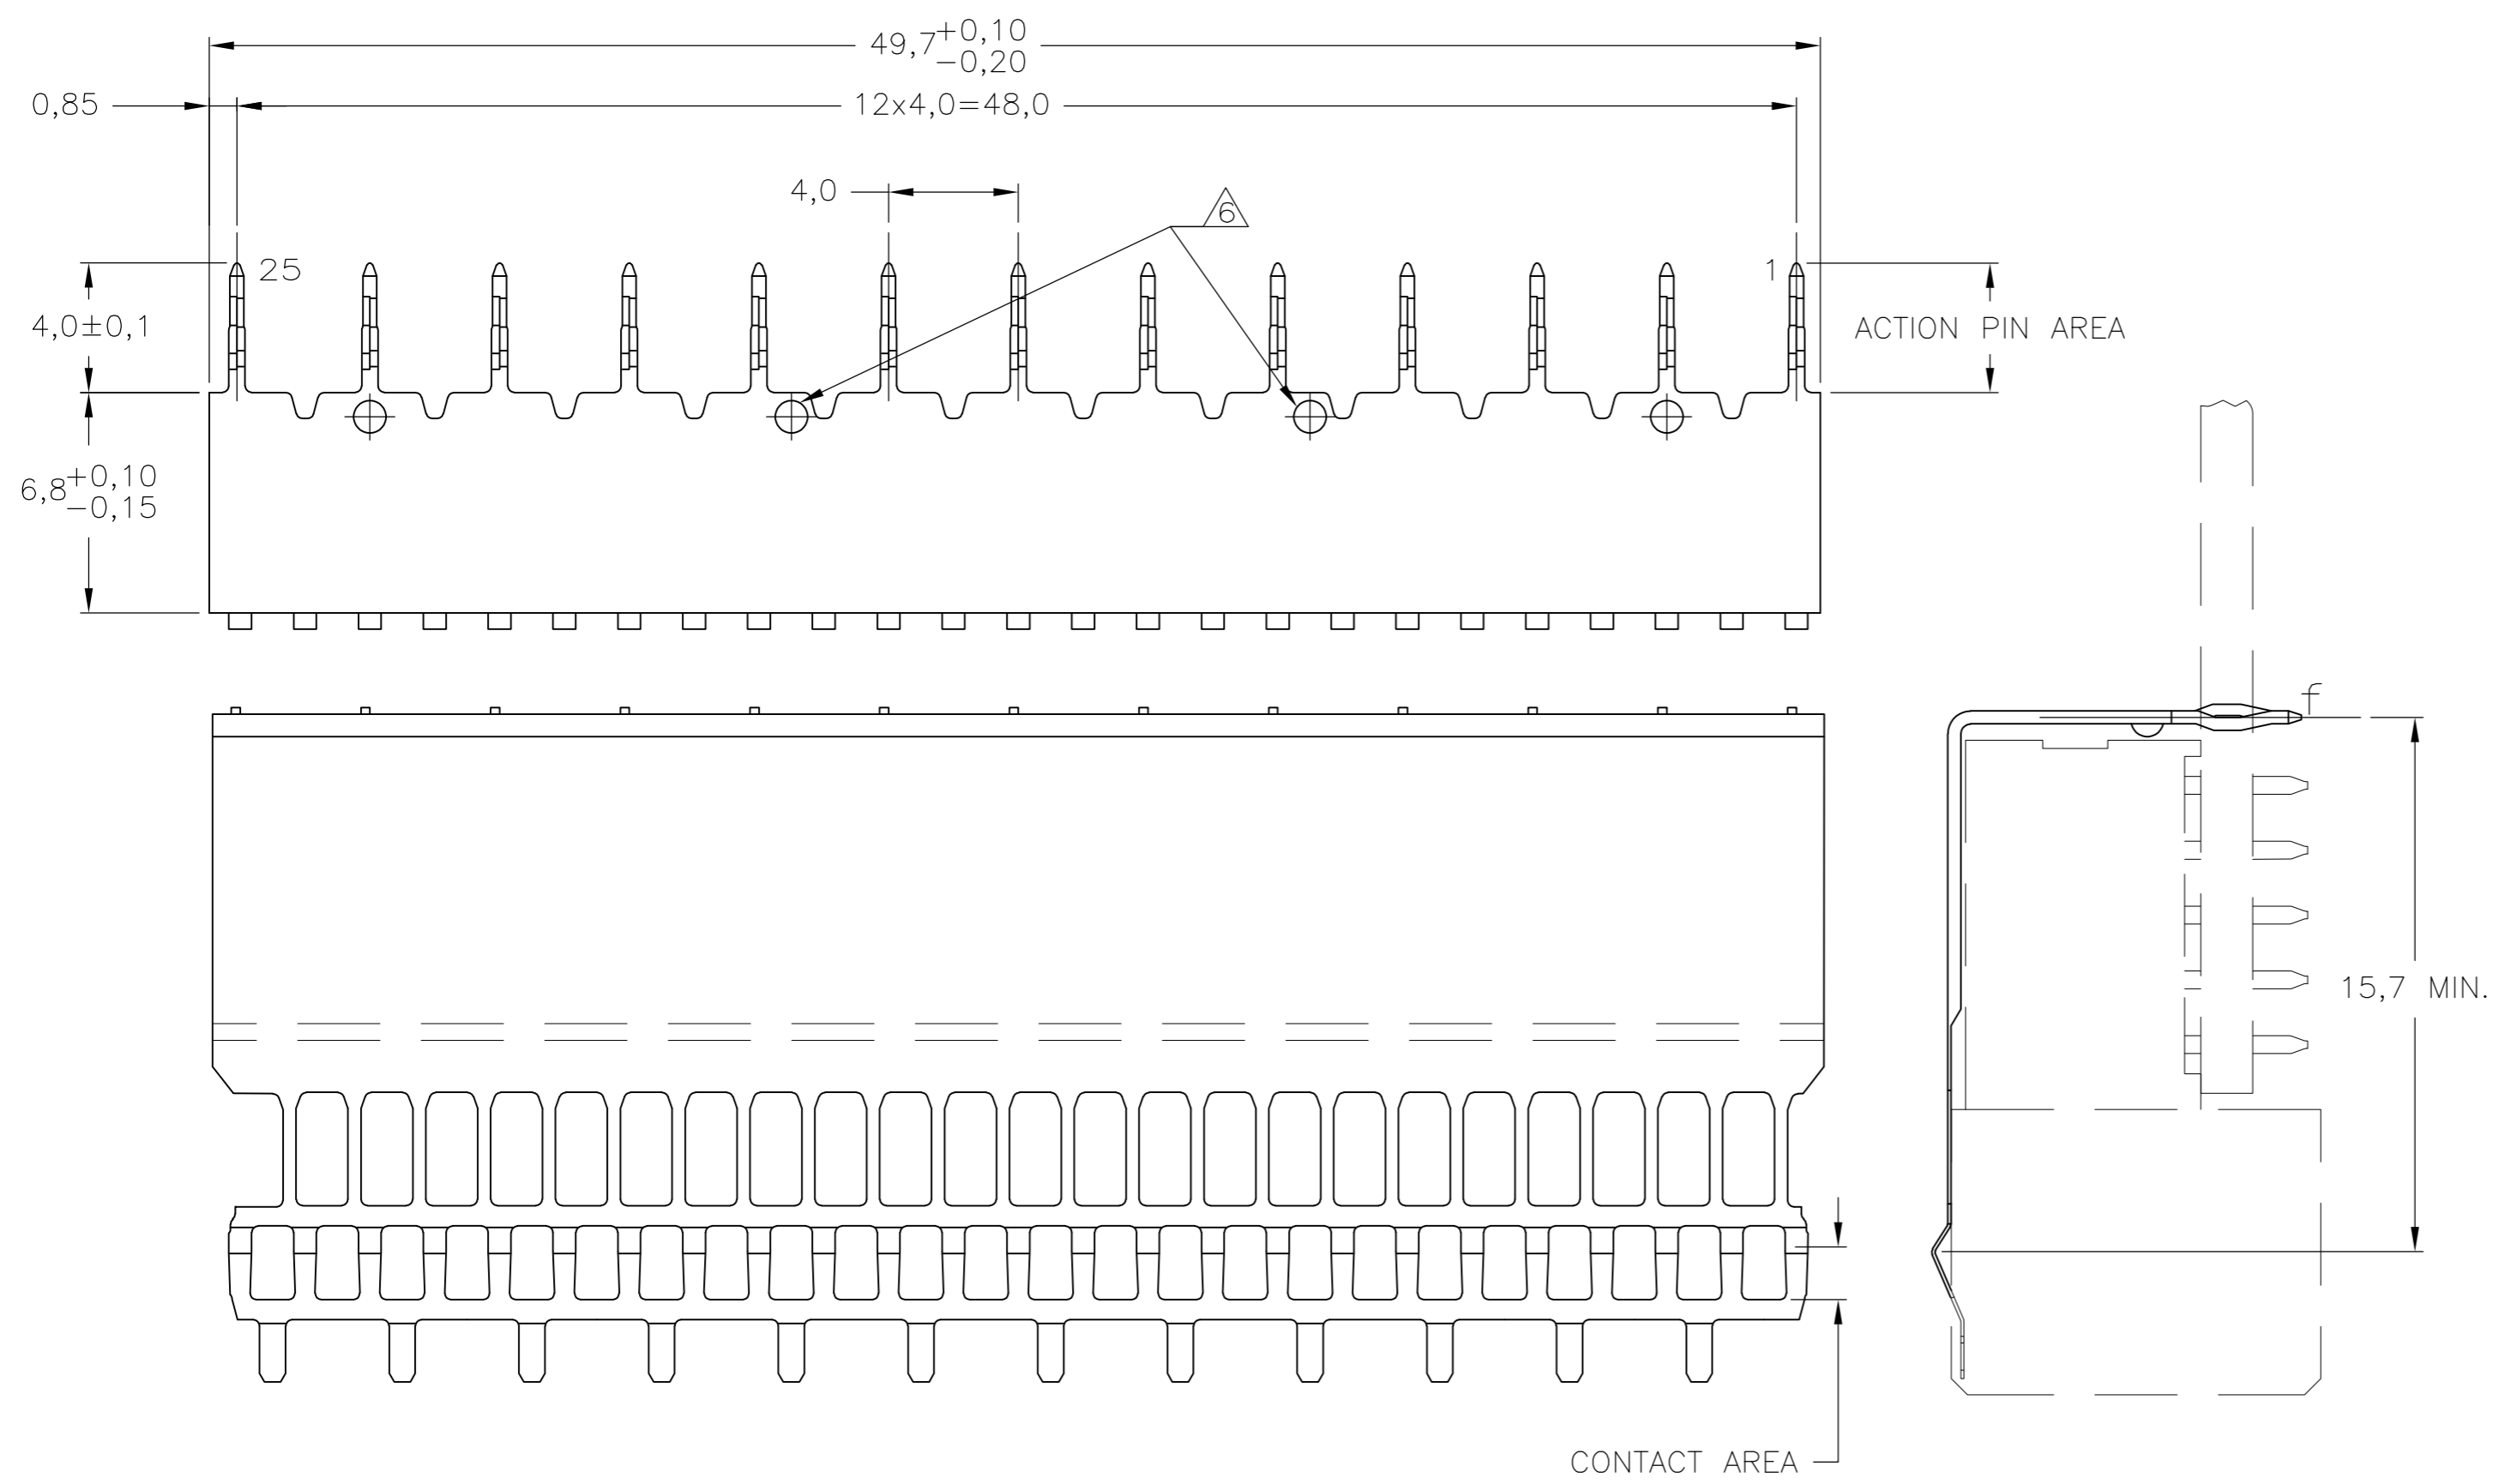

- NOTES:
- ⚠ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN.AND ACTION PIN: 0,5µm TIN MIN. FOR PLATING OF MATING SURFACES SEE PERFORMANCE LEVEL SHOWN IN PART NUMBER TABLE.
  - ⚠ MATERIAL; PHOSPHORBRONZE.
  - ⚠ ROW "f" 13 PLATED THROUGH HOLES FOR UPERSHIELD
  - ⚠ HOLE PATTERN FOR FEMALE CONNECTOR TYPE B-25 COLUMNS
  - ⚠ 125 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
  - ⚠ SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.
  - ⚠ OPTIONAL DIMPLES AT DISCRETION OF DIE ENGINEER.
  - ⚠ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
  - ⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
  - ⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
  - ⚠ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III,CENTRAL OFFICE APPLICATIONS.
  - ⚠ 0.76µm MIN GOLD PLATING AT MATING SURFACE.

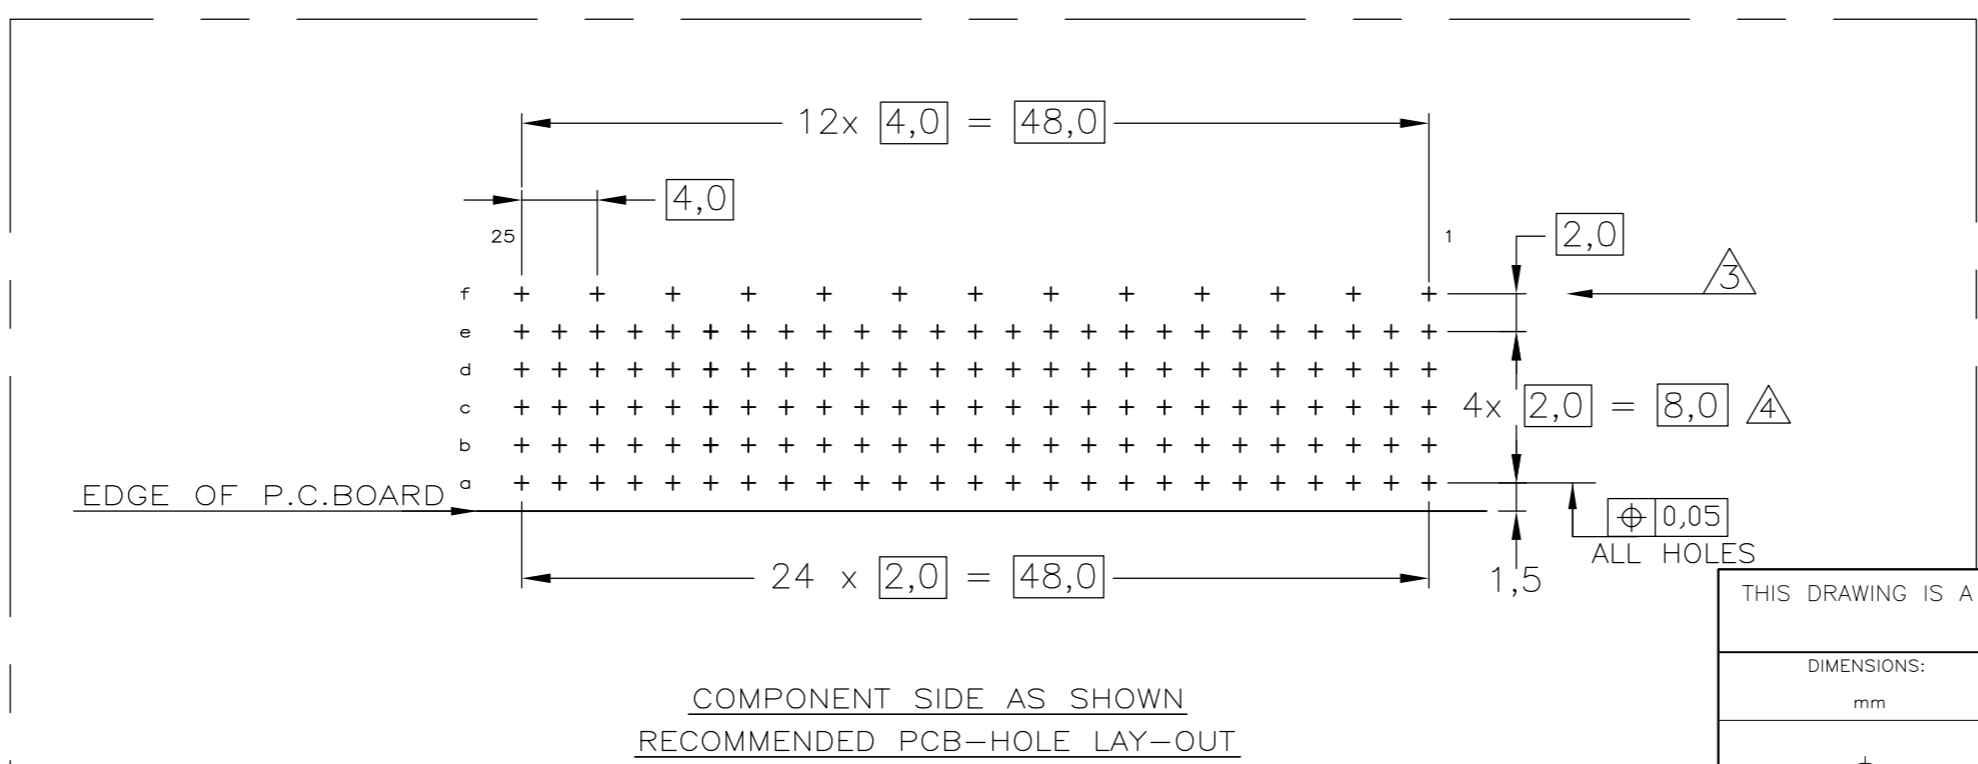

P.C.B. HOLE DIM. ACTION PIN  
 FOR DETAILS SEE APPLICATION SPECIFICATION

FINISH	MATERIAL	PARTNUMBER
⚠ 8 11	⚠	8-5338109-4
⚠ 5 10	⚠	5338109-9
⚠ 8	⚠	5338109-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	K.N.KIRAN	13AUG04
CHK	B.MOOIJ	25MAR05
APVD	B.MOOIJ	25MAR05
PRODUCT SPEC	108-19082	
APPLICATION SPEC	114-19029	
WEIGHT	-	

**TE** TE Connectivity

Z-PACK 2mm HM  
 GROUND RETURN UPPER SHIELD  
 TYPE B-25 COLUMNS

SIZE	A2	CAGE CODE	00779	DRAWING NO	C=5338109	RESTRICTED TO	-
SCALE	5:1	SHEET	1 of 1	REV	E		

5338109

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)