


REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
B		RELEASED AS PER ECO-17-016522	06NOV2017	JA

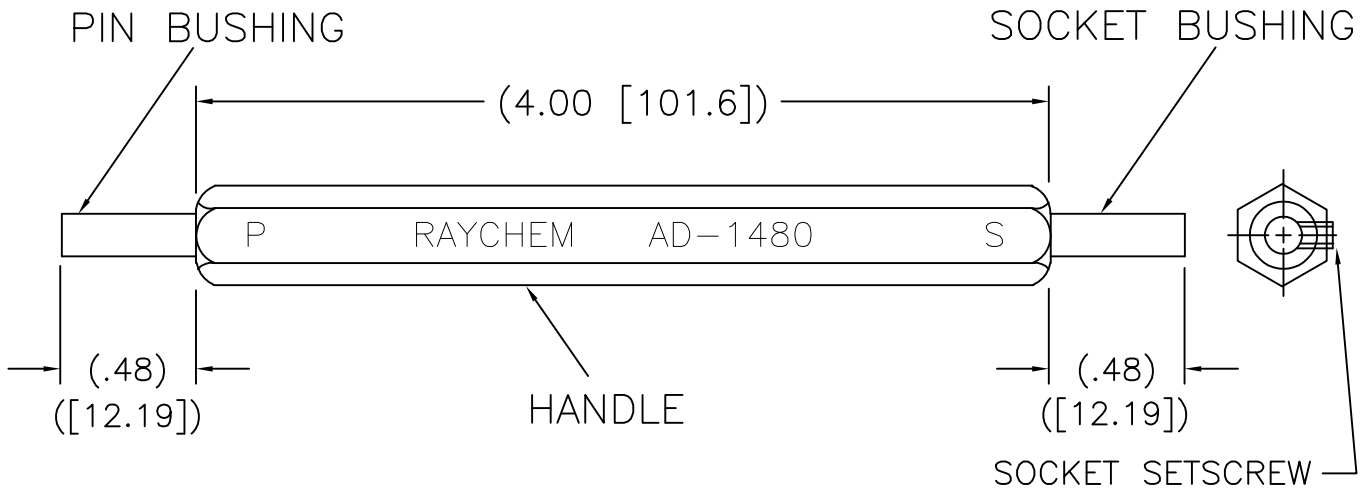

NOTES:

- FOR TERMINATION INSTRUCTIONS AND APPLICATIONS SEE ENGINEERING STANDARD (ES-61199).
- MATERIAL: HANDLE: HEX ALUMINUM 6061-T651 PER ASTM B221
PIN AND SOCKET BUSHING:
HOUSING: 303 STAINLESS STEEL PER ASTM A484
INNER STOP: BRASS 360 1/2 HARD PER ASTM B16/16M
SCREW: 4-40 UNC-2B SOCKET SETSCREW, STAINLESS STEEL


RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

© COPYRIGHT 2017 TE Connectivity Ltd.

DIMENSIONS: mm	DWN ZS. ORBAN	28NOV2005	MATERIAL	-	FINISH	-	
	CHK	-	TE Connectivity				
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M. HIGGY	28NOV2005					NAME AD-1480 REPAIR HOLDING FIXTURE
	0 PLC ± - 1 PLC ± - 2 PLC ± .01 3 PLC ± .005 4 PLC ± - ANGLES ± -	PRODUCT SPEC	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
	APPLICATION SPEC	-	A4	00779	C-AD-1480	-	
	WEIGHT	-	CUSTOMER DRAWING			SCALE	DNS
			SHEET		1 OF 1	REV	B



单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)