
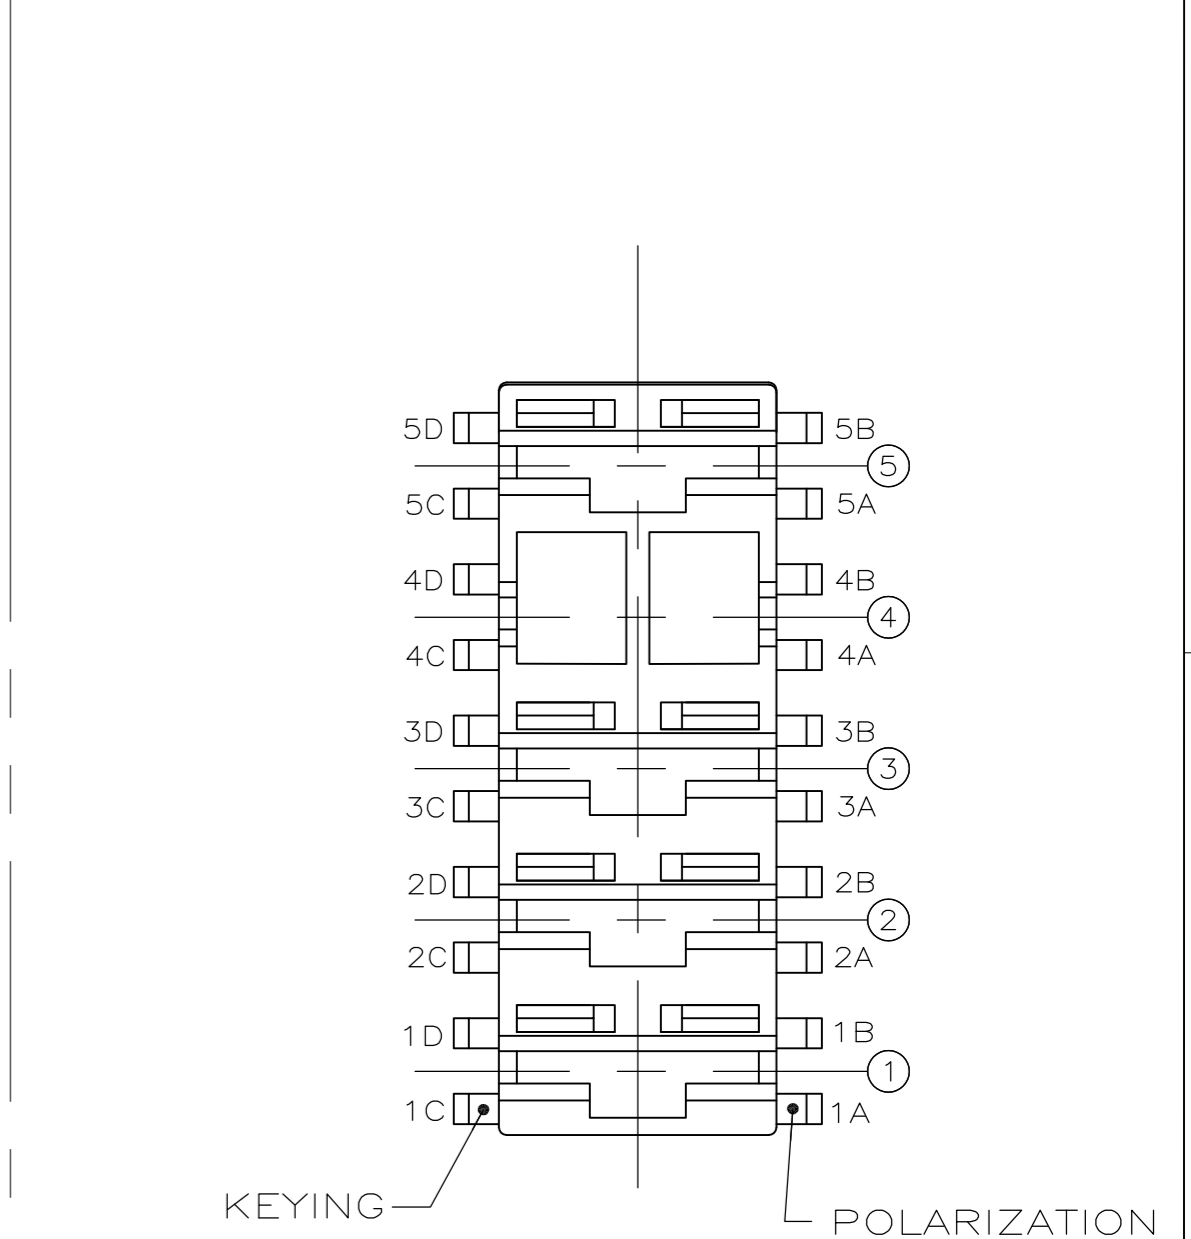


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
H		REVISED PER ECR-16-001902	22MAR2016	BW	JP

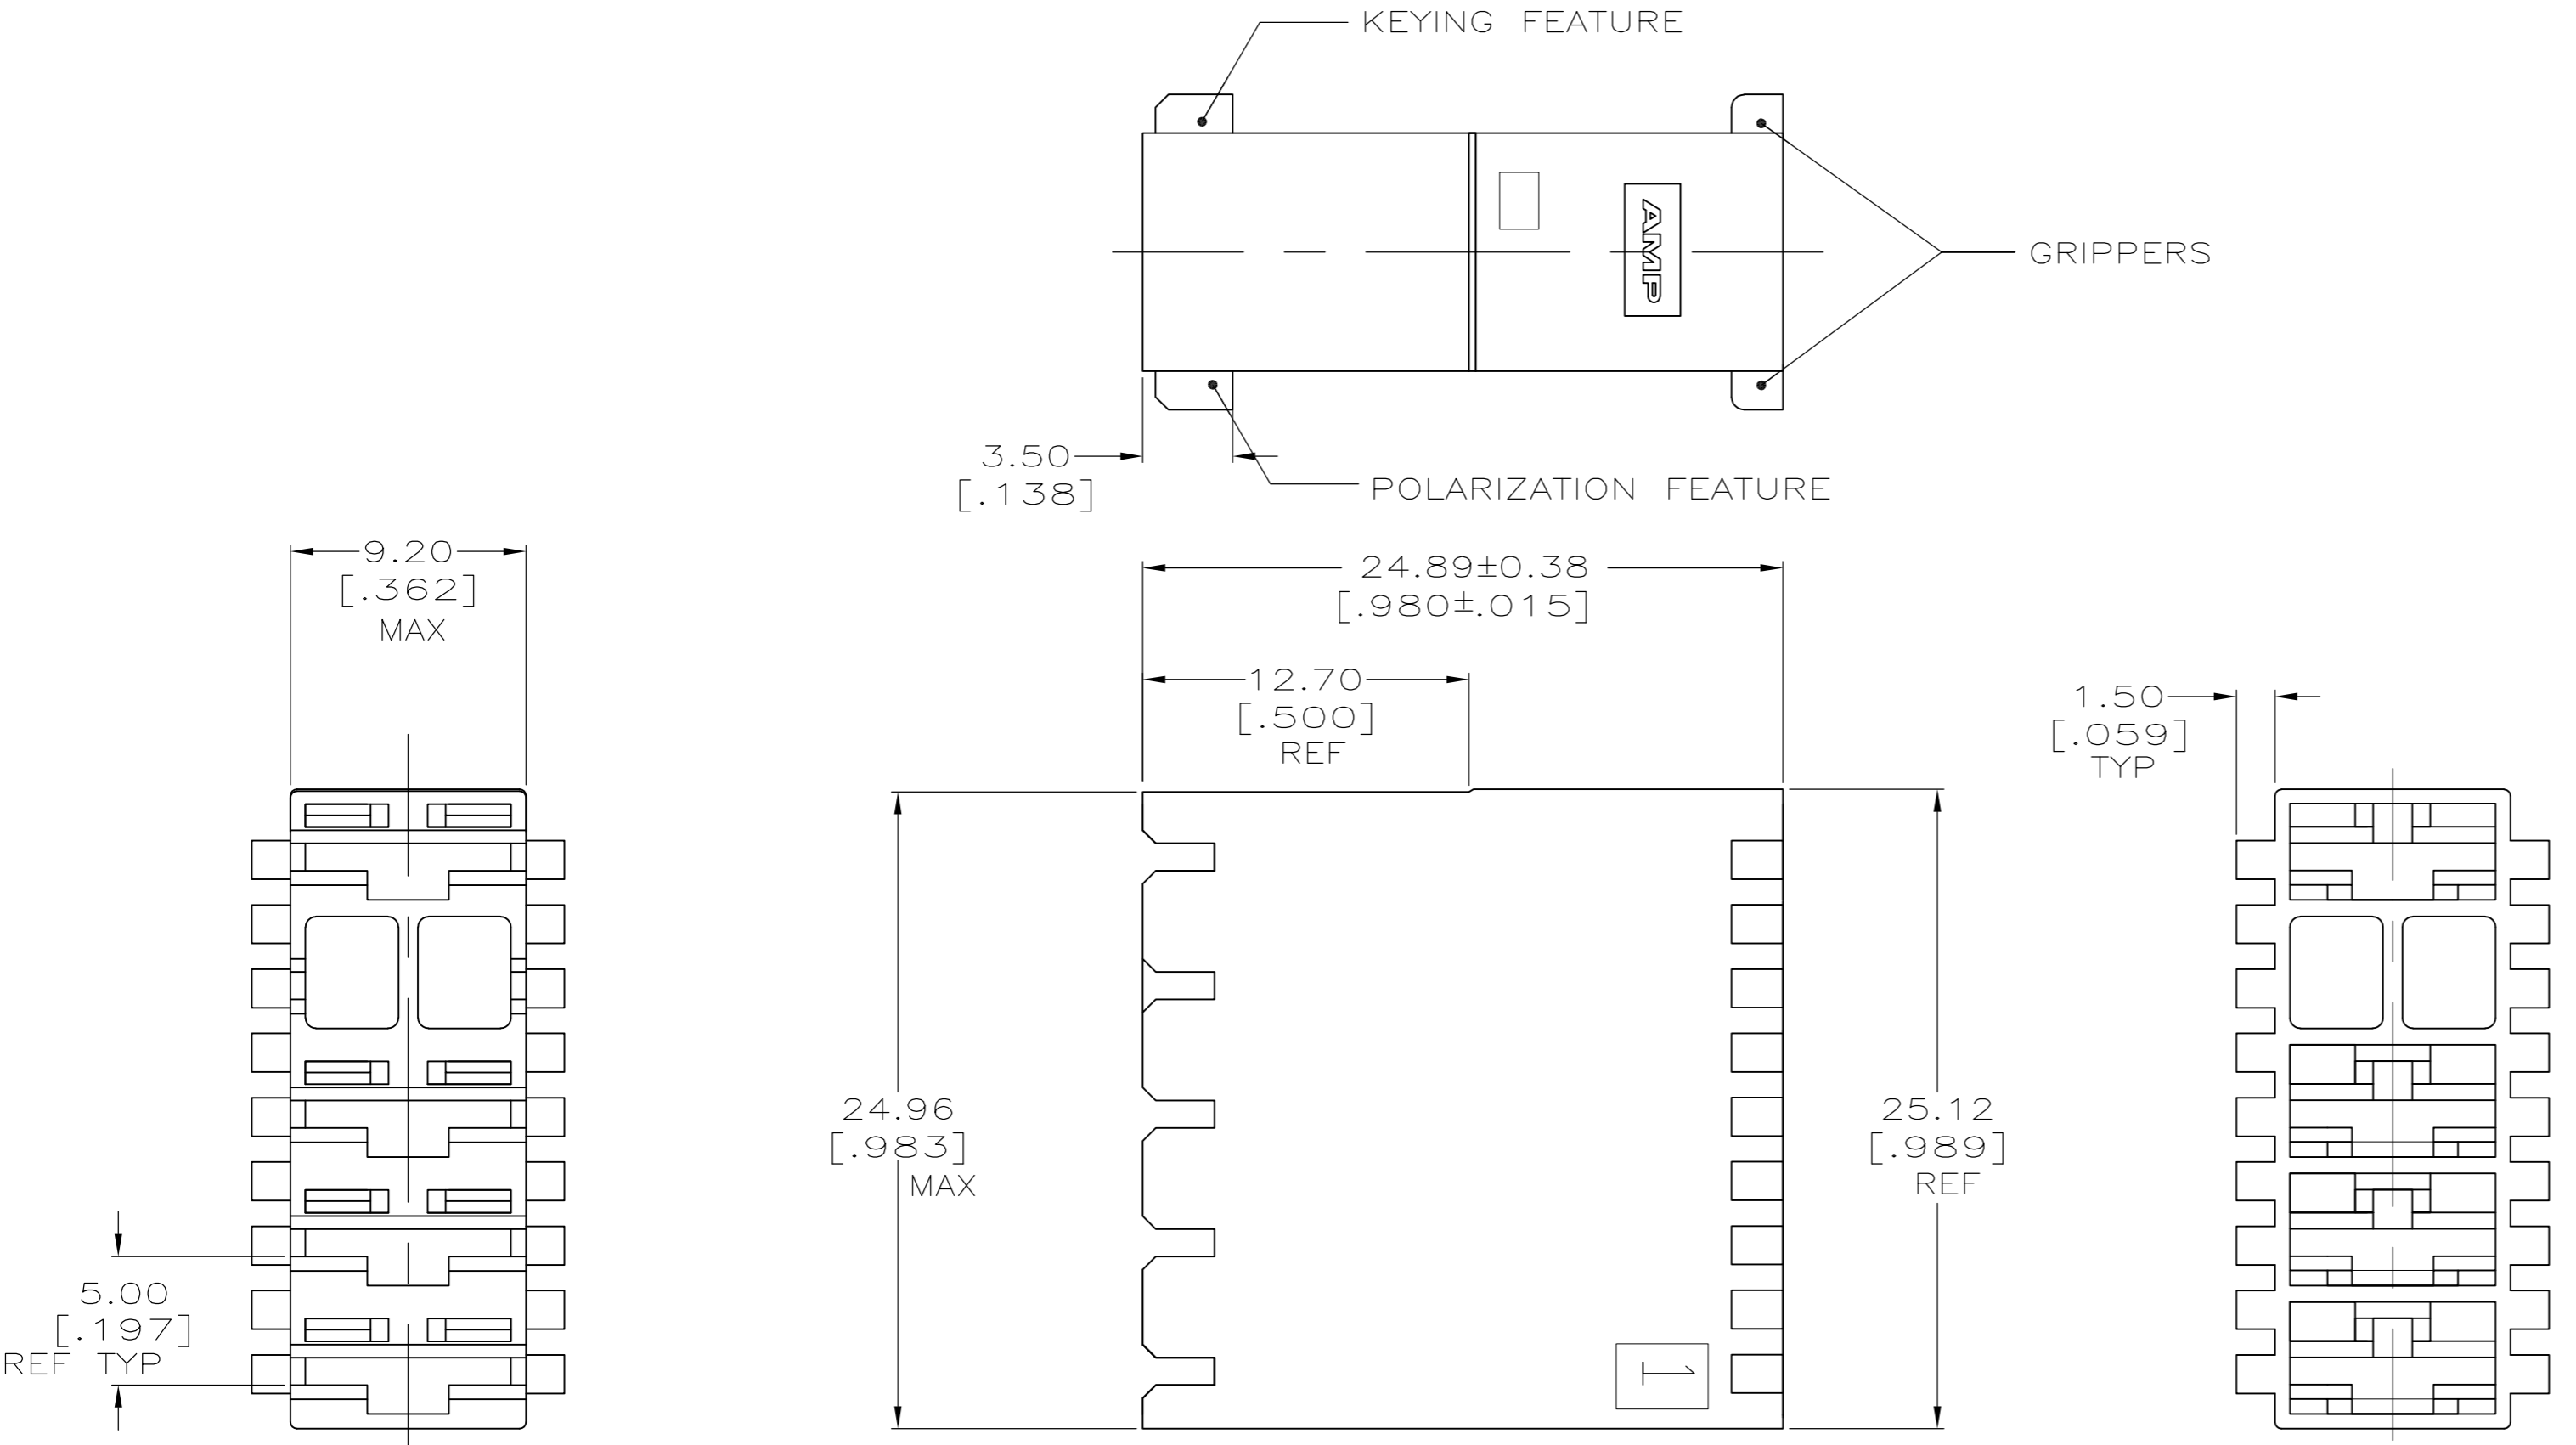

1 ACCEPTS RECEPTACLE CONTACTS 1217378(#18-#22 AWG SINGLE WIRE), 1217094(#18-#14 AWG SINGLE WIRE) AND 1217095 (TWO #18'S OR TWO #16'S OR A #16 + #18 COMBINATION).

2 FRONT AND BACK VIEWS SHOW ONLY THE GRIPPERS. FOR KEYING AND POLARIZATION FEATURES, SEE SPECIAL FRONT VIEW.

3 TAB SHOULDER SLOTS OPTIONAL ON BOTH SIDES OF DUMMY CIRCUIT.

4 PRELIMINARY - NOT FOR PRODUCTION

TBD	NONE	NONE	4 521267-2
4	NONE	NONE	521267-1
BLOCKED CIRCUIT	POLARIZATION FEATURES	KEYING FEATURE	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	14FEB00	TE Connectivity	
		CHK	14FEB00	HOUSING, RECEPT, POSITIVE-LOCK, MKIII, 6.35[.250] SERIES, 5 POSITION/4 CIRCUIT	
		APVD	14FEB00	NAME	
		PRODUCT SPEC		SIZE	
		APPLICATION SPEC	114-2074	CAGE CODE	
		MATERIAL	NYLON	DRAWING NO	
		FINISH	BLUE	WEIGHT	
				0	
				CUSTOMER DRAWING	
				SCALE	
				4:1	
				SHEET	
				1 OF 1	
				REV	
				H	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)