


REVISED PER		ECO-11-004820	DATE	BY	APPROVED
P	REVISED PER	ECO-11-004820	21MAR11	RK	HMR

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
- FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, OVER 0.00127 [.000050] NICKEL, ENTIRE POST.

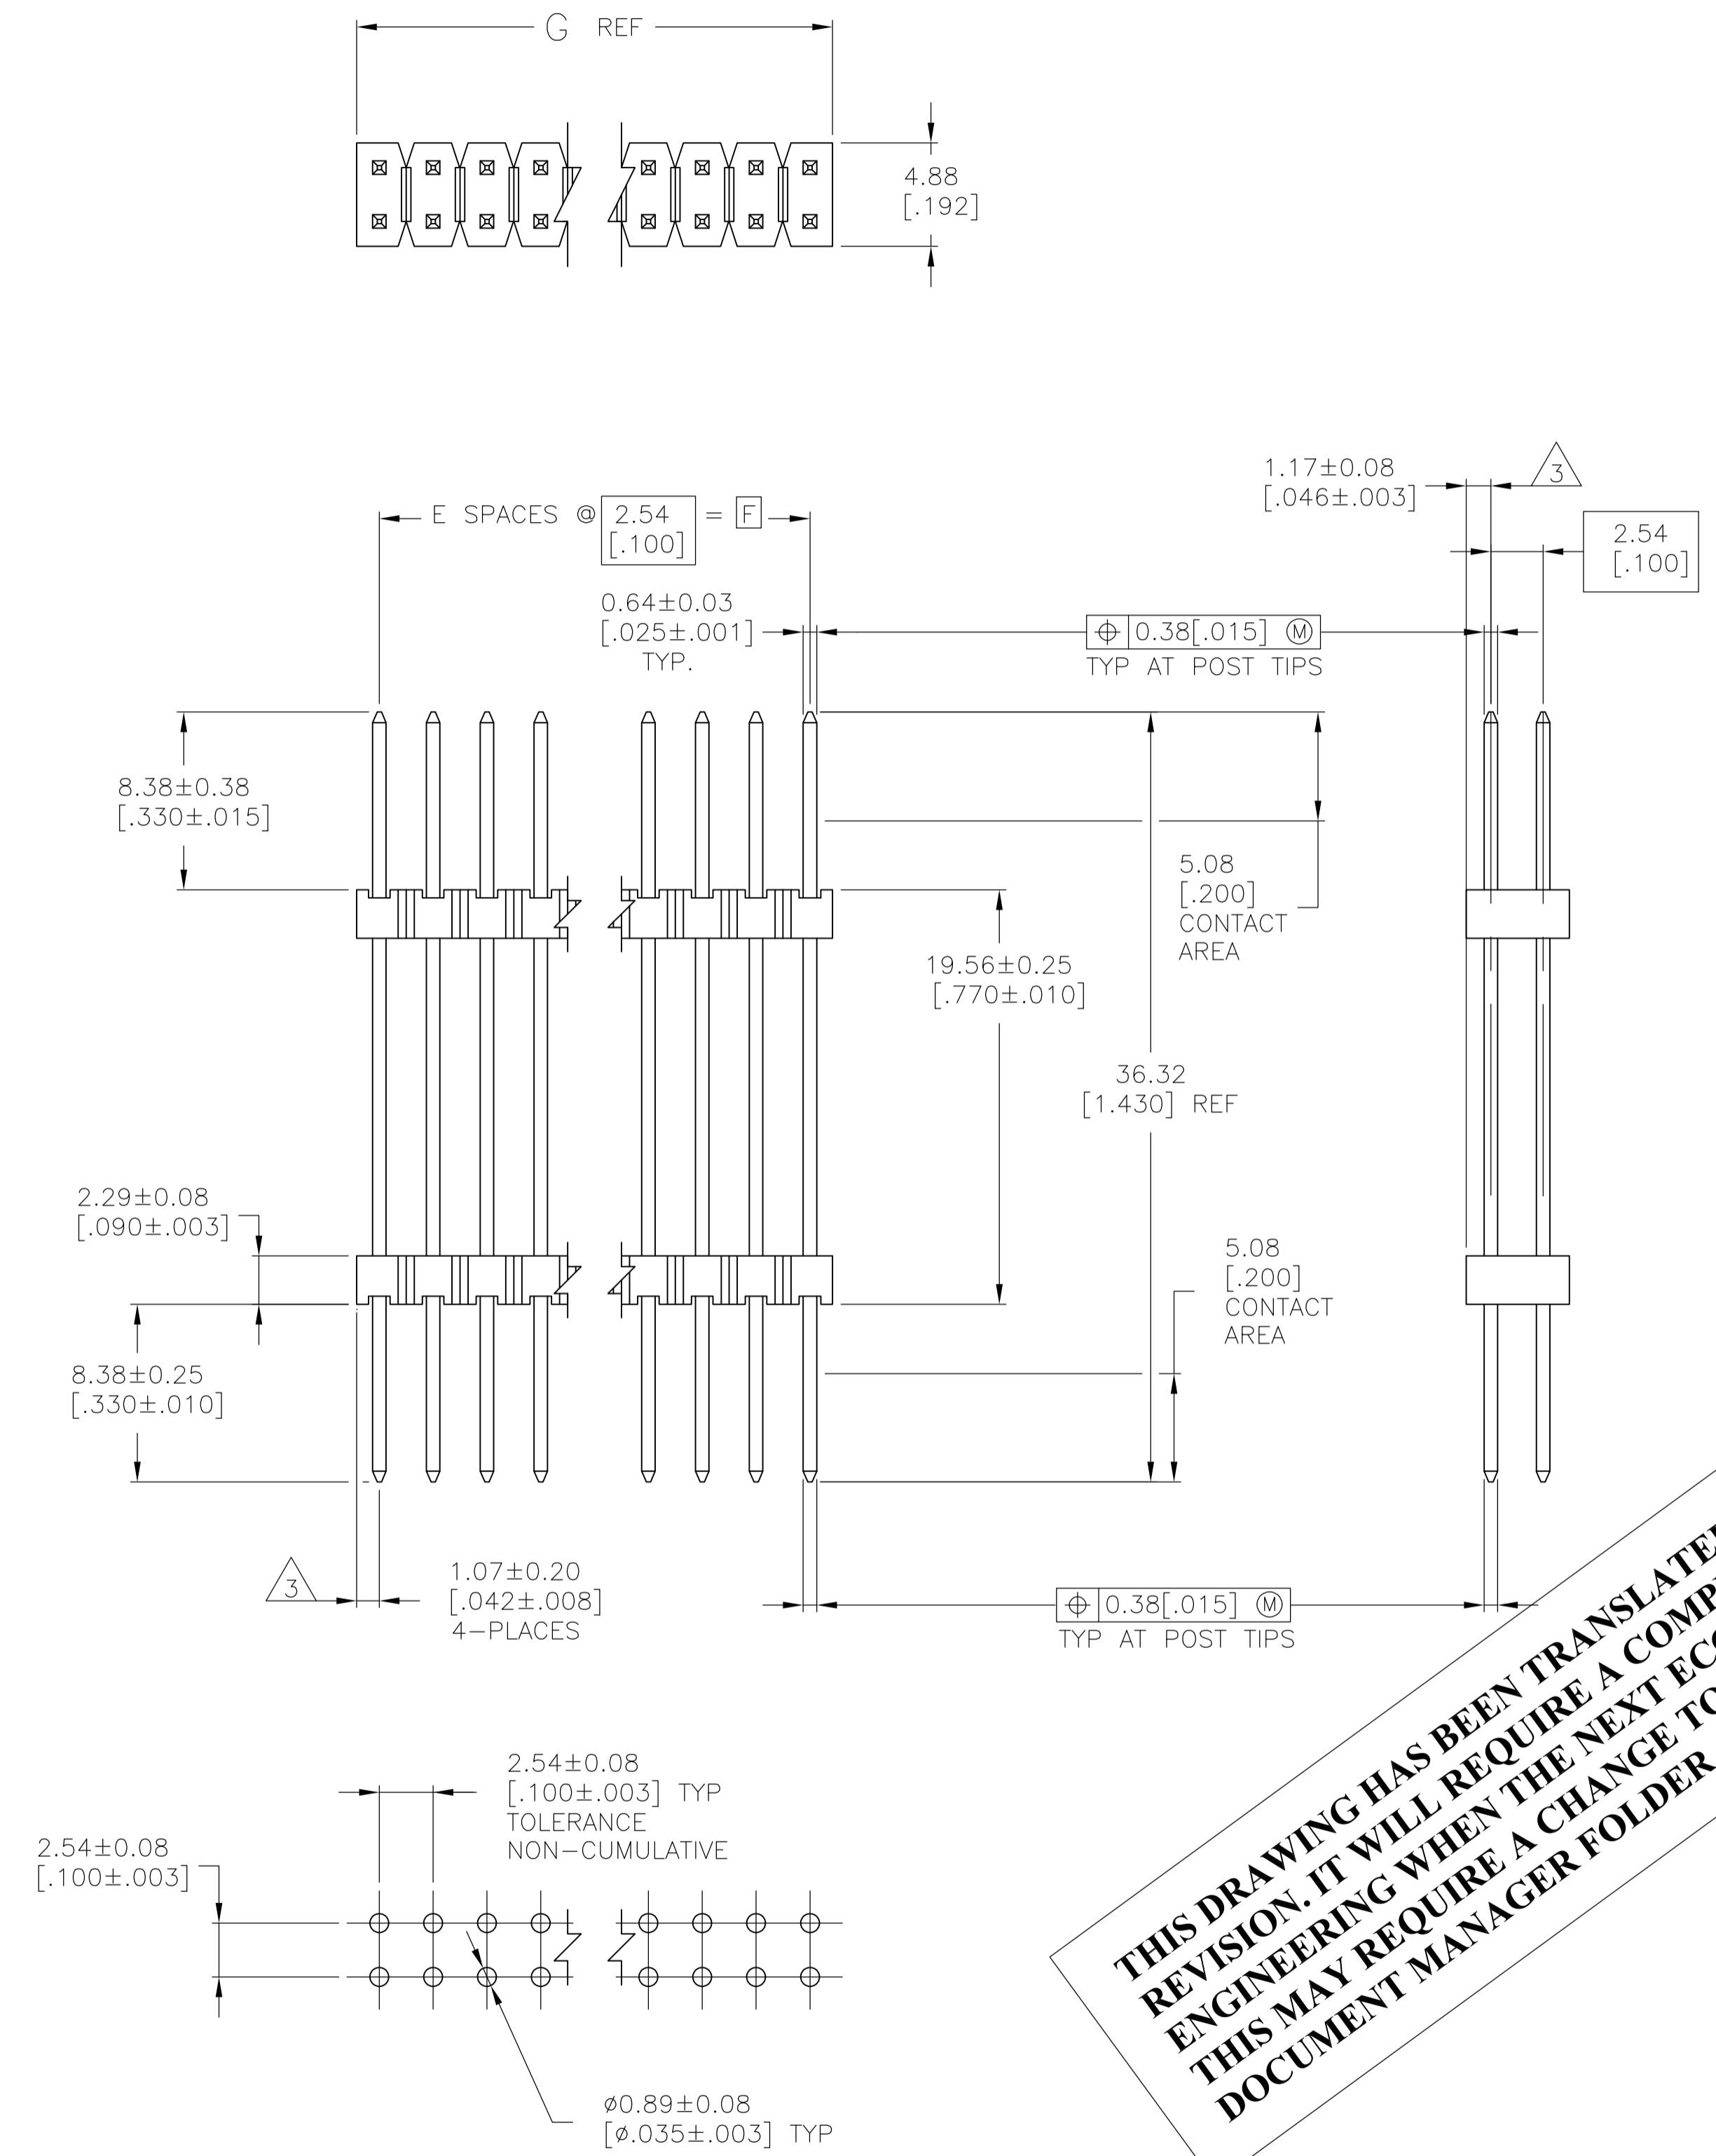

**THIS DRAWING HAS BEEN TRANSLATED AND REFLECTS THE PREVIOUS REVISION. IT WILL REQUIRE A COMPLETE DRAWING CHECK BY PRODUCT ENGINEERING WHEN THE NEXT ECO CHANGE IS WRITTEN - THIS MAY REQUIRE A CHANGE TO THE REVISION OF THE DOCUMENT MANAGER FOLDER AND THIS DRAWING.**

LOC	DIST	REV	DESCRIPTION	DATE	BY	APPROVED
AD	00					
P	REVISED PER	ECO-11-004820		21MAR11	RK	HMR

NO. OF POSITIONS	PART NUMBER
39	4-146510-0
38	3-146510-9
37	3-146510-8
36	3-146510-7
35	3-146510-6
34	3-146510-5
33	3-146510-4
32	3-146510-3
31	3-146510-2
30	3-146510-1
29	3-146510-0
28	2-146510-9
27	2-146510-8
26	2-146510-7
25	2-146510-6
24	2-146510-5
23	2-146510-4
22	2-146510-3
21	2-146510-2
20	2-146510-1
19	2-146510-0
18	1-146510-9
17	1-146510-8
16	1-146510-7
15	1-146510-6
14	1-146510-5
13	1-146510-4
12	1-146510-3
11	1-146510-2
10	1-146510-1
9	1-146510-0
8	146510-9
7	146510-8
6	146510-7
5	146510-6
4	146510-5
3	146510-4
2	146510-3
1	146510-2
2	146510-1

RECOMMENDED HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.51[.02] 3 PLC ± 0.12[.005] 4 PLC ± 0.012[.0005] ANGLES ± -	BRANDBERG 12NOV96 DUBNICZKI 12NOV96 DUBNICZKI 12NOV96 DUBNICZKI 12NOV96	TE Connectivity HEADER ASSEMBLY, MOD II, STACKING, DOUBLE ROW, .025 SQ.POST, UNSHROUDED
MATERIAL: 4	FINISH: 5	WEIGHT: - CUSTOMER DRAWING	SIZE: A1 CASE CODE: 00779 DRAWING NO: 146510 SCALE: 4:1 SHEET: 1 OF 1 REV: P

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)