


REV. B
DCO 300781

TOLERANCES $\pm .010''$ - UNLESS OTHERWISE SPECIFIED

| | |
|-----------------|-------------------------------------|
| COIL: @ 25°C | |
| RESISTANCE | 320 OHMS $\pm 10\%$ |
| NOMINAL VOLTAGE | 28 VDC |
| MUST OPERATE | 13.5 VDC MAX. |
| | TRANSIENT SUPPRESSION - 42 VDC MAX. |
| MUST RELEASE | 5.5 VDC MAX., 2.3 VDC MIN. |

CUSTOMER DATA SHEET

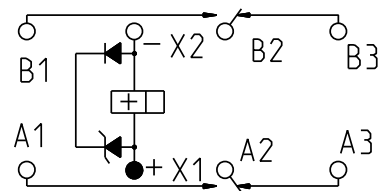

TERMINAL VIEW

| | |
|------------------------------------|---------------------------|
| ENVIRONMENT: | |
| VIBRATION | 10 Hz TO 3000 Hz @ 30 g's |
| SHOCK | 200 g's 6 MS. DURATION |
| TEMPERATURE | -70 °C TO +125 °C |
| NOTES: OPERATE, RELEASE 10 MS MAX. | |
| CONTACT STABILIZATION 2.5 MS MAX. | |
| CONTACT BOUNCE 1 MS MAX. | |
| CONTACT BREAK BOUNCE 0.1 MS MAX. | |

CONTACT RATING: LOW LEVEL
TO 10 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE,
100,000 OPERATIONS

DR. B.D. 05MAR2008 CK. 3/7/08 J.M.B.

Tyco Electronics ©COPYRIGHT 2005
TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

CUST. _____
CUST. NO. M83536/10-026M REV. ---

TE NUMBER
2-1617749-4

CII PART NUMBER
FCA-210-1026M

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)