

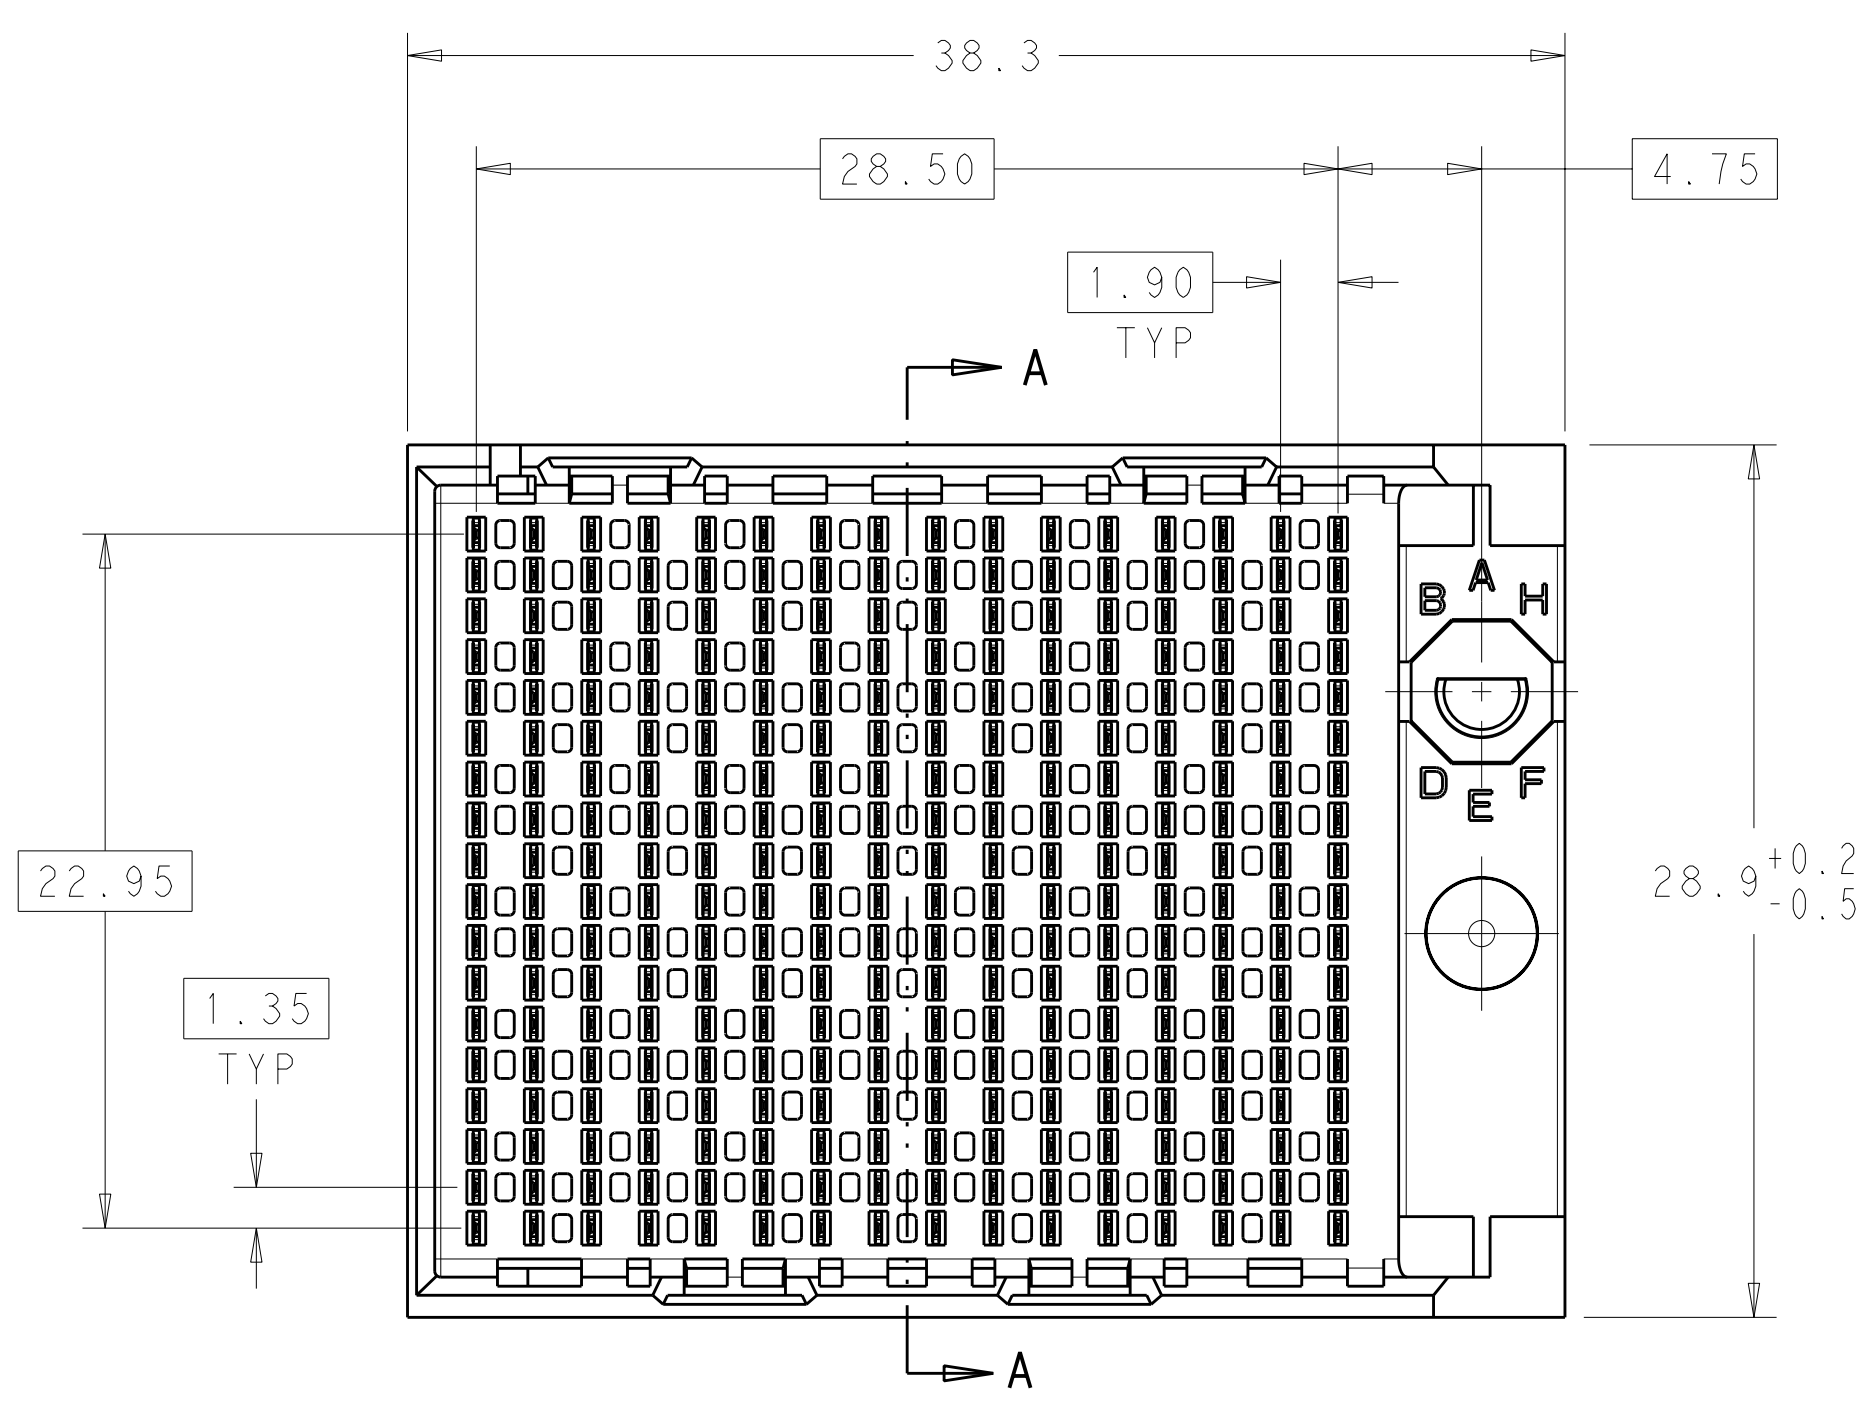




LOC		DIST		REVISIONS			
AD	00	P	LTN	DESCRIPTION	DATE	DWN	APVD
		B		REVISED PER ECO-11-025276	04JAN11	KH	DY

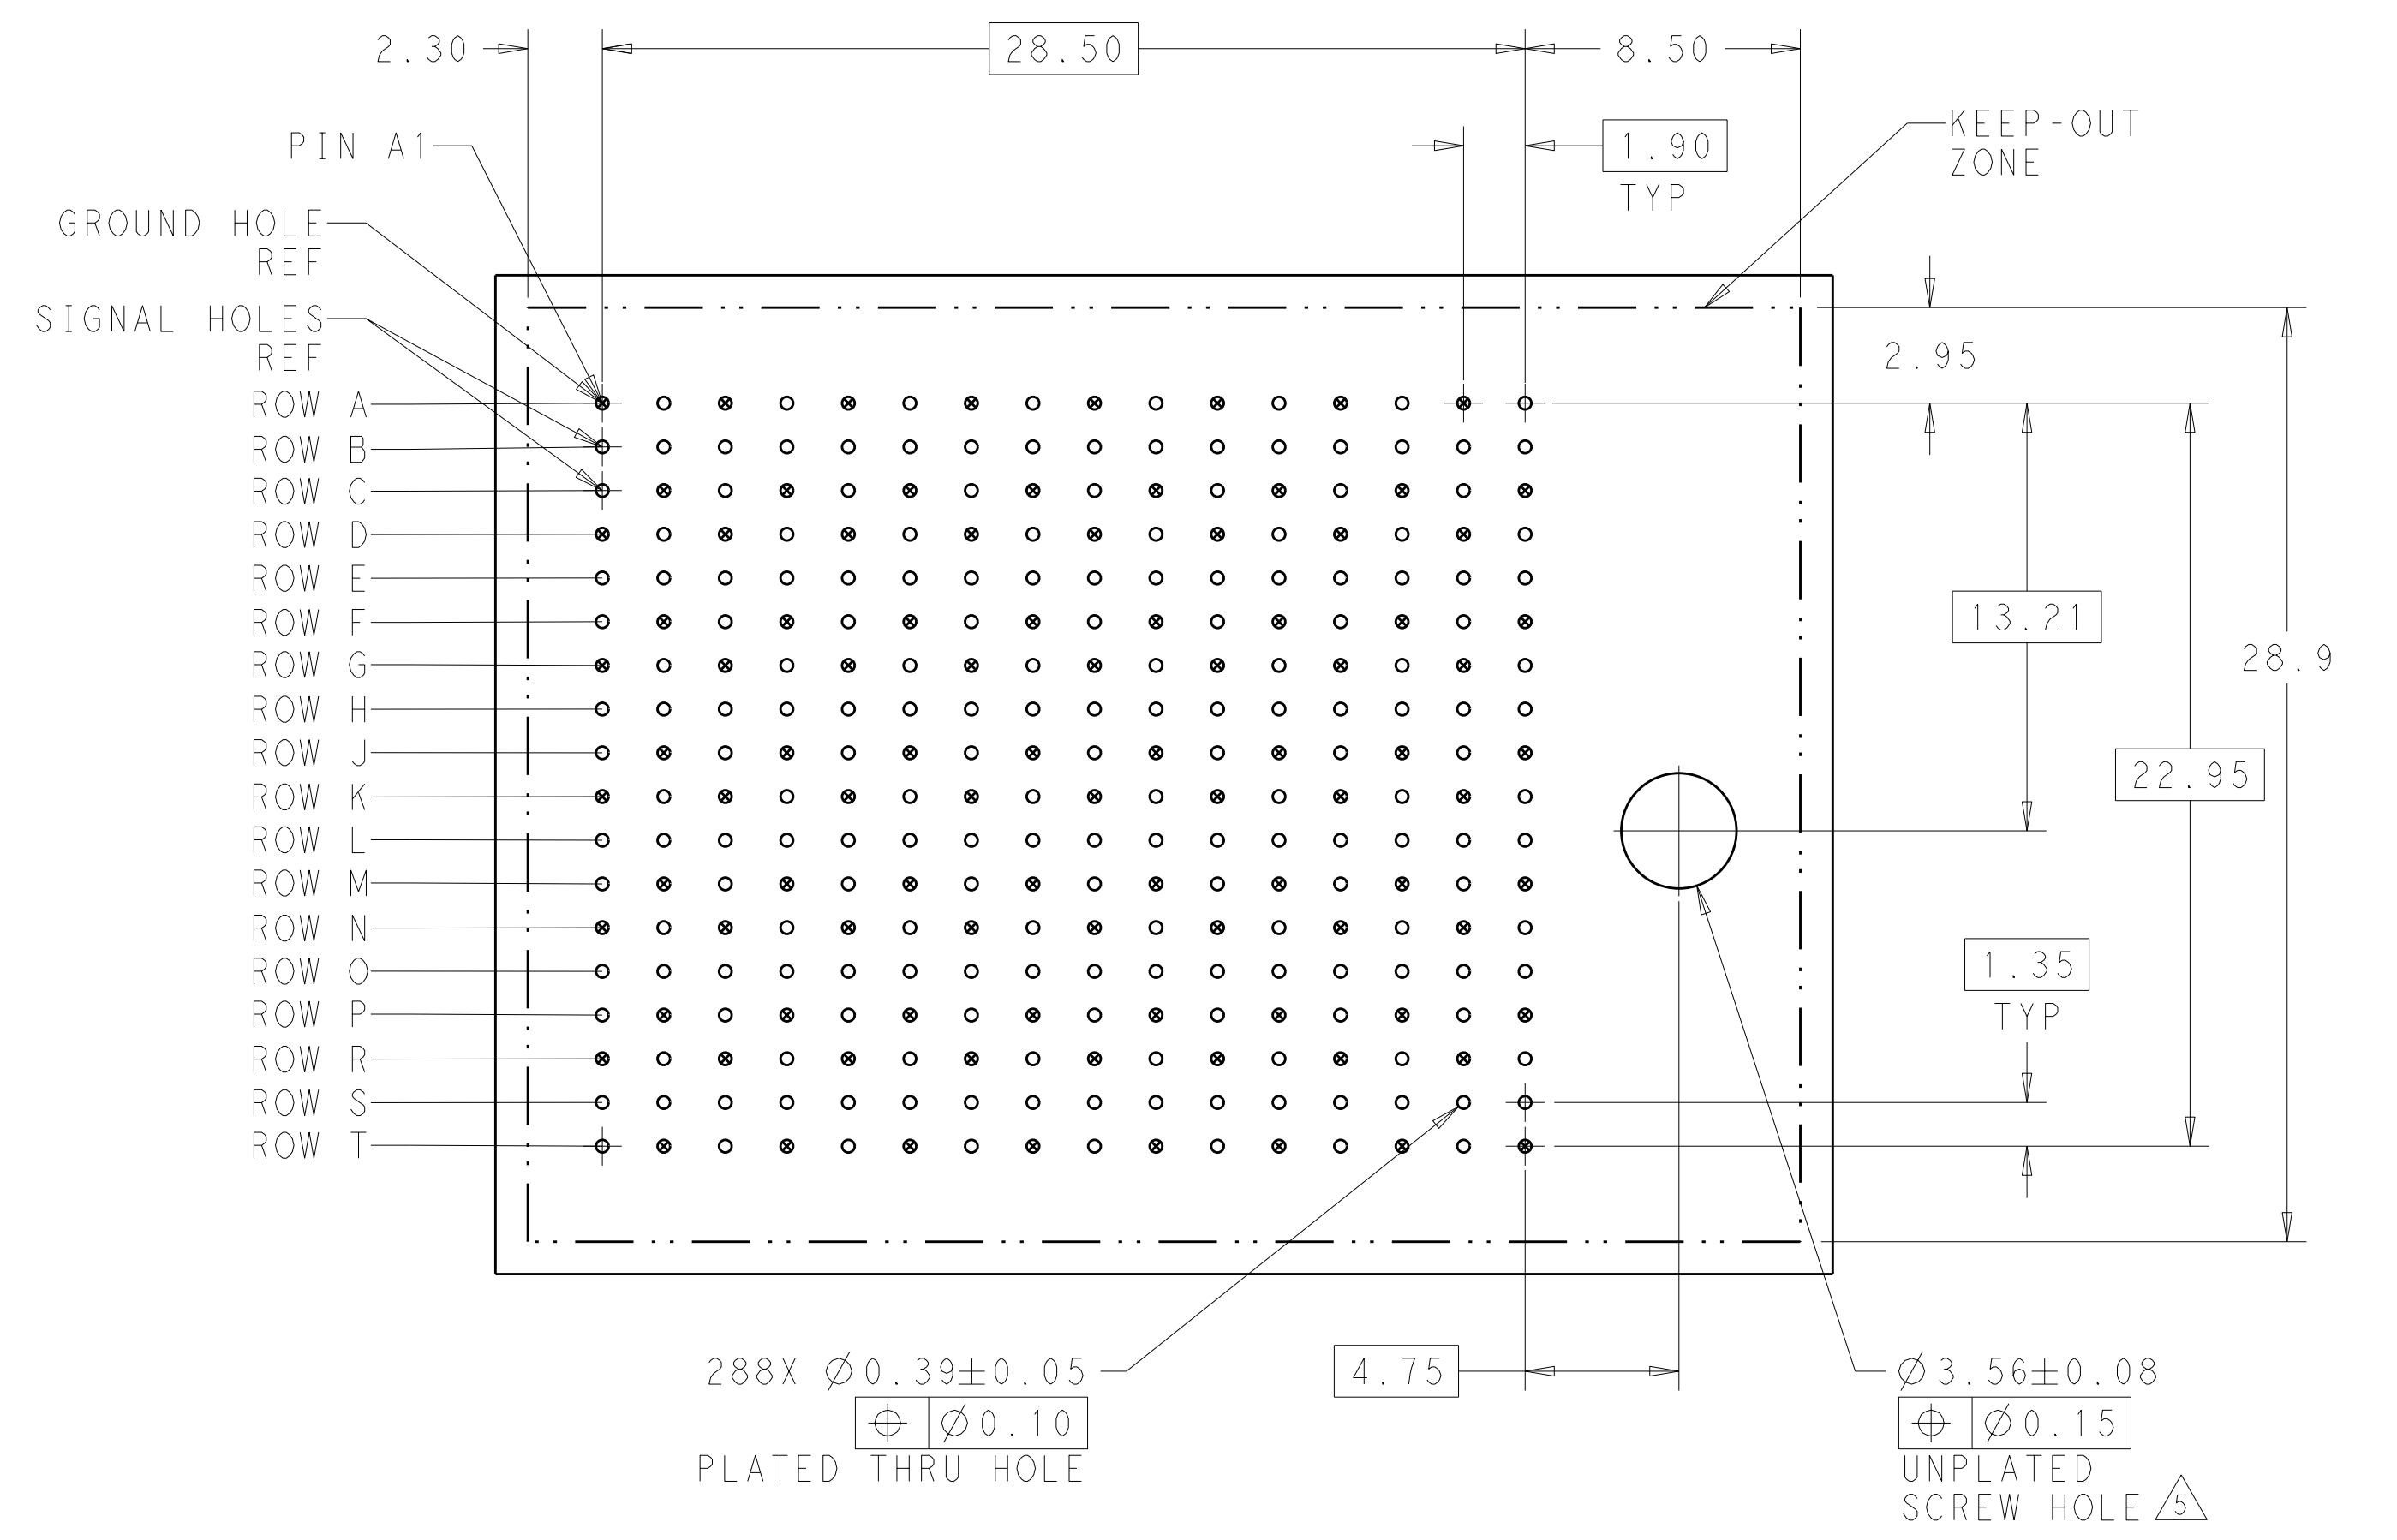

- 1 MATERIAL:  
HOUSING: LCP, GLASS FILLED, UL94V-0.  
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.
- 2 FINISH:  
30µ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN ON PCB TAILS, NICKEL OVERALL.
- 3 FINISH:  
30µ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN-LEAD ON PCB TAILS, NICKEL OVERALL.
- 4. SCREWS PACKAGED IN END OF PACKAGING TUBE.
- 5 FOR GROUNDED GUIDE PIN USE  $\phi 3.56 \pm 0.08$  PTH,  $\phi 3.66$  DRILL, AND  $\phi 6.5$  PAD.
- 6. KEYING PIN SHOWN IN POSITION A, SEE KEYING CHART ON SHEET 2 FOR OTHER POSITIONS.

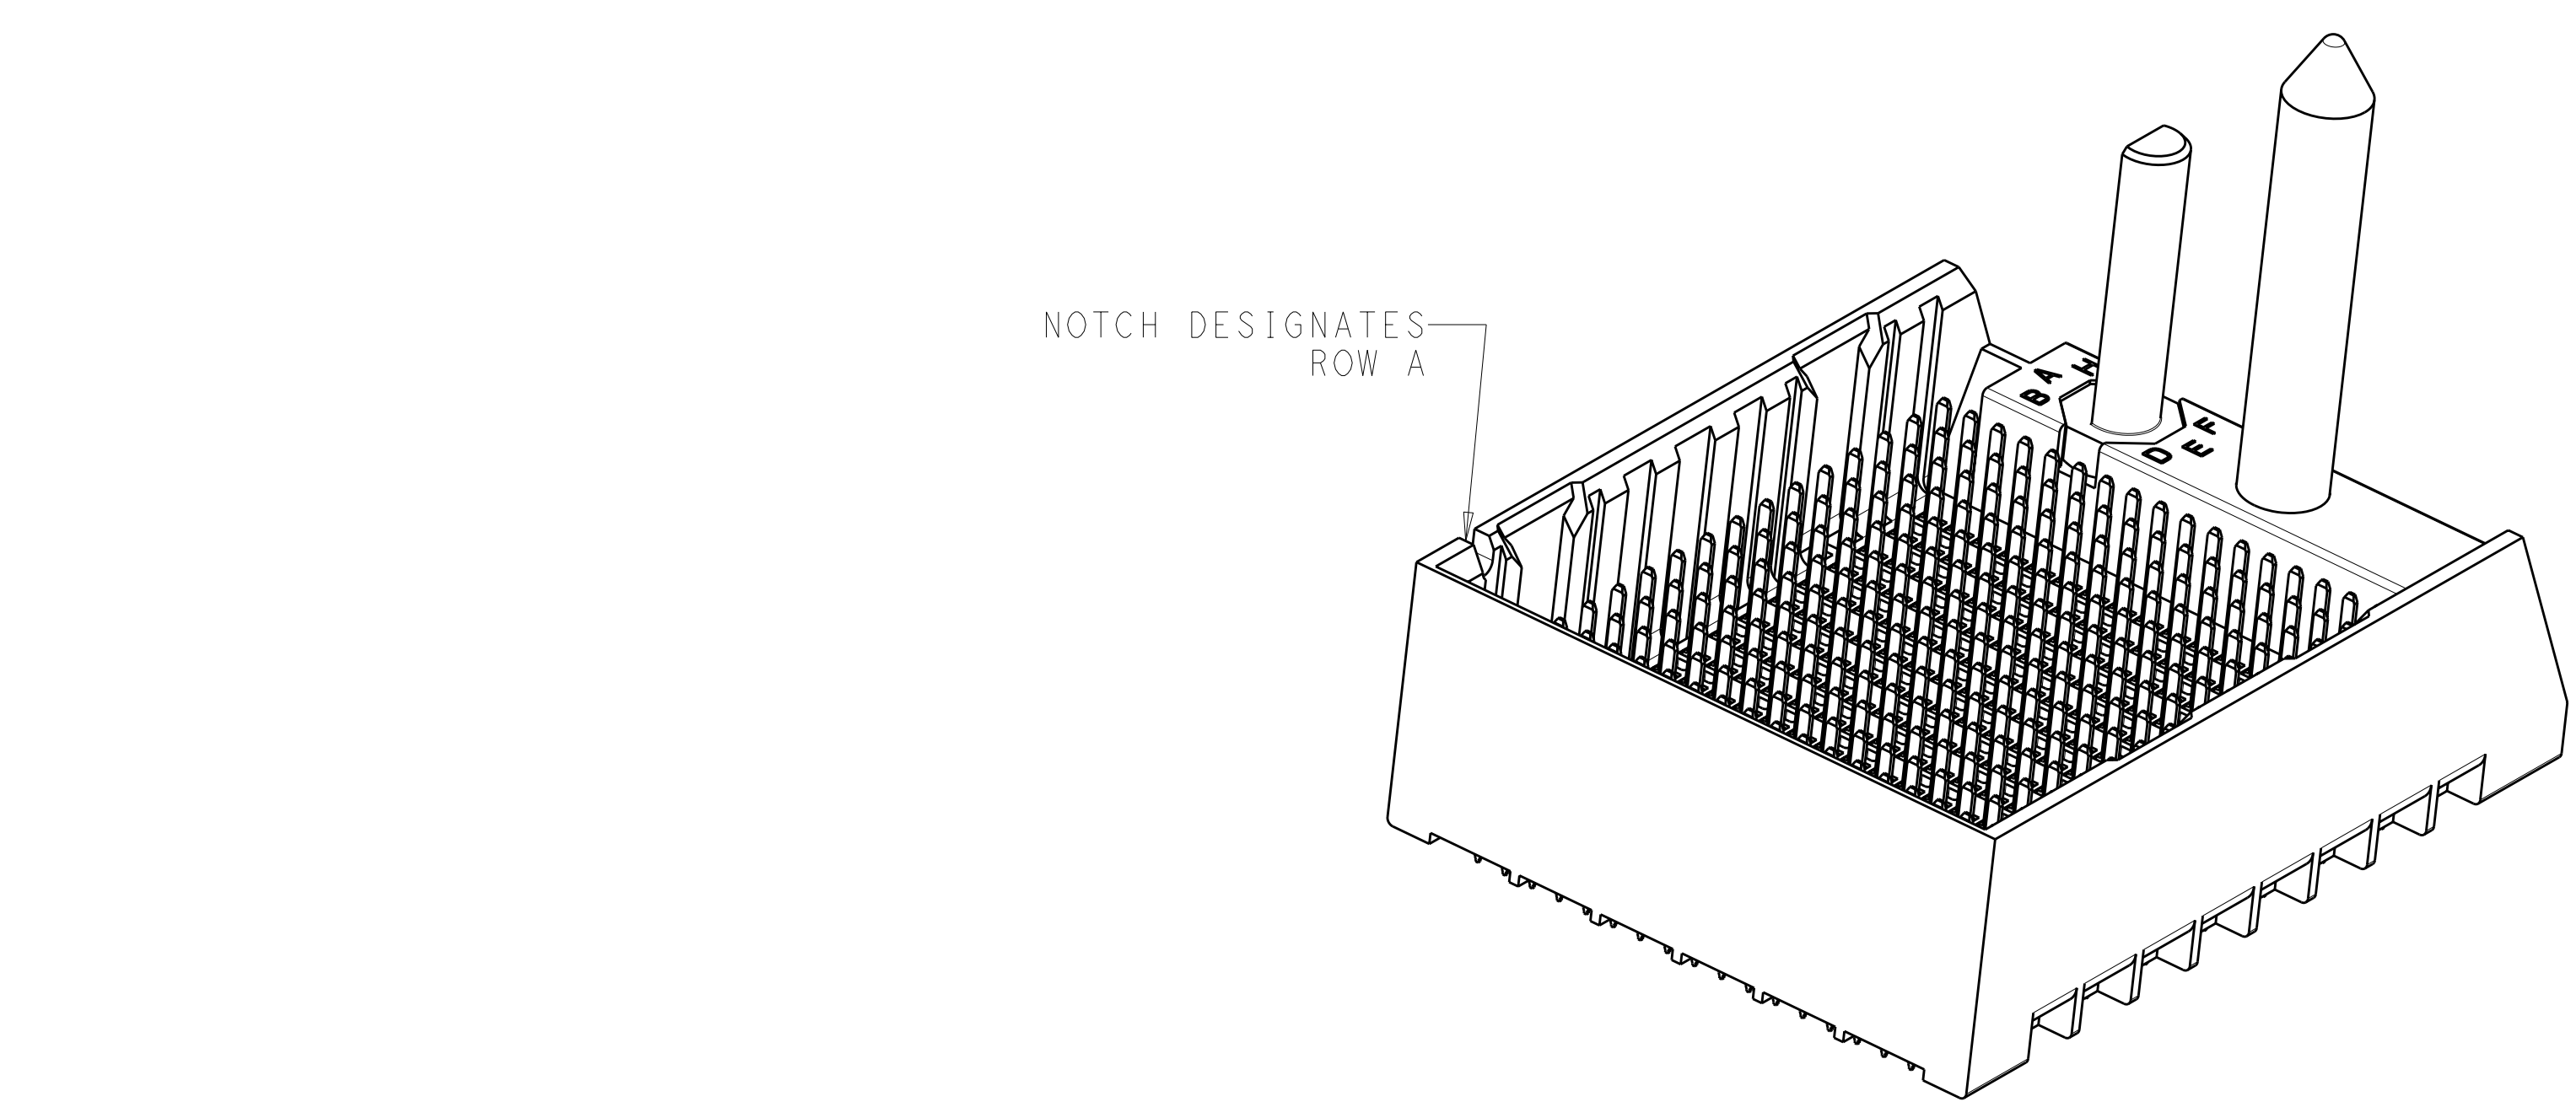


RIGHT GUIDED BACKPLANE HOLE PATTERN (CONNECTOR SIDE)

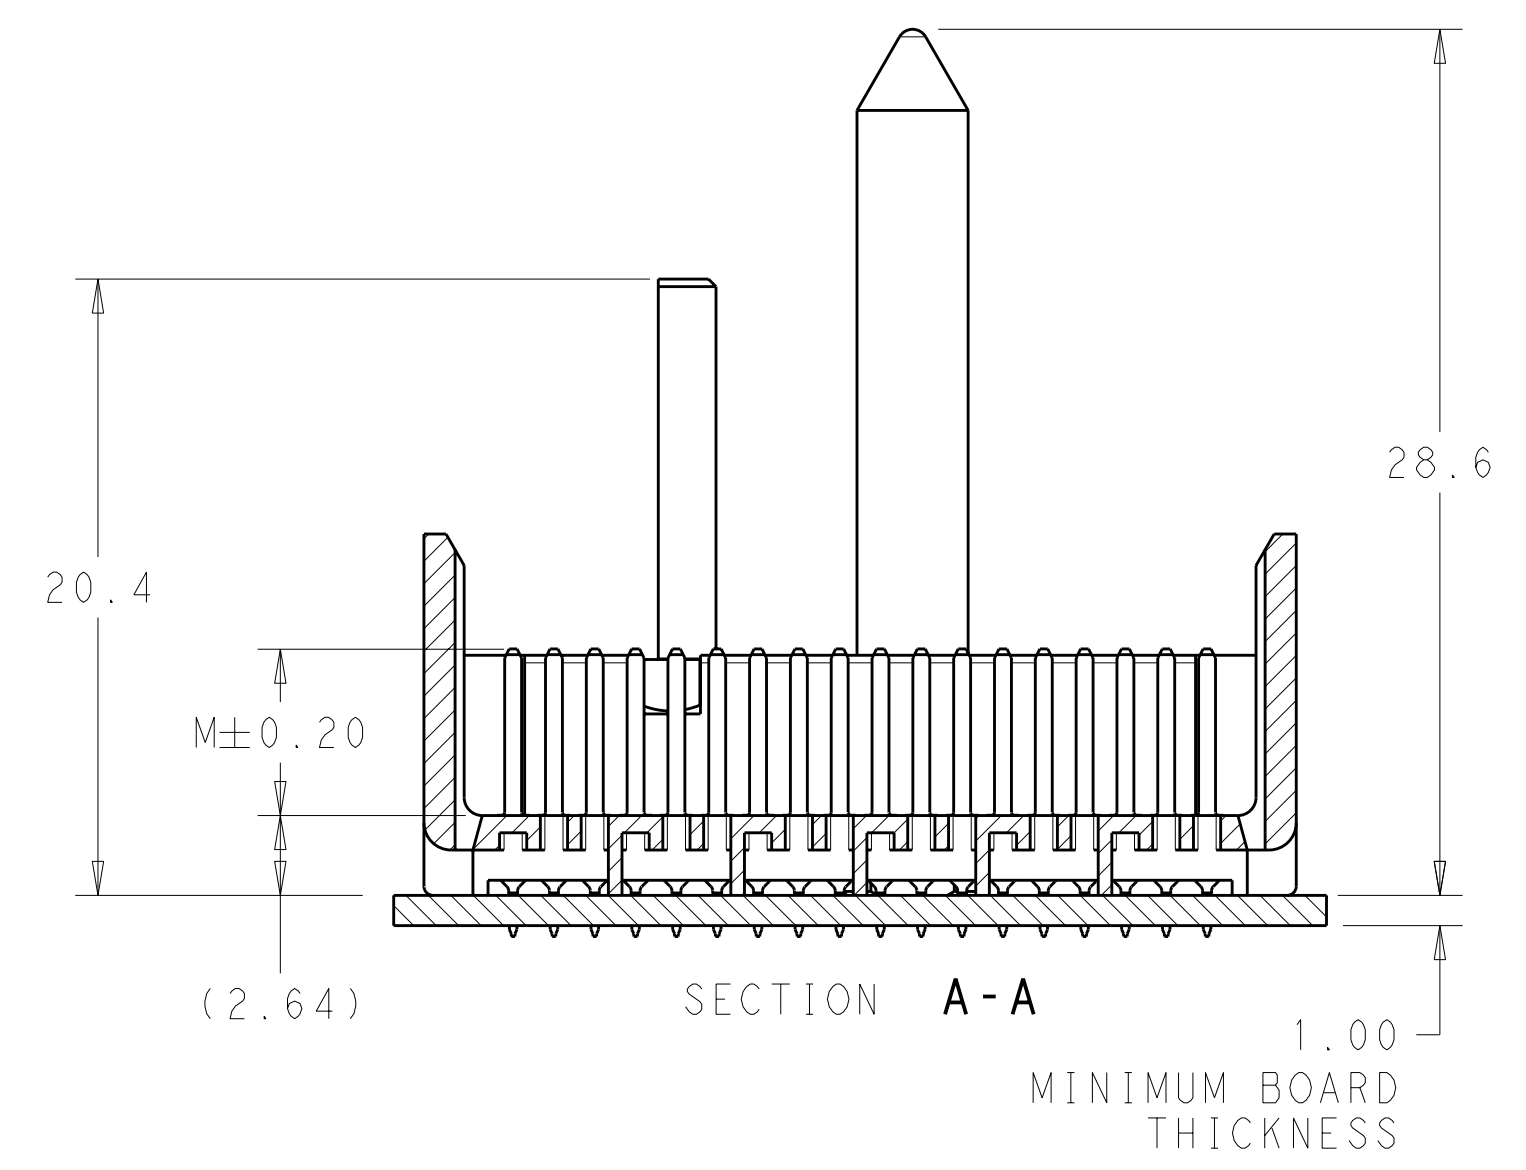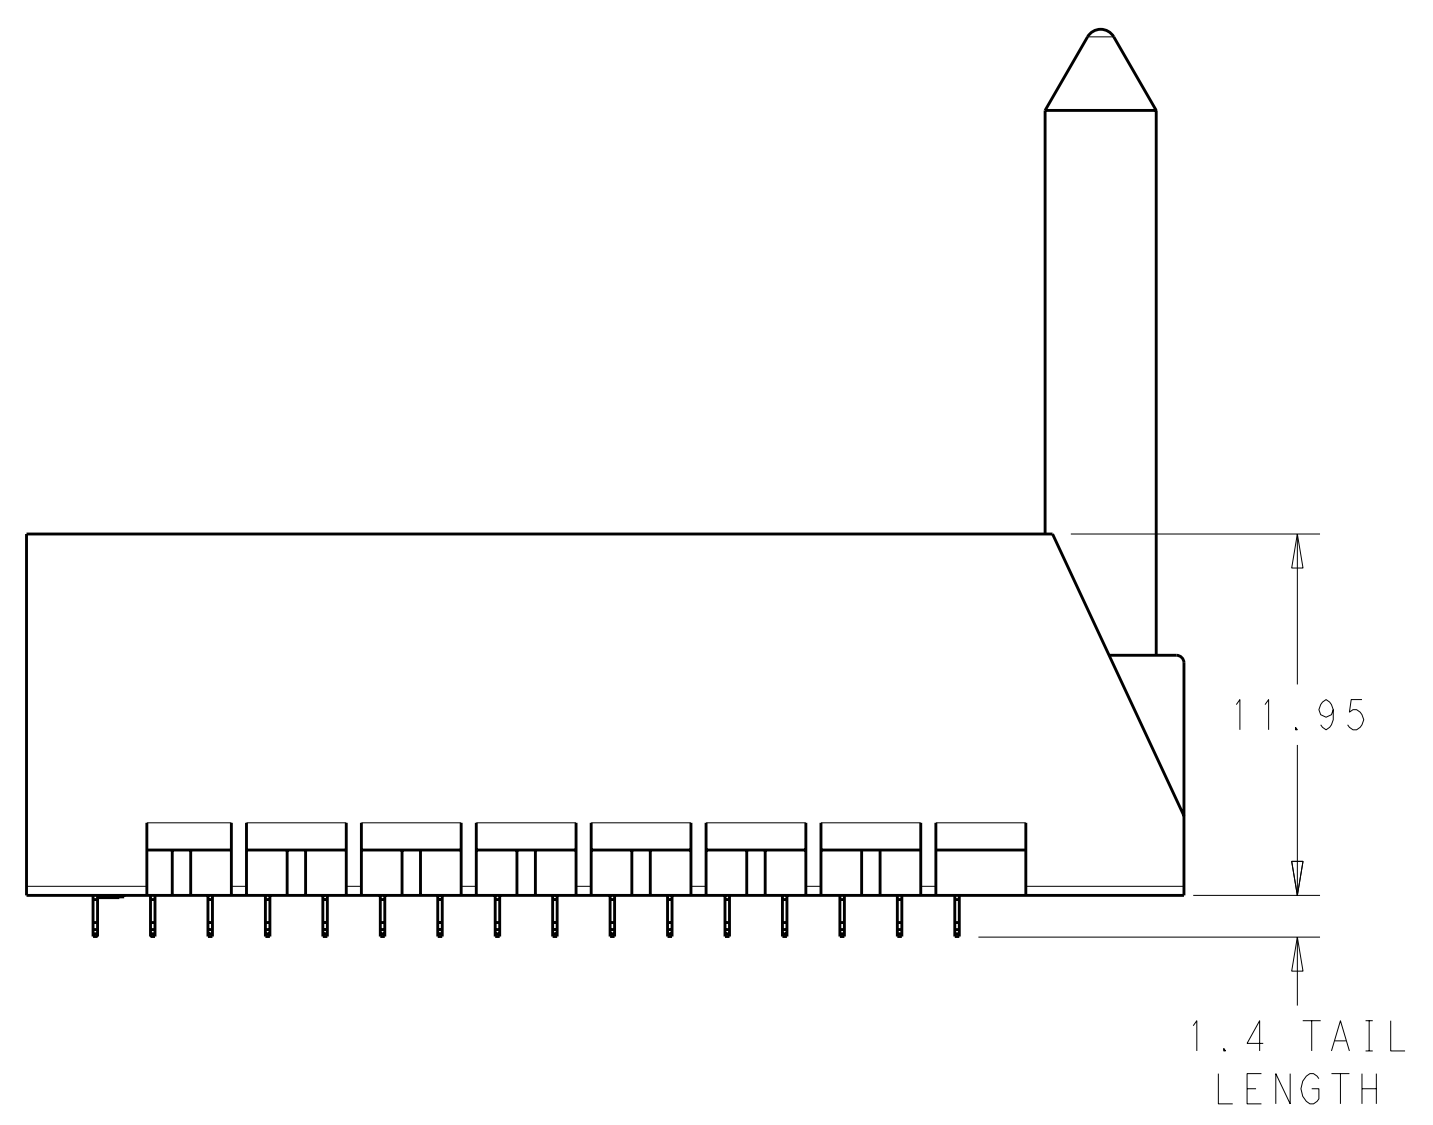

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	J. K. SHOBER	25JAN2011	 TE Connectivity
DIMENSIONS:		CHK	J. EARY	25JAN2011	
mm		APVD	J. EARY	25JAN2011	
0 PLC ± 1 PLC ±0.25 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ±		NAME	IMPACT, 6 PAIR, 16 COLUMN, HEADER RIGHT GUIDED, LEFT END WALL SIGNAL MODULE, 0.39 PTH		
MATERIAL		PRODUCT SPEC	SIZE CAGE CODE DRAWING NO		RESTRICTED TO
FINISH SEE TABLE		APPLICATION SPEC	A1100779C=2007895		
MATERIAL		WEIGHT	CUSTOMER DRAWING		
		SCALE	4:1		SHEET 1 OF 2 REV B

LOC		DIST		REVISIONS			
AD	00	P	LTB	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1			

3	H	5.5	8-2007895-6
3	H	4.9	8-2007895-5
3	H	4.5	8-2007895-4
2	H	5.5	8-2007895-3
2	H	4.9	8-2007895-2
2	H	4.5	8-2007895-1
3	G	5.5	7-2007895-6
3	G	4.9	7-2007895-5
3	G	4.5	7-2007895-4
2	G	5.5	7-2007895-3
2	G	4.9	7-2007895-2
2	G	4.5	7-2007895-1
3	F	5.5	6-2007895-6
3	F	4.9	6-2007895-5
3	F	4.5	6-2007895-4
2	F	5.5	6-2007895-3
2	F	4.9	6-2007895-2
2	F	4.5	6-2007895-1
3	E	5.5	5-2007895-6
3	E	4.9	5-2007895-5
3	E	4.5	5-2007895-4
2	E	5.5	5-2007895-3
2	E	4.9	5-2007895-2
2	E	4.5	5-2007895-1
3	D	5.5	4-2007895-6
3	D	4.9	4-2007895-5
3	D	4.5	4-2007895-4
2	D	5.5	4-2007895-3
2	D	4.9	4-2007895-2
2	D	4.5	4-2007895-1
3	C	5.5	3-2007895-6
3	C	4.9	3-2007895-5
3	C	4.5	3-2007895-4
2	C	5.5	3-2007895-3
2	C	4.9	3-2007895-2
2	C	4.5	3-2007895-1
3	B	5.5	2-2007895-6
3	B	4.9	2-2007895-5
3	B	4.5	2-2007895-4
2	B	5.5	2-2007895-3
2	B	4.9	2-2007895-2
2	B	4.5	2-2007895-1
3	A	5.5	1-2007895-6
3	A	4.9	1-2007895-5
3	A	4.5	1-2007895-4
2	A	5.5	1-2007895-3
2	A	4.9	1-2007895-2
2	A	4.5	1-2007895-1
3	-	5.5	2007895-6
3	-	4.9	2007895-5
3	-	4.5	2007895-4
2	-	5.5	2007895-3
2	-	4.9	2007895-2
2	-	4.5	2007895-1
FINISH	KEY POSITION	DIM M	PART NUMBER

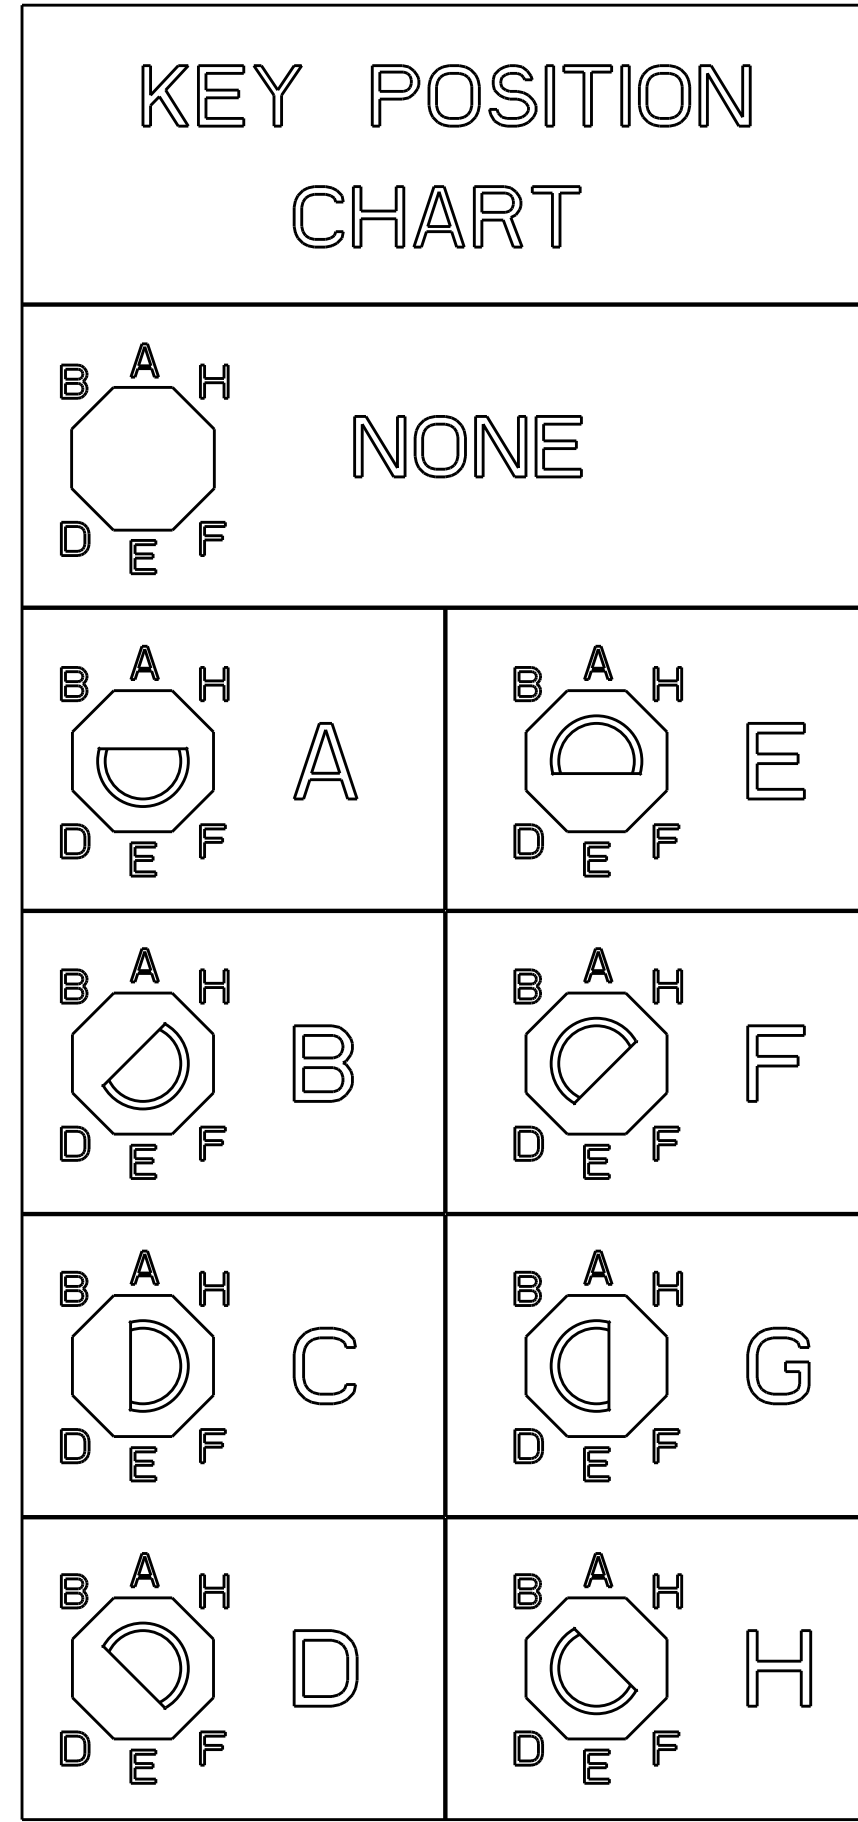

REFER TO WWW.TE.COM  
FOR PRODUCT AVAILABILITY

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. K. SHOBER 25JAN2011	<b>STE</b> TE Connectivity
DIMENSIONS: mm		CHK J. EARY 25JAN2011	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. EARY 25JAN2011	NAME: IMPACT, 6 PAIR, 16 COLUMN, HEADER RIGHT GUIDED, LEFT END WALL SIGNAL MODULE, 0.39 PTH
9 PLC ±0.25		PRODUCT SPEC	
3 PLC ±0.13		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO
5 PLC ±		WEIGHT	A100779C=2007895
4 PLC ±		CUSTOMER DRAWING	SCALE 5:1 SHEET 2 OF 2 REV B
ANGLES ±			
FINISH SEE TABLE			

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)