
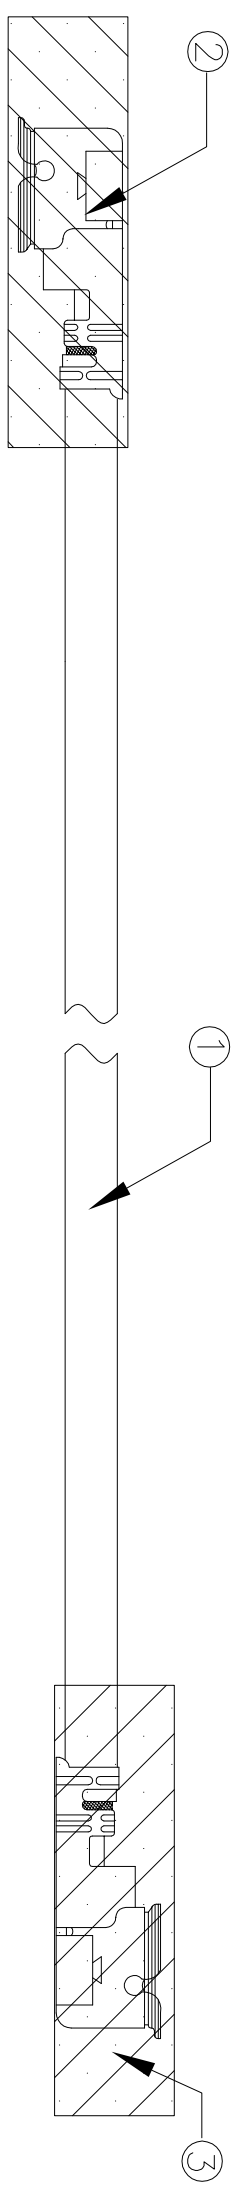


LOC	DIST	REVISONS	
GP	00	P	LTR
		A	NEW RELEASE
		DATE	DWN
		12FEB09	CP
			LZ

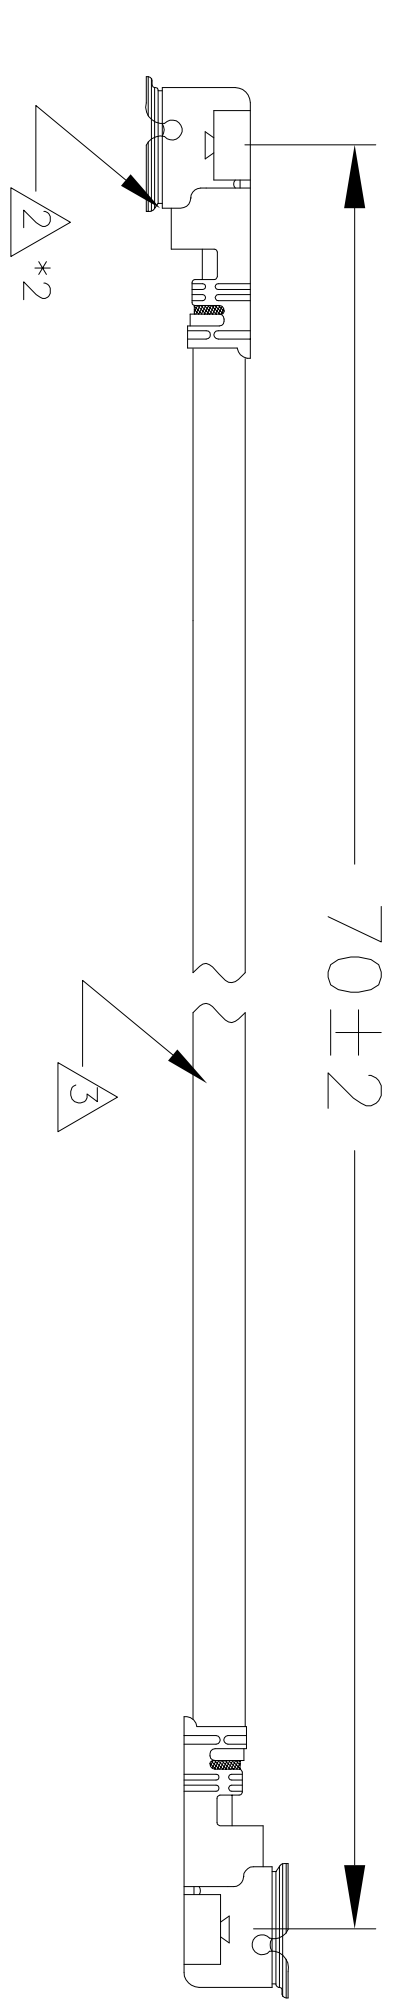


- NOTES:
- CABLE ASSEMBLY TO BE 100% TESTED FOR OPENS, SHORTS AND CONTINUITY
 HI-POT: 200 VDC FOR 100MS
 INSULATION RESISTANCE: 50M OHMS MIN
 CONTINUITY RESISTANCE: 2 OHMS MAX
 FREQUENCY RANGE: DC TO 6 GHZ
 VSWR: 1.5:1 MAX
 - CONNECTOR: TYPE III U.FL
 SUPPLIER: I-PEX 20278-112R-13
 - CABLE: 1.13MM OD, JACKET GRAY, 50 OHMS FEP INSULATED
 SUPPLIER: GBE OR TE ENGINEERING APPROVED SUPPLIER
 - TWO END U.FL CONNECTORS IN 180 DEGREE DIFFERENCE POSITION
 - PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF
 TYCO ELECTRONICS STANDARD 230-702

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	12FEB09	Chen Ping
CHK	12FEB09	Andrew Dong
APVD	12FEB09	Lucky Zhang
PRODUCT SPEC		
APPLICATION SPEC		
WEIGHT		

DIMENSIONS:
mm [INCHES]

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±
FINISH	



SIZE	A3
CAGE CODE	00779
DRAWING NO	1513288
SCALE	N.T.S.
SHEET	1 OF 1
REV	A

NAME	FWT3 Ericsson UMTS/Aux cable assembly
DESCRIPTION	Gray, 70mm, 180degree
DESCRIPTION	
ITEM	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)