


REVISIONS			DATE	APPROVED
ZONE	LTR	DESCRIPTION	1/24/80	<i>Blair</i>
	C	CHANGE PER DCO 01075		

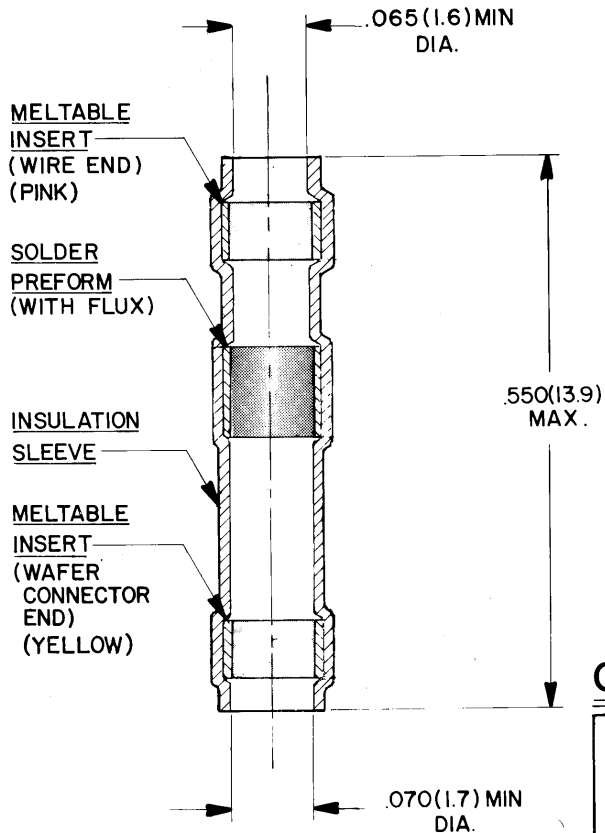

NOTES :

1. MATERIALS

- I-A INSULATION SLEEVE; HEAT SHRINKABLE, RADIATION CROSSLINKED MODIFIED POLYVINYLIDENE FLUORIDE, TRANSPARENT BLUE.
- I-B SOLDER PREFORM; SOLDER PREFORM WITH FLUX TYPE: Sb5 SRAP PER QQ-S-571.
- I-C MELTABLE INSERTS; LOW OUTGASSING IMMERSION RESISTANT THERMOPLASTIC

2. THIS SLEEVE IS DESIGNED TO ATTACH 20 THROUGH 26 GAUGE TIN PLATED OR SILVER PLATED CONDUCTORS TO THE TERMINALS OF A **Raychem** MTC100 SERIES WAFER.

© Raychem Corporation 1979

## CONNECTOR SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES BRACKETED DIMENSIONS ( ) ARE METRIC AND TOLERANCES ARE:  .XXX: ± ( M.M. ) .XX: ± ( M.M. ) Δ: ±	DRAWN	SA. LOPEZ	5-7-79	<b>Raychem</b> <small>RAYCHEM CORPORATION          300 CONSTITUTION DRIVE          MENLO PARK, CALIFORNIA 94025</small>
	CHECKED	<i>Ph</i>		
	APPROVED	<i>Blair</i>	5-7-79	TITLE
	APPROVED	<i>E. Steiner</i>	5-7-79	SOLDER SLEEVE WIRE TERMINATOR DOUBLE SEAL FOR TEMP RATING 150°C(Sb5)MTC100 SERIES
	APPROVED	<i>Steiner</i>	5-7-79	SIZE
			<b>B</b>	CODE IDENT
				NO. 06090
				DWG. NO.
				CTA-0025
				WEIGHT
				SHEET 1 OF 1
	PROJECT	6448-7055		

If this document is printed it becomes uncontrolled.  
Check with the web for latest revision.

DO NOT SCALE THIS DRAWING

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)