



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By TE CONNECTIVITY ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
D2		REACTIVATE & REMOVE ALUMINIUM WIRE RANGE	23JUN17	SV PK5

IDENTIFICATION NUMBER 15 FOR MAGNET WIRE RANGE

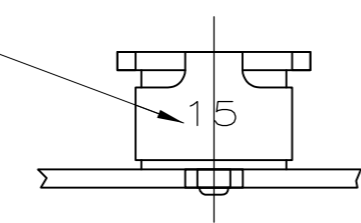

- 1 CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 5.59 [.220] CENTERS.
- 2 SLOT TERMINATES A SINGLE COPPER MAGNET WIRE ONLY. COPPER RANGE: 0.64-0.81mm [#22-#20] AWG.
- 3 TIN OVER NICKEL UNDERPLATE

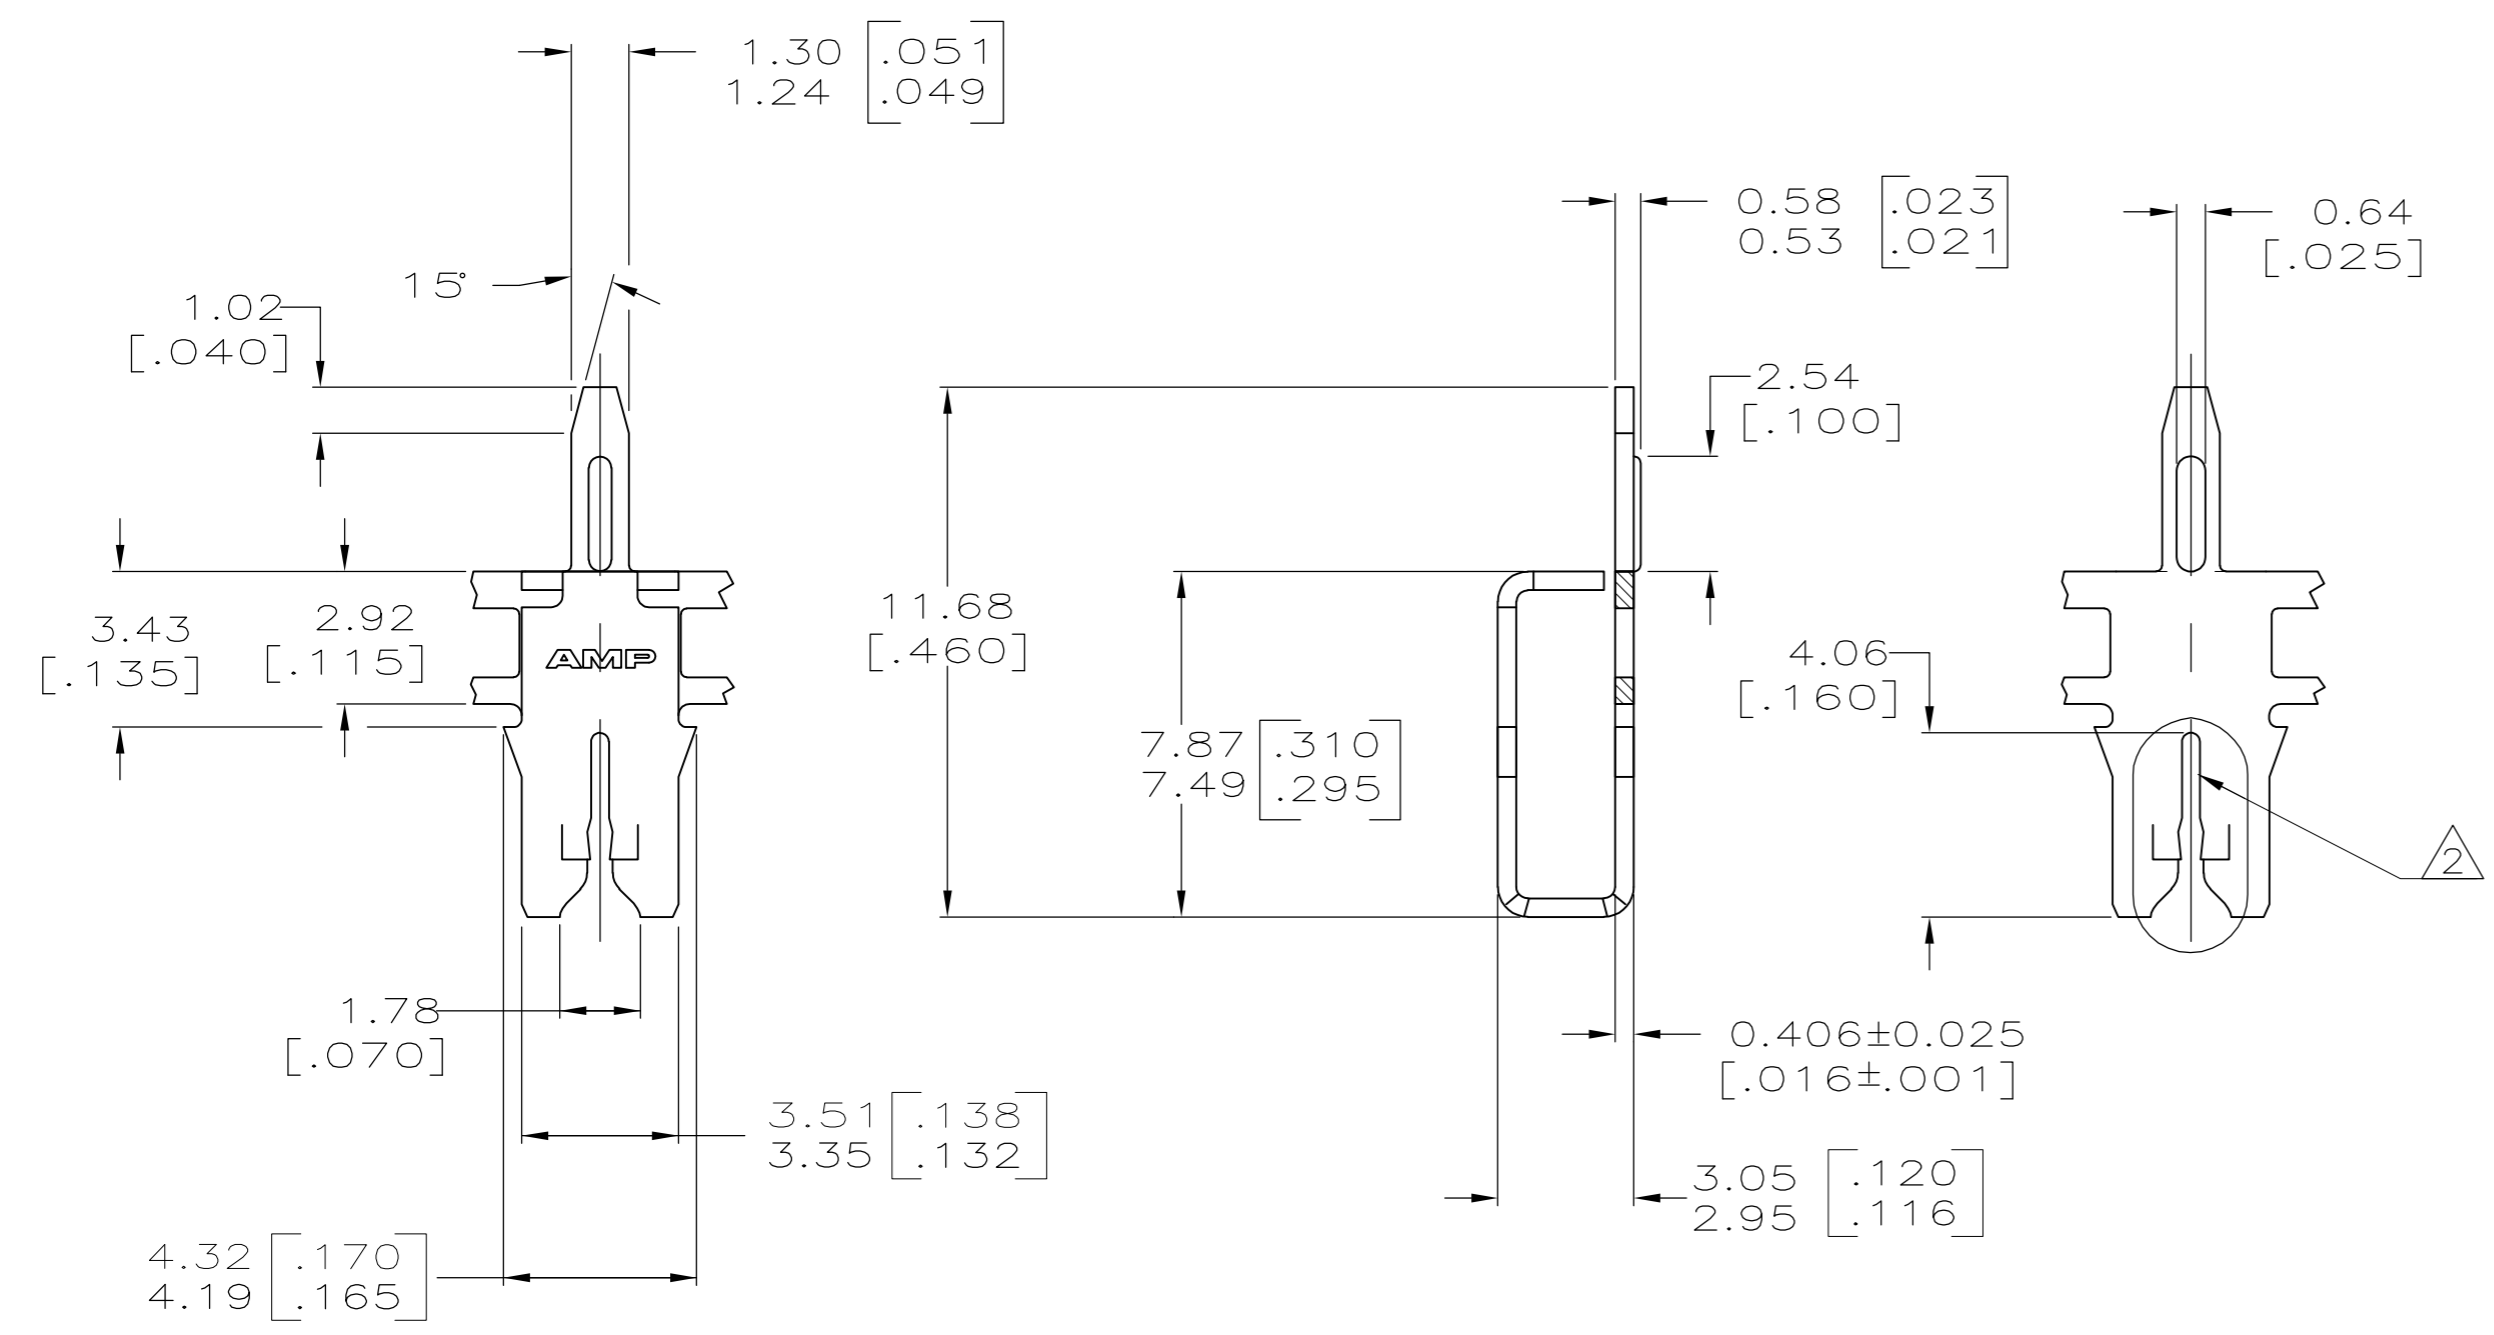

63660-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN MICHAEL S. FEHER 8/14/92		
DIMENSIONS: INCHES		CHK PHILLIP M. FORTNEY 8/18/9		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD -	NAME POST, SOLDER, MAG-MATE	
0 PLC ± - 1 PLC ± - 2 PLC ± 0.25 [.010] 3 PLC ± - 4 PLC ± - ANGLES ± 1°		PRODUCT SPEC 108-2012	SIZE A2	
MATERIAL 4M BRASS		APPLICATION SPEC 114-2046	CAGE CODE 00779	DRAWING NO 63660
FINISH - 3		WEIGHT	RESTRICTED TO -	SCALE 6:1
CUSTOMER DRAWING			SHEET 1 of 1	REV D2

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)