

Modification To A Standard Part

Modification Part Number 222D921 - X - G05

Modification Description (in words)

TRIMMED VARIANT AT J

Dimensions:-

P	JO
+/-10%	+/-10%
b	b
35	13

All Other Dimensions Conform To Standard Product . . .222D921

Copy Of Standard Product S.C.D. Available On Request

*Special Notes***Copyright(!)
Urheberrechte**

The copyright in this drawing is the property of Raychem Ltd. The drawing is issued on condition that it is not copied, reproduced, or disclosed to a third party, either in whole or in part without the prior written consent of Raychem Ltd.

Drawn J. Haydon Checked *AK* Issue 1 Date November 1986Approval
Design*[Signature]*


MKTG

[Signature]

Q.C.

*[Signature]*Conforms to ISO Recommendations
3rd Angle Projection
Not to scale

Ordering Information

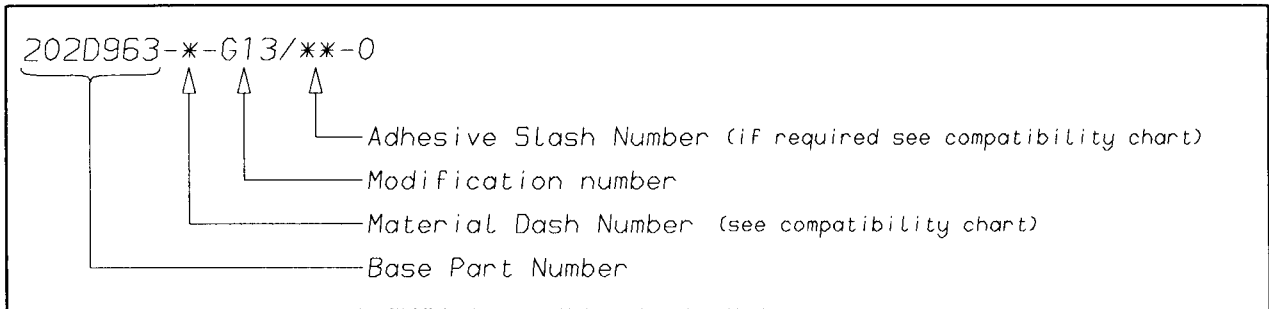

COMPATIBILITY CHART

MATERIAL DASH NUMBER	MATERIAL DESCRIPTION	COATING SLASH NUMBER
-3	POLYOLEFIN, SEMI-RIGID	/42, /86
-4	POLYOLEFIN, FLEXIBLE	/42, /86
-25	ELASTOMER, FLUID RESISTANT	/86, /225

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

Raychem
 Electronics OEM Division Europe
 Swindon, Wiltshire, England.
 Telephone: (01793) 528171 Fax: 573923

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)