



LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
L		EC 0G3C-0771 04	28DEC04	BSV	JLG
L1		REVISED PER ECO-09-020689	01SEP09	KK	AEG

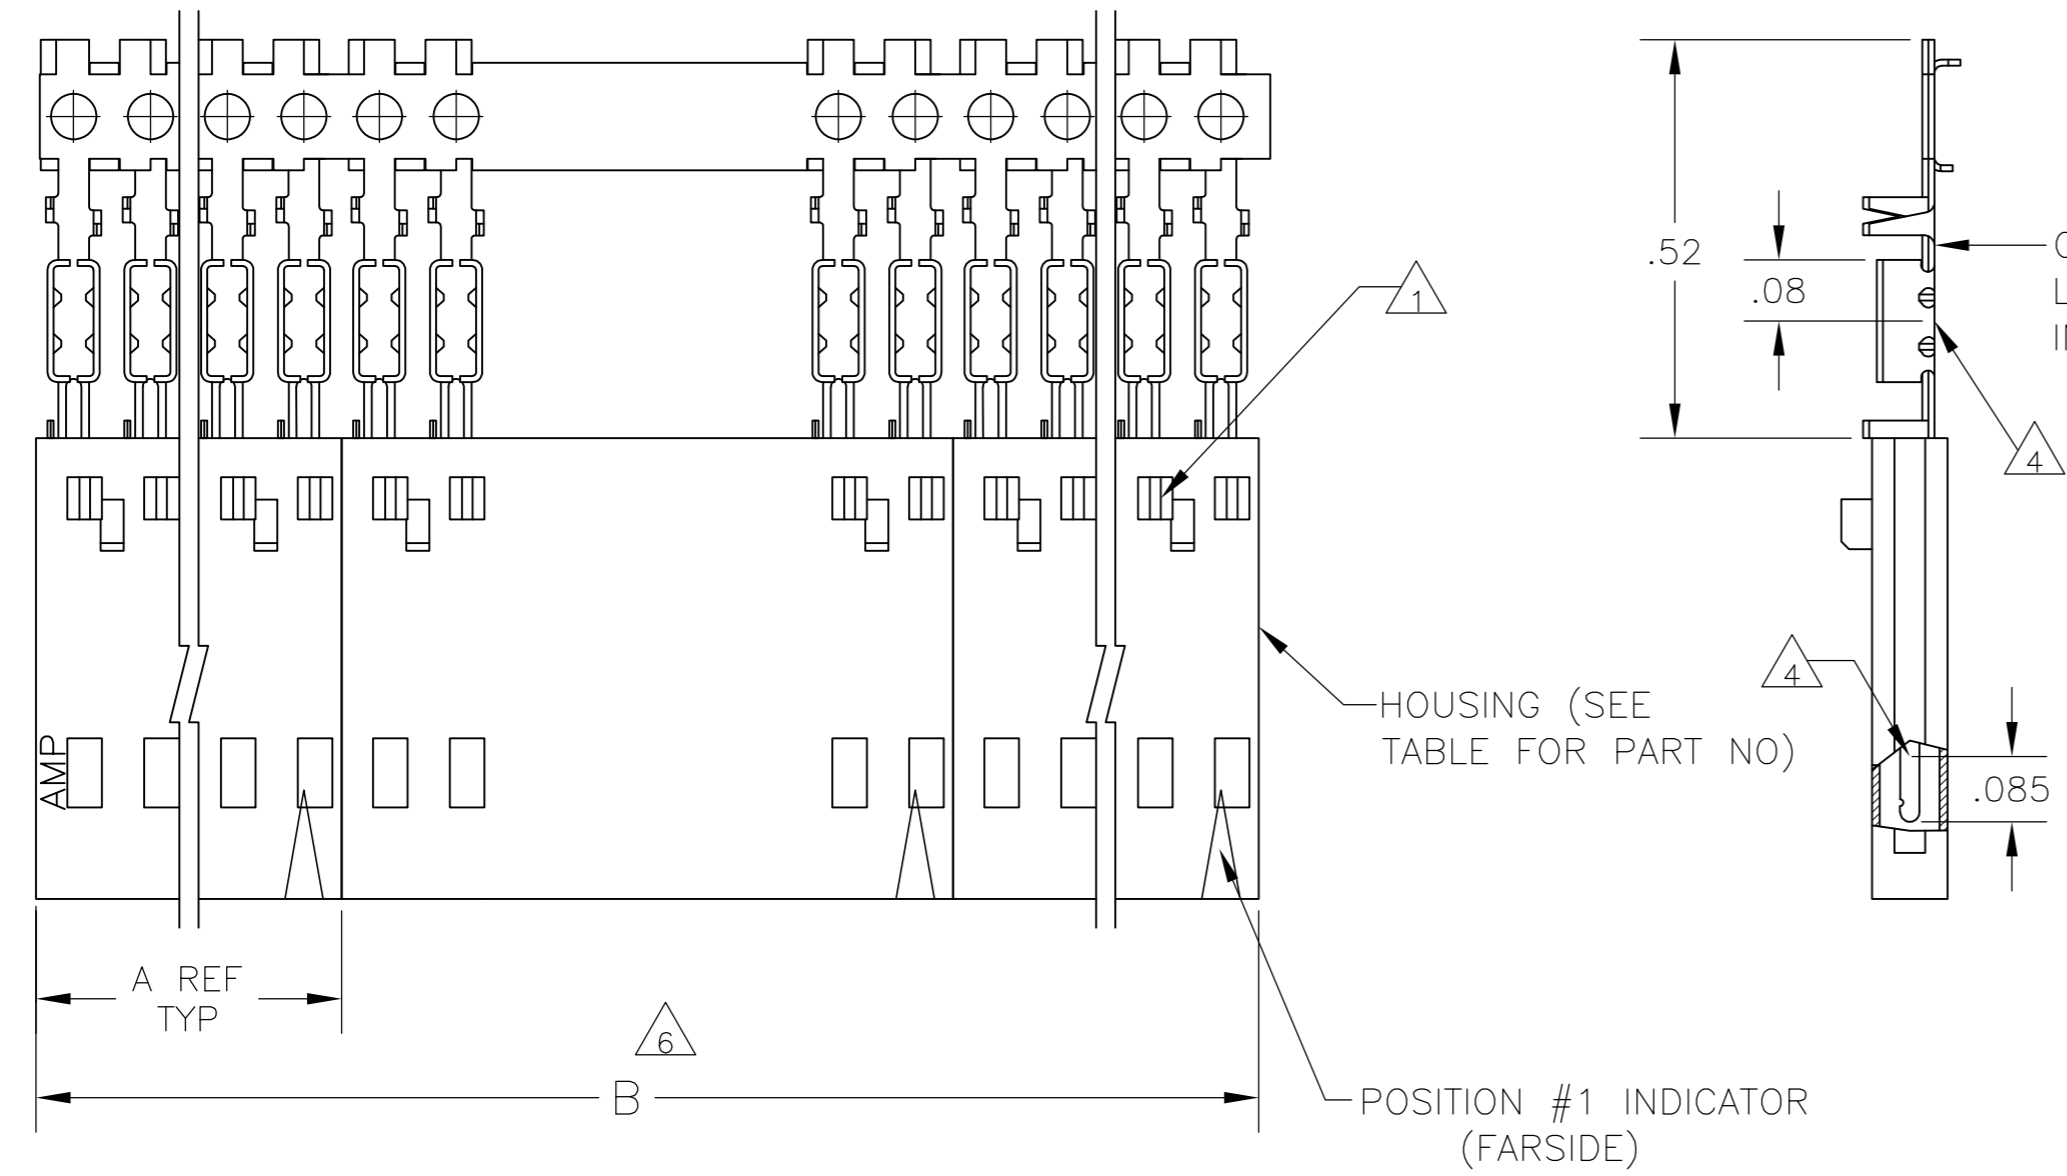

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103657
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 .000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 8 .000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 9 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 10 HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC, COLOR BLACK.
- 11 .000015 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 12 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

12	OBSOLETE	1	2	2.40	1.198	1-104503-1	12	6-103954-1
12	OBSOLETE	1	2	2.20	1.098	1-104503-0	11	6-103954-0
12	OBSOLETE	1	2	2.00	.998	104503-9	10	5-103954-9
12	OBSOLETE	1	2	1.80	.898	104503-8	9	5-103954-8
12	OBSOLETE	1	2	1.60	.798	104503-7	8	5-103954-7
12	OBSOLETE	1	2	1.40	.698	104503-6	7	5-103954-6
12	OBSOLETE	1	4	2.39	.598	104503-5	6	5-103954-5
		1	4	1.99	.498	104503-4	5	5-103954-4
		1	5	1.99	.398	104503-3	4	5-103954-3
		1	5	1.49	.298	104503-2	3	5-103954-2
		1	10	1.98	.198	104503-1	2	5-103954-1
		9	8	5	1.99	104503-3	4	1-103954-2
12	OBSOLETE	7	2	2.40	1.198	1-104503-1	12	1-103954-1
12	OBSOLETE	7	2	2.20	1.098	1-104503-0	11	1-103954-0
12	OBSOLETE	7	2	2.00	.998	104503-9	10	103954-9
12	OBSOLETE	7	2	1.80	.898	104503-8	9	103954-8
12	OBSOLETE	7	2	1.60	.798	104503-7	8	103954-7
12	OBSOLETE	7	2	1.40	.698	104503-6	7	103954-6
		7	4	2.39	.598	104503-5	6	103954-5
12	OBSOLETE	7	4	1.99	.498	104503-4	5	103954-4
		7	5	1.99	.398	104503-3	4	103954-3
12	OBSOLETE	7	5	1.49	.298	104503-2	3	103954-2
		7	10	1.98	.198	104503-1	2	103954-1
	PLATING	6		B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN L. MAYER 05NOV86
 CHK J. GESFORD 08OCT03
 APVD J. GESFORD 08OCT03

Tyco Electronics Corporation
 Harrisburg, Pa 17105-3608

NAME: PIN ASSEMBLY, AMPMODU MTE, SINGLE ROW, .100

PRODUCT SPEC: 108-25034
 APPLICATION SPEC: 114-25026

SIZE: A2 CAGE CODE: 00779 C=103954 DRAWING NO: RESTRICTED TO: -

MATERIAL: 10 SEE TABLE FINISH: WEIGHT: - SCALE: 4:1 SHEET 1 OF 1 REV L1

CUSTOMER DRAWING

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)