
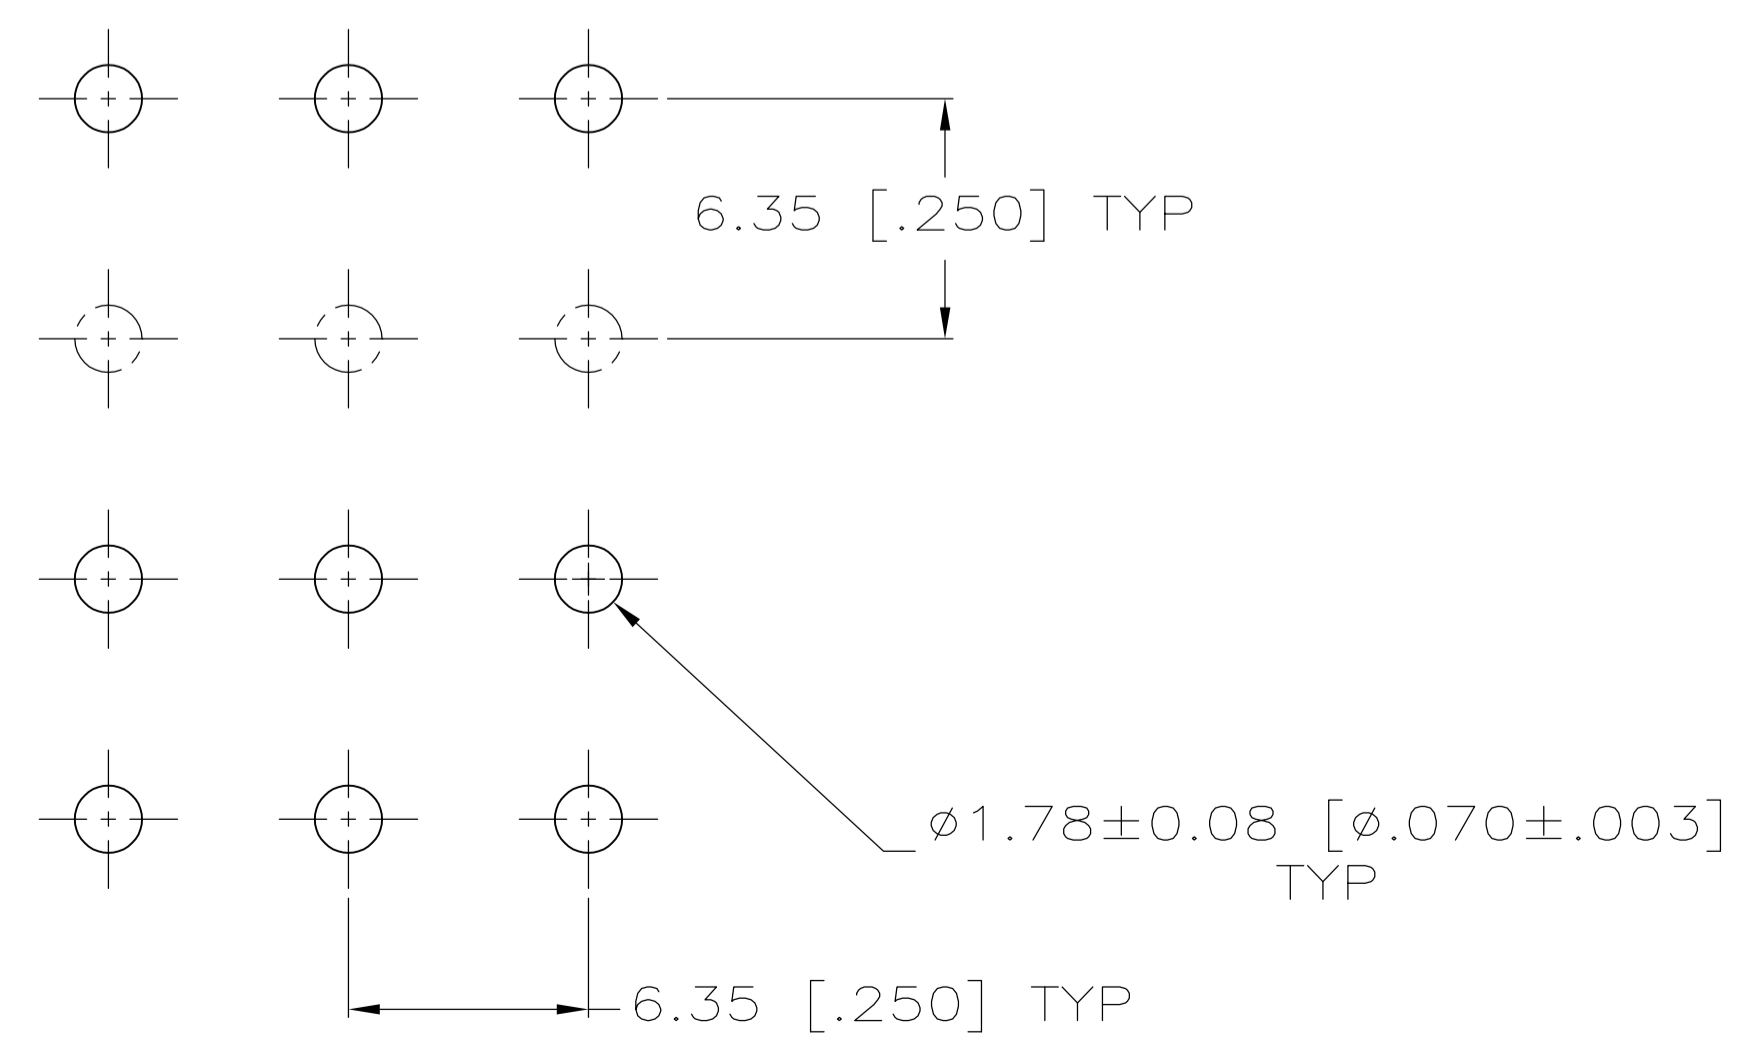


LOC		DIST		REVISIONS			
CM	00	REV	DATE	BY	CHK	APPV	
M1		REVISED PER ECR-12-011660	28JAN13	KH	TM		

- 1 PARTS MUST COMPLY WITH AMP SOLDERABILITY SPEC 109-11-3.
- 2 CONTACT IS STAMPED FROM PRE-PLATED STOCK WHICH IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN STRIPED WITH 0.00076 [.000030] GOLD IN CONTACT AREA INDICATED AND TIN-LEAD ON SOLDER TAIL END.
- 3 CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- 4 CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.
- 5 SUPERSEDED BY 350829-4

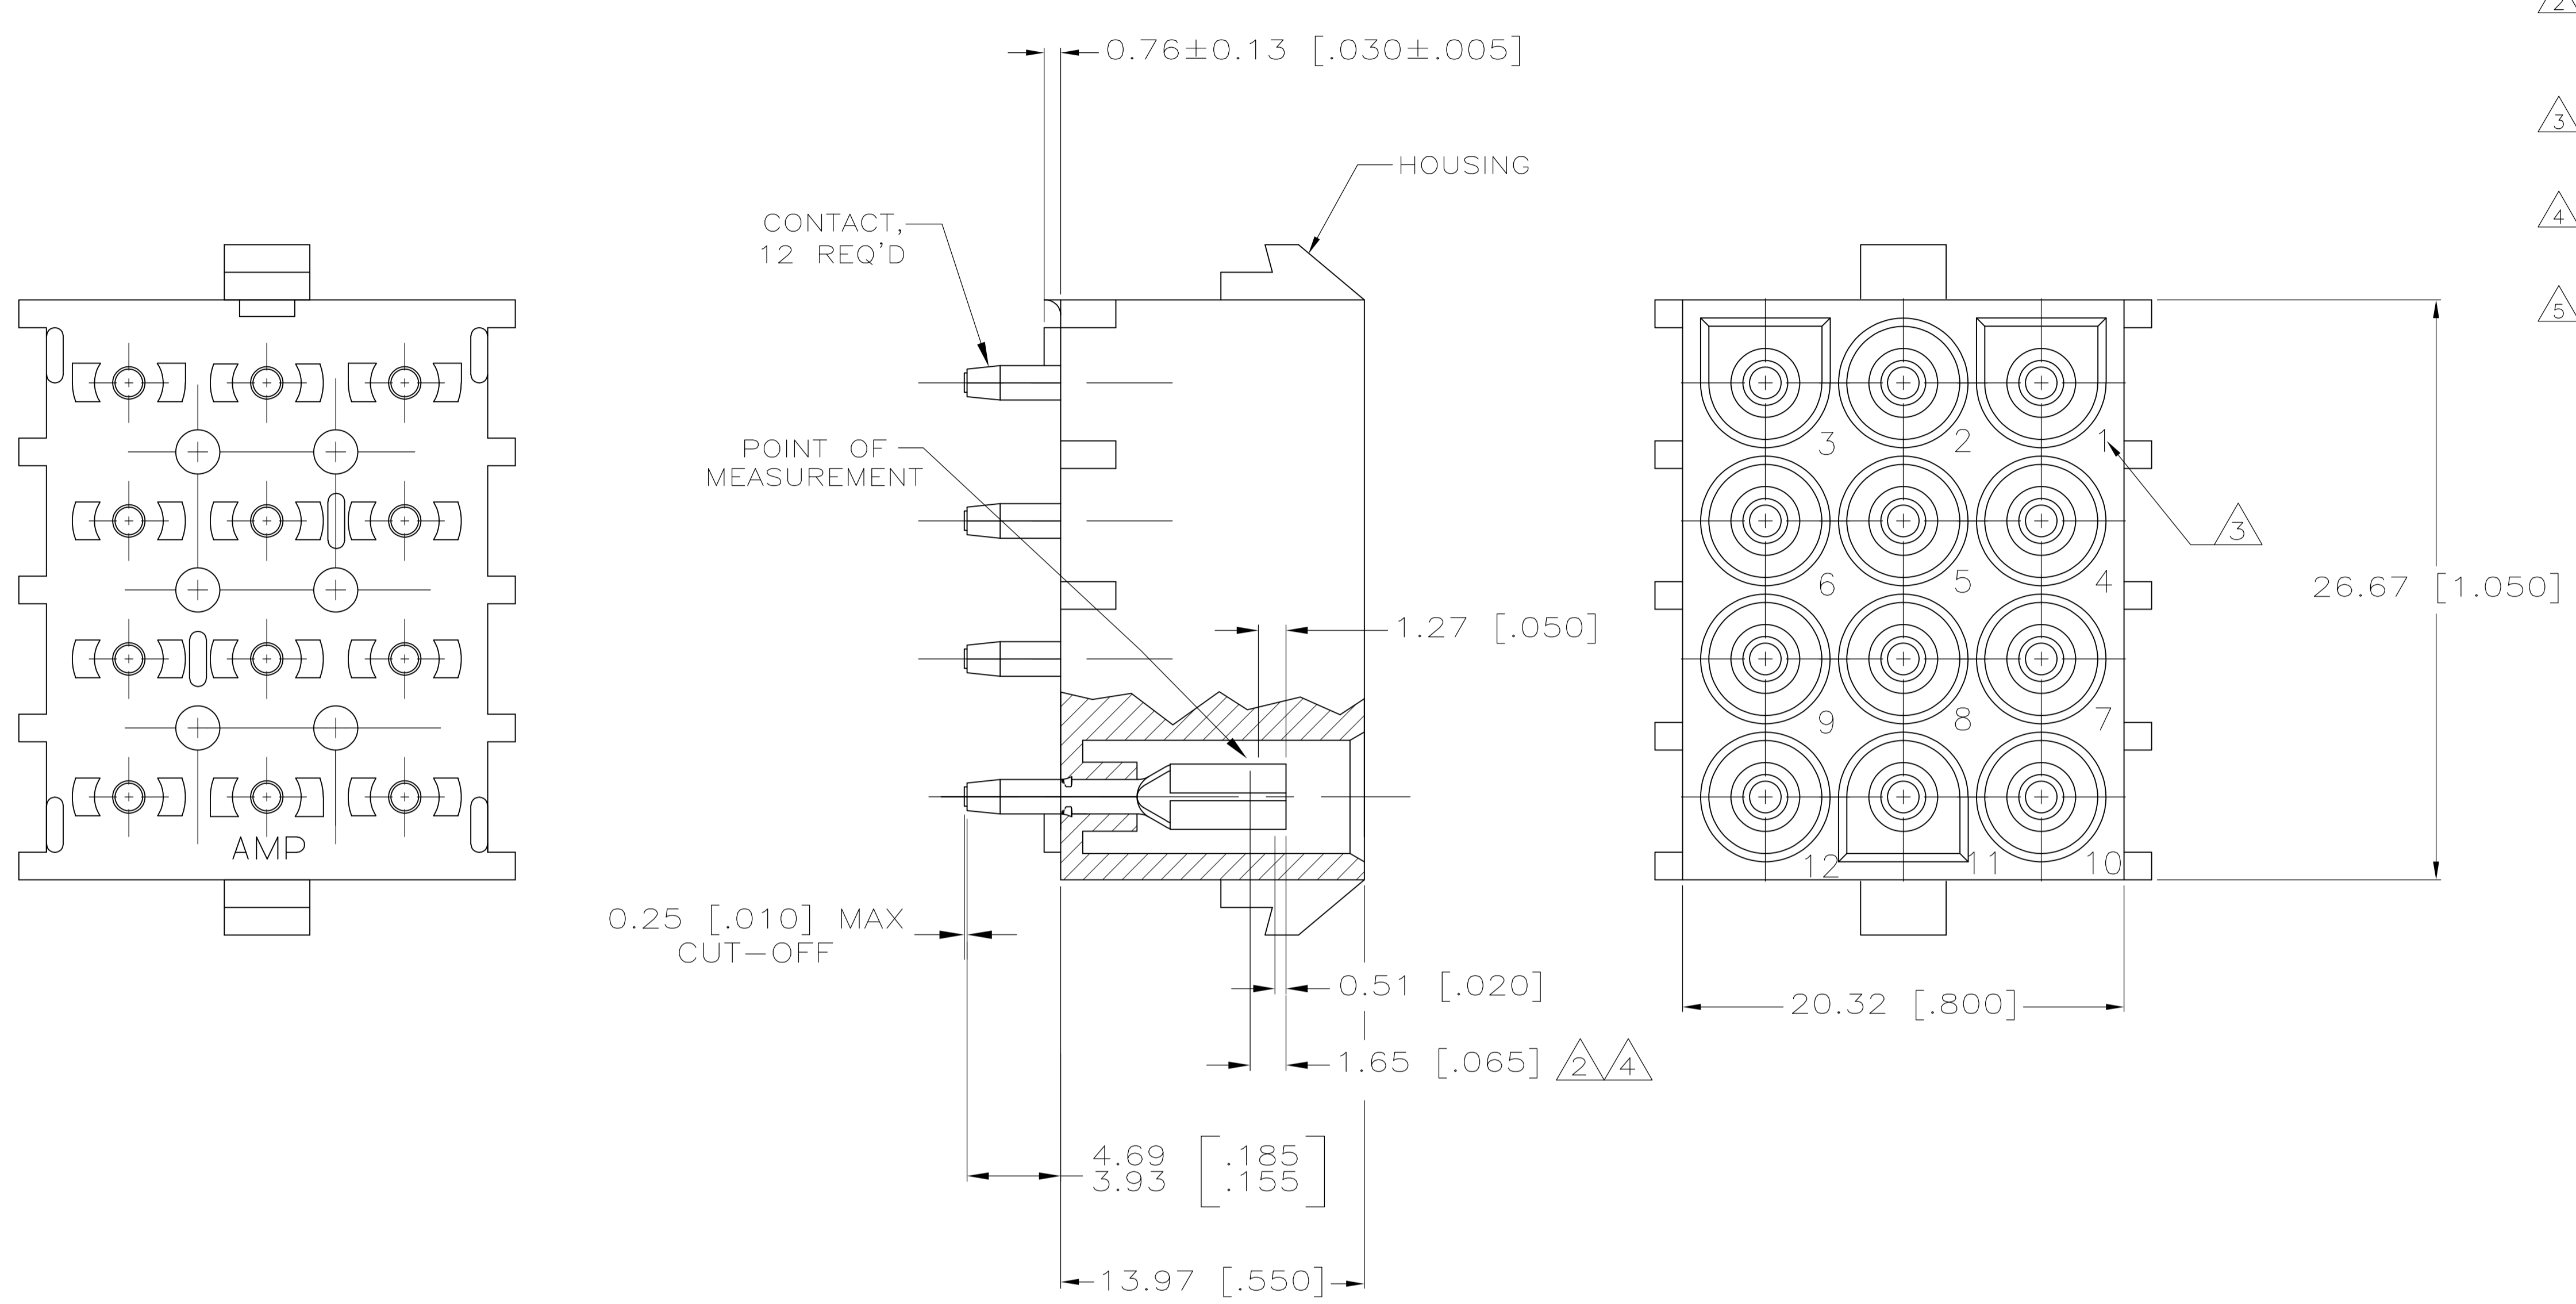

RECOMMENDED LAYOUT FOR 1.58 [0.062] THICK PC BOARD

PH BRZ GOLD 4	NYLON,UL 94V-0	350829-4
PH BRZ GOLD 2	NYLON,UL 94V-0	350829-2
PH BRZ TIN	NYLON,UL 94V-0	350829-1
CONTACT	HOUSING	PART NO

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPROVED:		NAME:	
mm	[INCHES]	0 PL	±	APV	DATE	APV	DATE
		1 PL	±	S.	11OCT2005 <td>S.</td> <td>11OCT2005 </td>	S.	11OCT2005
		2 PL	±	12 CIRCUIT UNIVERSAL MATE-N-LOK (TM)			
		3 PL	± 0.13 [.005]	P.C. BOARD SOCKET HEADER ASSEMBLY			
		4 PL	±	APPLICATION SPEC			
		ANGLES	±	SIZE			
				CAGE CODE			
				DRAWING NO			
				RESTRICTED TO			
				WEIGHT			
				A1 00779 C=350829			
				CUSTOMER DRAWING			
				SCALE 5:1 SHEET 1 OF 1 REV M1			

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)