
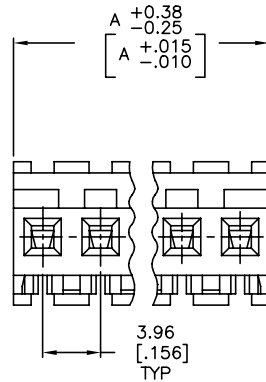
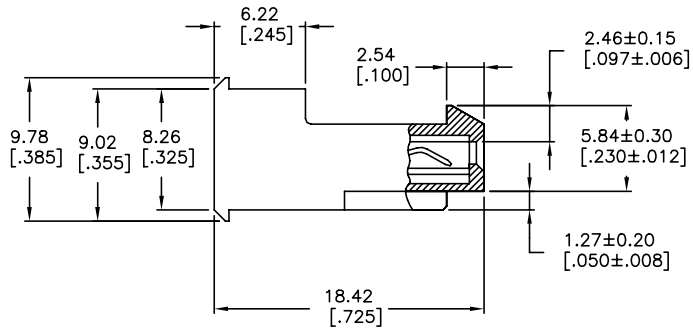


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - TE CONNECTIVITY ALL RIGHTS RESERVED.

REVISIONS					
P	LT/R	DESCRIPTION	DATE	DMN	APVD
V		REVISED PER ECR-20-000822	27MAY2020	PC	SW

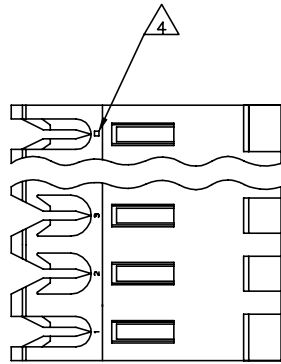

95.10	[3.744]	24	5-640601-4
91.14	[3.588]	23	5-640601-3
87.17	[3.432]	22	5-640601-2
83.21	[3.276]	21	5-640601-1
79.25	[3.120]	20	5-640601-0
75.29	[2.964]	19	4-640601-9
71.32	[2.808]	18	4-640601-8
67.36	[2.652]	17	4-640601-7
63.40	[2.496]	16	4-640601-6
59.44	[2.340]	15	4-640601-5
55.47	[2.184]	14	4-640601-4
51.51	[2.028]	13	4-640601-3
47.55	[1.872]	12	4-640601-2
43.59	[1.716]	11	4-640601-1
39.62	[1.560]	10	4-640601-0
35.66	[1.404]	9	3-640601-9
31.70	[1.248]	8	3-640601-8
27.74	[1.092]	7	3-640601-7
23.77	[.936]	6	3-640601-6
19.81	[.780]	5	3-640601-5
15.85	[.624]	4	3-640601-4
11.89	[.468]	3	3-640601-3
7.92	[.312]	2	3-640601-2
95.10	[3.744]	24	2-640601-4
91.14	[3.588]	23	2-640601-3
87.17	[3.432]	22	2-640601-2
83.21	[3.276]	21	2-640601-1
79.25	[3.120]	20	2-640601-0
75.29	[2.964]	19	1-640601-9
71.32	[2.808]	18	1-640601-8
67.36	[2.652]	17	1-640601-7
63.40	[2.496]	16	1-640601-6
59.44	[2.340]	15	1-640601-5
55.47	[2.184]	14	1-640601-4
51.51	[2.028]	13	1-640601-3
47.55	[1.872]	12	1-640601-2
43.59	[1.716]	11	1-640601-1
39.62	[1.560]	10	1-640601-0
35.66	[1.404]	9	640601-9
31.70	[1.248]	8	640601-8
27.74	[1.092]	7	640601-7
23.77	[.936]	6	640601-6
19.81	[.780]	5	640601-5
15.85	[.624]	4	640601-4
11.89	[.468]	3	640601-3
7.92	[.312]	2	640601-2

OBSOLETE 95.10 [3.744] 24
SUPERSEDED 91.14 [3.588] 23
SUPERSEDED 87.17 [3.432] 22
SUPERSEDED 83.21 [3.276] 21
SUPERSEDED 79.25 [3.120] 20
SUPERSEDED 75.29 [2.964] 19
SUPERSEDED 71.32 [2.808] 18
SUPERSEDED 67.36 [2.652] 17
SUPERSEDED 63.40 [2.496] 16
OBSOLETE 59.44 [2.340] 15
SUPERSEDED 55.47 [2.184] 14
SUPERSEDED 51.51 [2.028] 13
SUPERSEDED 47.55 [1.872] 12
SUPERSEDED 43.59 [1.716] 11
SUPERSEDED 39.62 [1.560] 10
SUPERSEDED 35.66 [1.404] 9
SUPERSEDED 31.70 [1.248] 8
SUPERSEDED 27.74 [1.092] 7
SUPERSEDED 23.77 [.936] 6
SUPERSEDED 19.81 [.780] 5
SUPERSEDED 15.85 [.624] 4
SUPERSEDED 11.89 [.468] 3
SUPERSEDED 7.92 [.312] 2

- 1 MATERIAL: CONNECTOR - NYLON UL94V-2 (RED).
CONTACTS - 0.30[.012] THICK COPPER ALLOY (BRIGHT TIN-LEAD 0.00203[.000080] MIN. THICK FOR CONTACTS 640601-2 THRU 2-640601-4) (MATTE WHISKER MITIGATED TIN 0.00203[.000080] MIN THICKNESS OVER NICKEL UNDERPLATE FOR 3-640601-2 THRU 5-640601-4).
- 2 CONTACTS ACCEPT 22 AWG WIRE WITH 2.41[.095] MAX INSULATION DIAMETER.
- 3 CONTACTS MUST ACCEPT 1.14±0.03[.045±.001] SQUARE POST AND REMAIN LOCKED IN POSITION.
- 4 IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.
- 5 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6 HOUSING FEATURES ARE: FEED-THRU WITH LOCKING RAMP.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 8 OBSOLETE PARTS

THIS DRAWING IS A CONTROLLED DOCUMENT. DWG: B. LEWIS 12 FEB 91
 CHK: R. SWING 12 FEB 91
 APVD: D. CLARK 19 FEB 91

DIMENSIONS: mm [INCHES] TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ± -
 1 PLC ± -
 2 PLC ± -
 3 PLC ± -
 4 PLC ± -
 ANGLES ± -
 FINISH

MATERIAL 1

TE Connectivity Ltd.
 MTA-156 CONNECTOR ASSEMBLY, 22 AWG, STANDARD
 SIZE: A2 CAGE CODE: 00779 DRAWING NO: 640601 RESTRICTED TO: -
 WEIGHT: 114-1020 SCALE: 4:1 SHEET: 1 OF 1 REV: V
 CUSTOMER DRAWING

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)