


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
0		RELEASED	12JAN2004	SW HW
A		REVISED PER ECO-18-008968	11JUN2018	RS MZ

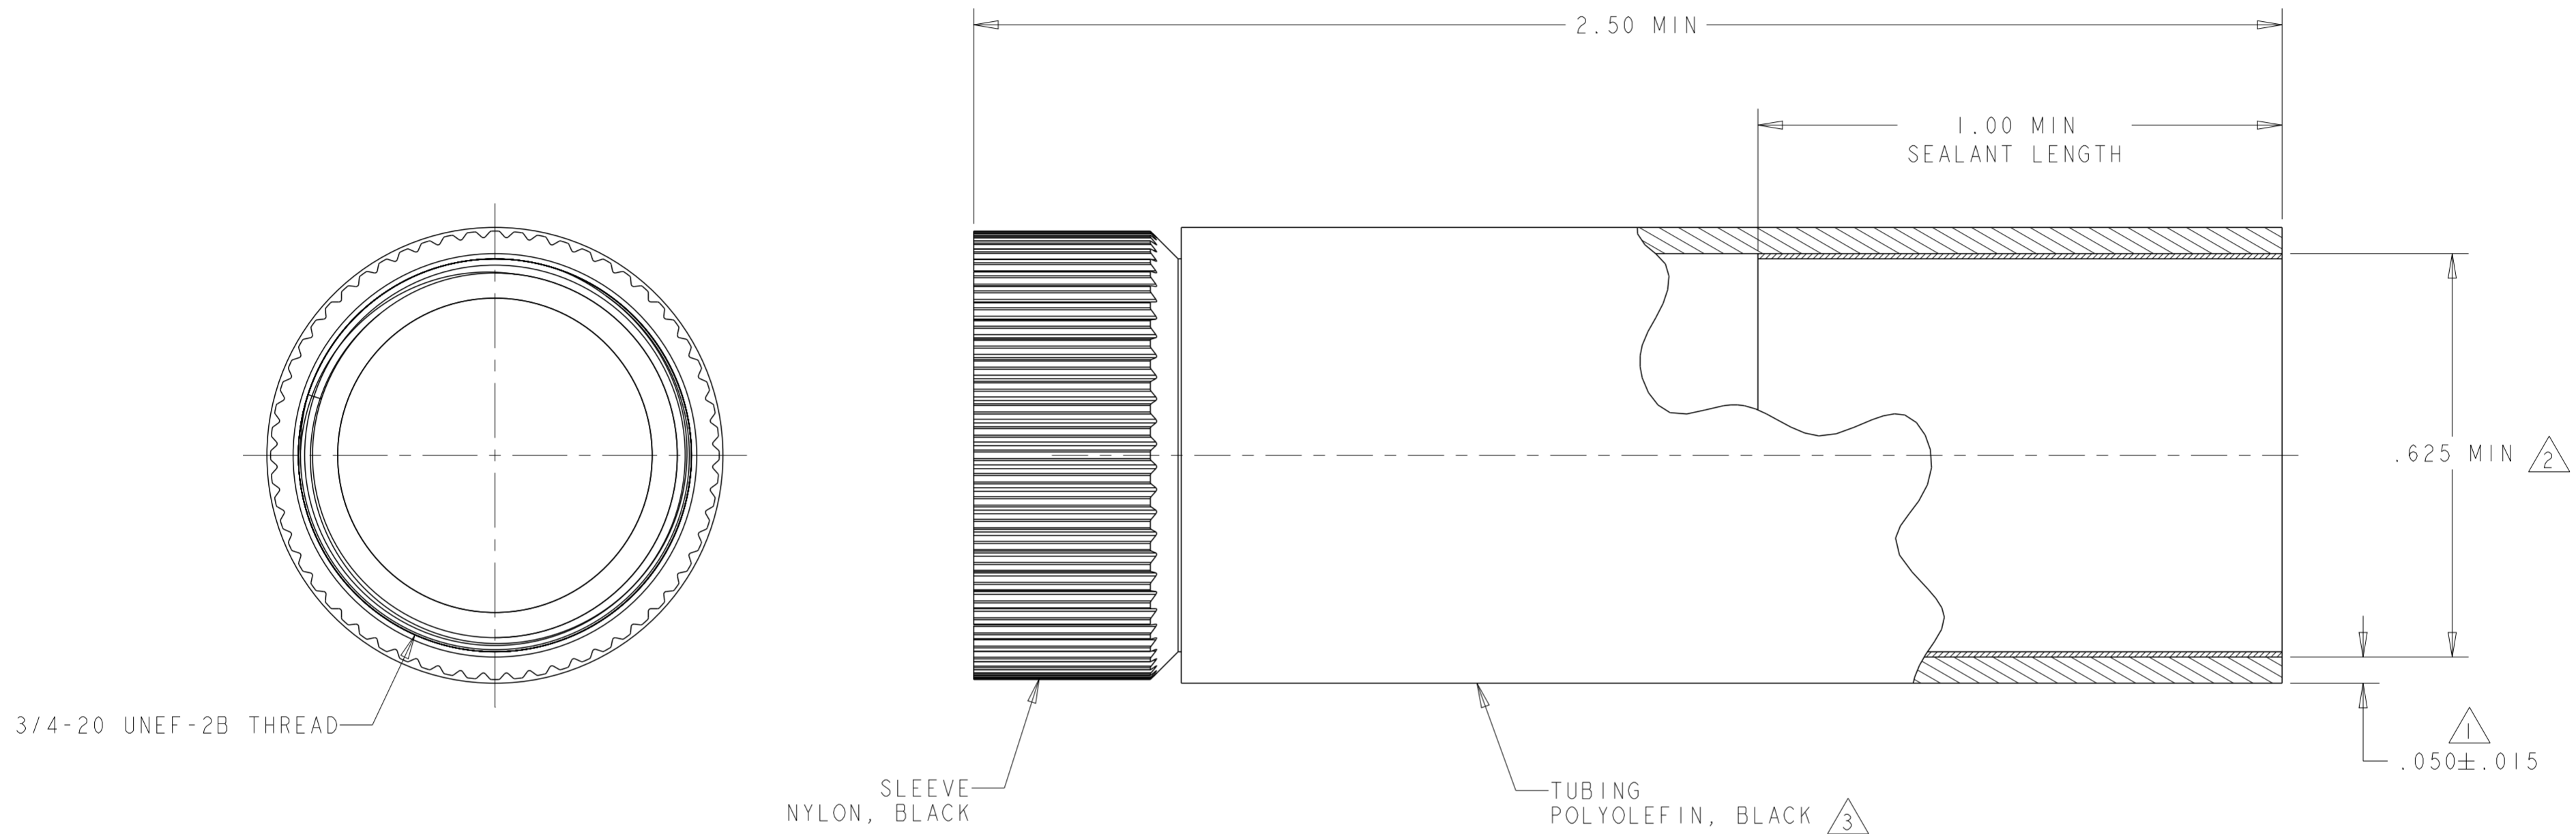

- 1 NOMINAL WALL THICKNESS, EXPANDED.
- 2 EXPANDED INSIDE DIAMETER.
- 3 .250 MAXIMUM RECOVERED INSIDE DIAMETER.
- 4. ASSEMBLY WILL PASS ONE POUND PER SQ INCH WATER PRESSURE TEST.
- 5. TUBING SHRINK TEMPERATURE: 250°F.
- 6. OPERATING TEMPERATURE: -67°F TO 230°F.
- 7. THIS PART WILL ACCOMODATE Ø.250-Ø.600 CABLE RANGE.

1546921-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WELDON 12JAN2004	TE Connectivity	
DIMENSIONS: INCHES		CHK H. WAKEEM 12JAN2004		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD H. WAKEEM 12JAN2004	NAME STRAIN RELIEF ASSEMBLY, SIZE 11, MINI CPC	
0 PLC ± 1 PLC ±0.1 2 PLC ±0.02 3 PLC ±0.005 4 PLC ±0.0000 ANGLES ± FINISH -		PRODUCT SPEC -	APPLICATION SPEC -	RESTRICTED TO -
MATERIAL -	WEIGHT -	SIZE A200779	DRAWING NO C-1546921	SCALE 4:1
CUSTOMER DRAWING		SHEET 1 OF 1		REV A

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)