


creo
Creo Parametric 2.0
**DO NOT REVISE
EXCEPT BY CAD**

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
B		REVISED DRAWING ECO-14-008816	11JUN2014	NCL	LWP

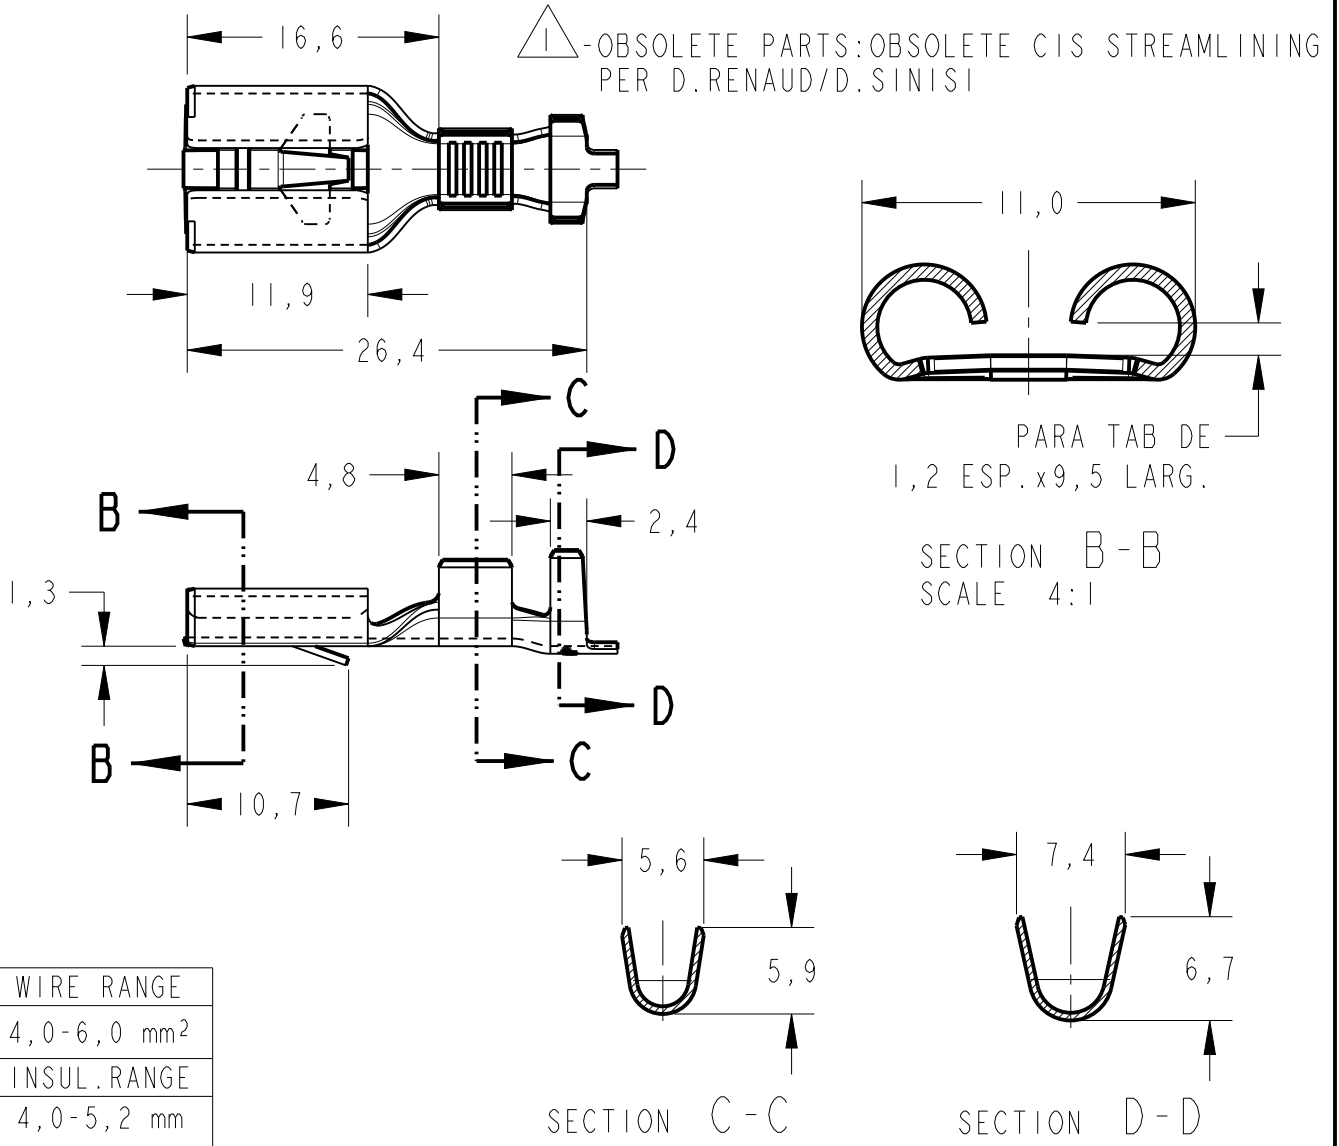

WIRE RANGE
4,0-6,0 mm ²
INSUL. RANGE
4,0-5,2 mm

OBSOLETE
 OBSOLETE

ESTANHADO	BRONZE FOSF/PHOSP BRONZE	881606-4
- / -	BRONZE FOSF/PHOSP BRONZE	881606-3
ESTANHADO	LATÃO/BRASS	881606-2
- / -	LATÃO/BRASS	881606-1
FINISH	MATERIAL	PART NUMBER

20 RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

BY - COPYRIGHT 20

DIMENSIONS:	
mm	
TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 PLC	±
1 PLC	±0,3
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±1°

DWN	RKSTLEME	13AUG2007
CHK	GOOLIVEIRA	13AUG2007
APVD	LWPRADO	13AUG2007
PRODUCT SPEC	108-37015	
APPLICATION SPEC	-	
WEIGHT	-	
Customer Drawing		

MATERIAL	-		FINISH	-
TE Connectivity				
NAME .375 S. FAST-IN-ON RECEPTACLE				
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
A4	-	C=881606	-	
SCALE 2:1		SHEET 1 OF 1	REV B	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)