
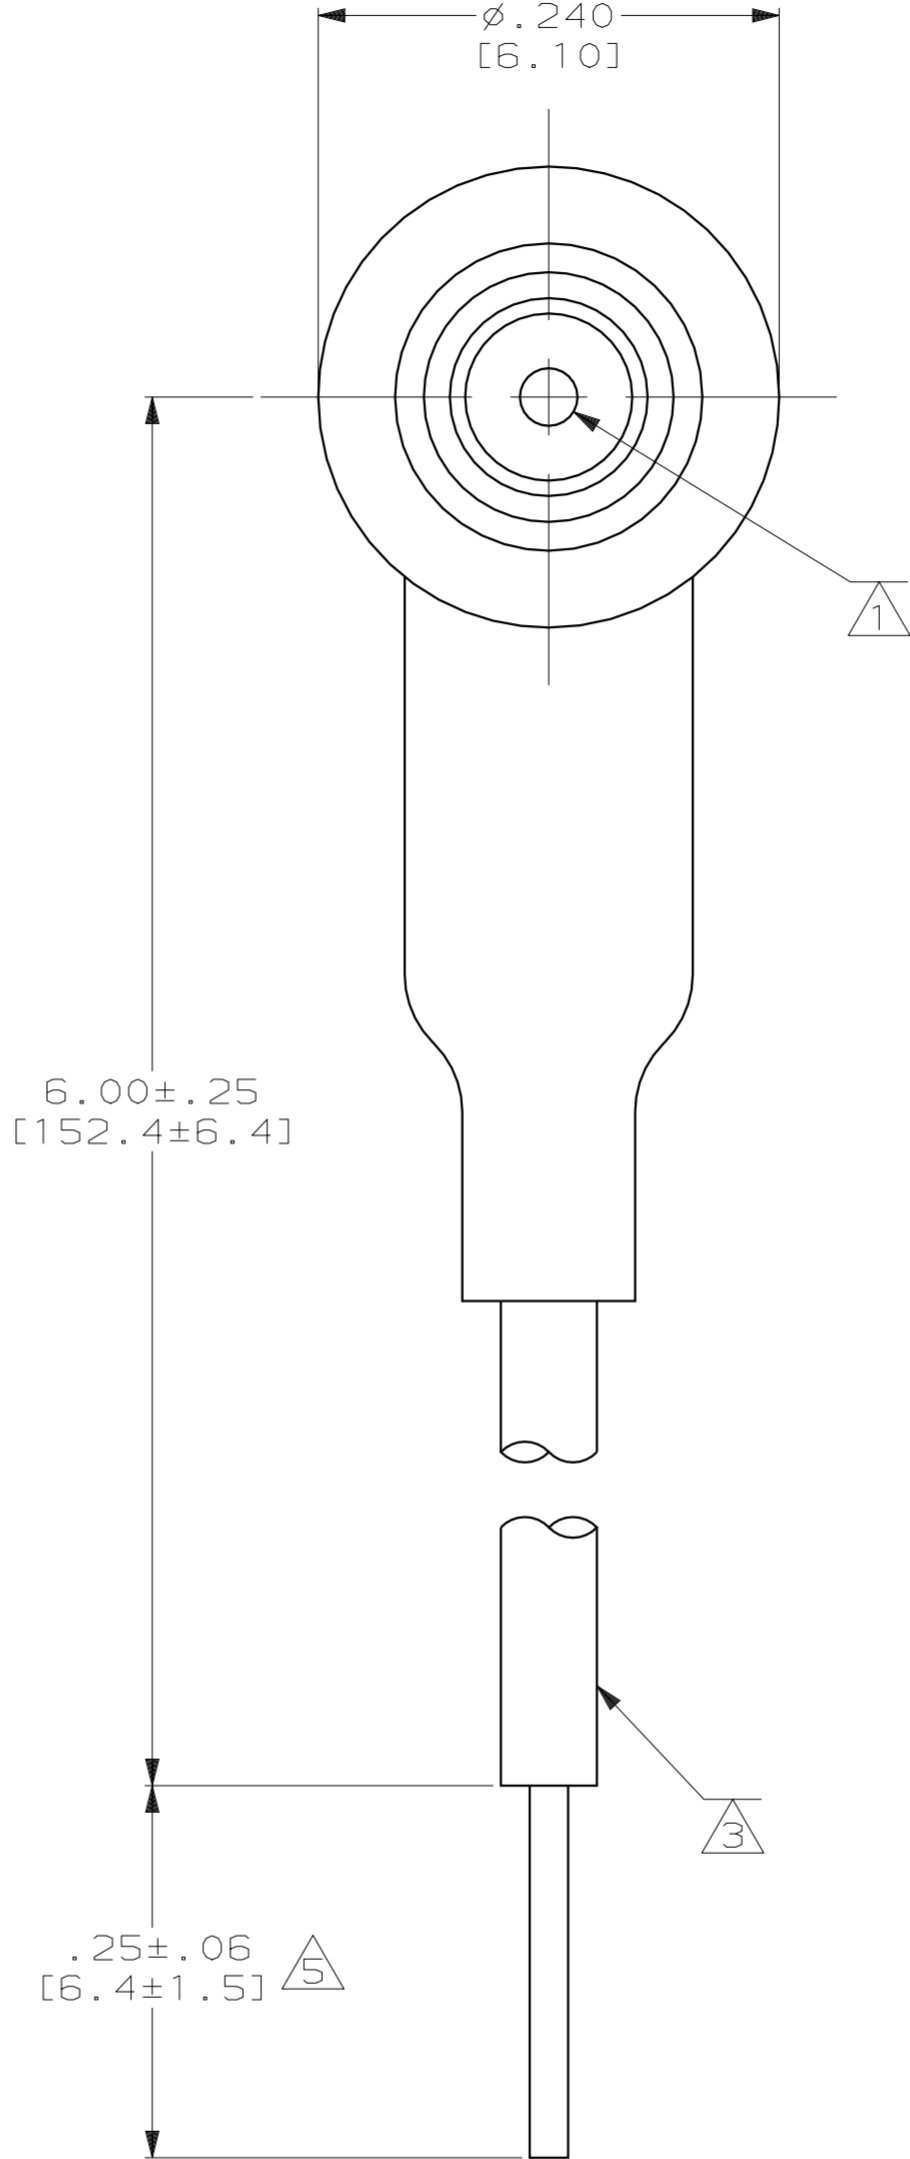


| LOC | DIST | P | F | ZONE | LTR | DESCRIPTION | DATE | APPD |
|-----|------|---|---|------|-----|----------------------------|---------|------|
| DF | 50 | | | | C | REACTIVATE;OH14-0329-05 CT | 7-21-05 | DE |

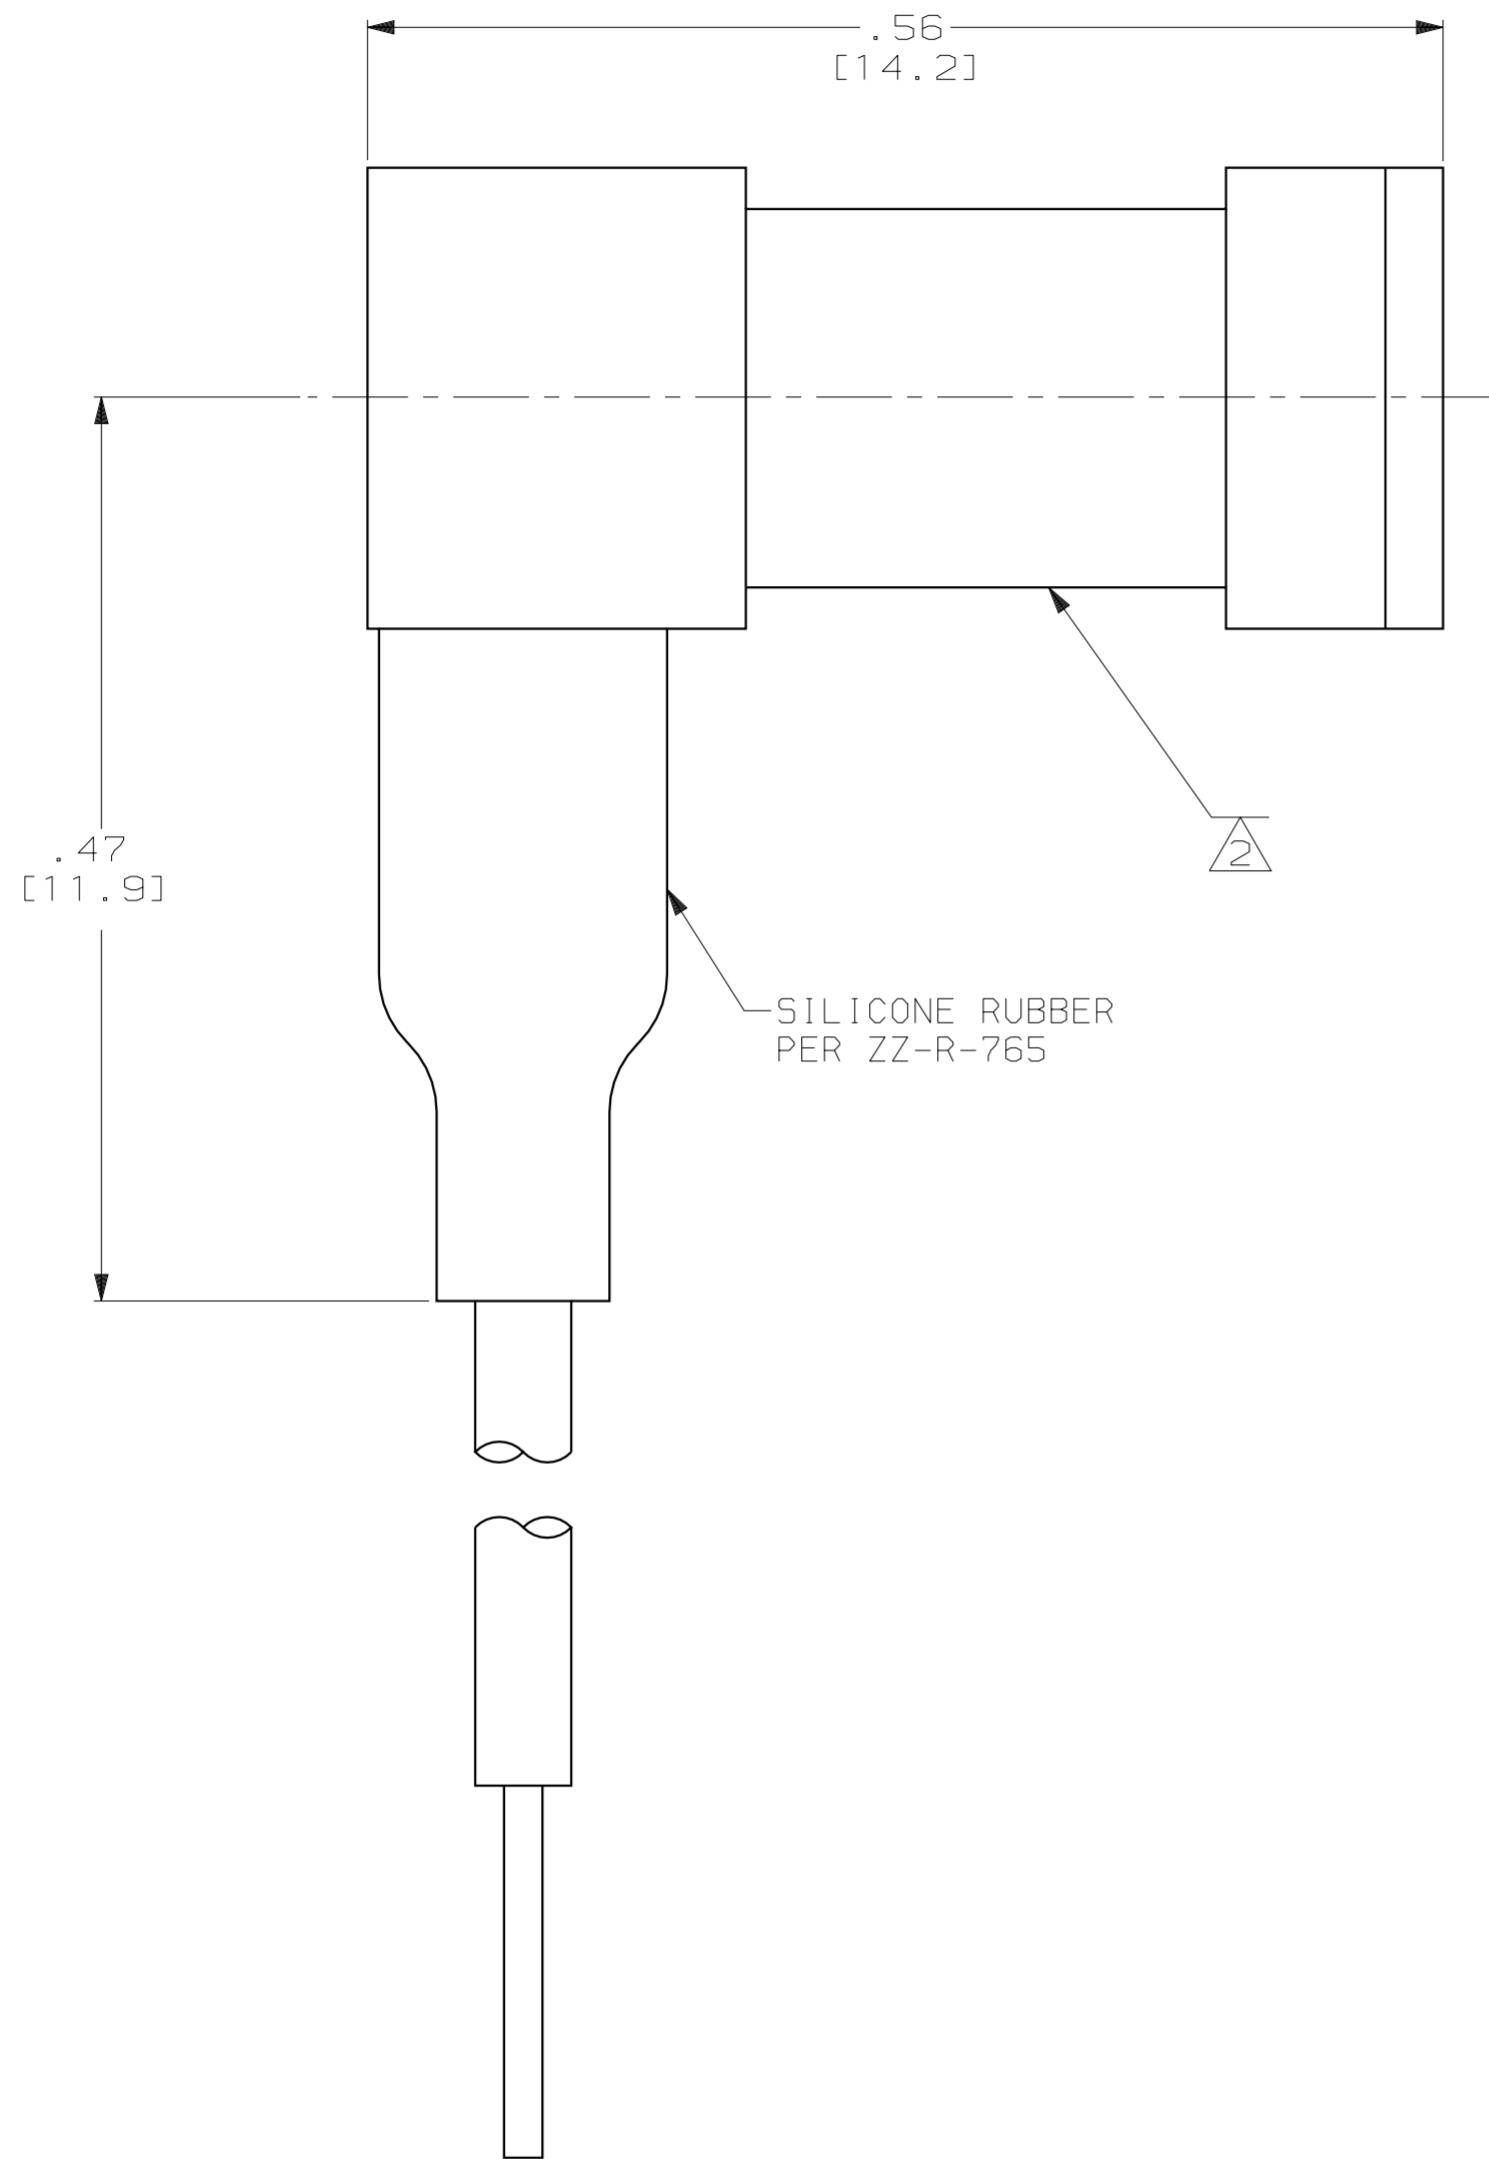

- ① SIZE 22 PIN CONTACT: .030 [0.76] DIA
MAT'L: BRASS PER QQ-B-626.
- ② RECEPTACLE HOUSING:
MAT'L: GLASS FILLED POLYETHERIMIDE RESIN.
- ③ CONDUCTOR:
24 (19/36) AWG SILVER PLATED COPPER
INSULATION: SILICONE COATED FEP; $\phi .060 \pm .005 [1.52 \pm 0.13]$
- 4. OPERATING TEMP: -55°C TO +125°C
TEST VOLTAGE: 18 KVDC AT 70,000 FT. ALTITUDE.
OPERATING VOLTAGE: 12 KVDC AT 70,000 FT ALTITUDE.
- ⑤ PIGTAIL IS SOLDER DIPPED.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

| | | | |
|--|---------------------------|---|------------------------|
| DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm] TOLERANCES ON : 2 PLC DEC $\pm .02 [0.5]$ 3 PLC DEC $\pm .005 [0.13]$ ANGLES $\pm -$ | DR 5-3-93 C.C.THOMAS | AMP Incorporated Harrisburg, PA 17105-3608 | |
| | CHK 1-11-95 D.EABY | | |
| SEE CALLOUTS | APPD 1-11-95 D.EABY | SIZE C 00779 | DRAWING NO C-448659 |
| FINISH SEE CALLOUTS | RLSE 9-3-02 C.C.THOMAS | SCALE 10:1 | SHEET 1 OF 1 |
| | PRODUCT SPEC - | | |
| | APPLICATION SPEC - | | |
| | WEIGHT - | | |

448659-1
PART NO.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)