

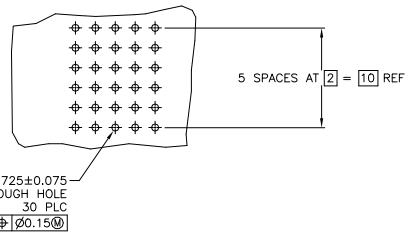
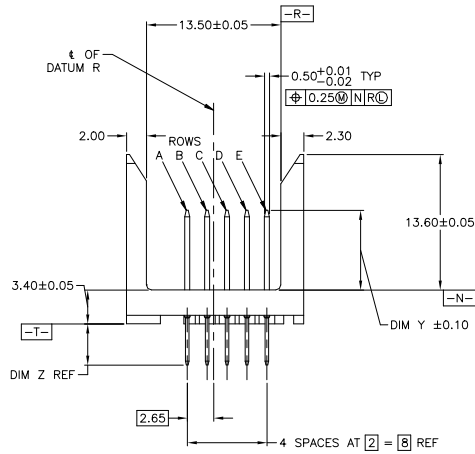





REVISIONS				
P	LNK	DESCRIPTION	DATE	BY/APP
A3		REVISED PER ECO-20-013368	24SEP2020	RZ HL

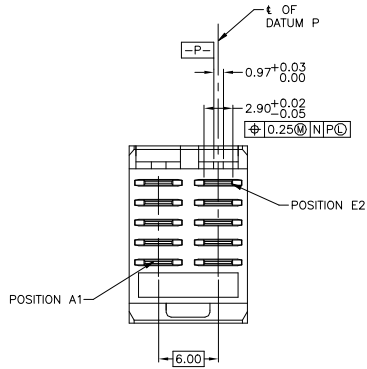

RECOMMENDED CIRCUIT PATTERN
PER IPC-D300 TYPE II, CLASS C
(COMPONENT SIDE)

- 1 HOUSING MATERIAL: LIQUID CRYSTAL POLYMER, NATURAL.
- 2 CONTACT MATERIAL: COPPER ALLOY.
- 3 CONTACT FINISH:
UNDERPLATE (ENTIRE CONTACT):
0.00127 MIN NICKEL PER SAE-AMS-QQ-N-290
ON MATING SURFACES:
FLASH GOLD PER ASTM B 488, OVER
0.00076 MIN PALLADIUM-NICKEL OVER UNDERPLATE, OR
0.00076 MIN GOLD PER ASTM B 488 OVER UNDERPLATE.
ON LEADS:
0.00127 MIN MATTE TIN PER ASTM B 545 OVER UNDERPLATE.
LUBRICATION (MIN MATING SURFACES):
SURFACE CONDITIONER AFTER PLATING.
- 4 PART NUMBER AND DATE CODE IN APPROXIMATE AREA AS SHOWN.



DETAIL Z
SCALE 20:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV: T. SHUEY 1-7-98	 TE Connectivity Ltd.
DIMENSIONS: mm		DATE: 1-16-98	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		UNIT: MILLIMETERS	NAME: ASSEMBLY, PIN, VERTICAL, 5 ROW, POWER MODULE, PRESS FIT LEAD, Z-PACK 2mm HM
PRODUCT SPEC: 108-1441 APPLICATION SPEC: 114-1075		SIZE: 114-1075	
MATERIAL:		DATE CODE: A100779	
FINISH:		DRAWING NO: C-5536642	
CUSTOMER DRAWING		SCALE: 4:1	SHEET: 1 OF 2 REV: A3

REVISIONS			
REV	DATE	BY	APP
-	SEE SHEET 1	-	-

AD	4	5.00	4.25
AC	3	8.00	4.25
AB	2	7.25	4.25
AA	1	6.50	4.25
CONTACT LETTER	ITEM NUMBER	DIM Y	DIM Z

E	AA	AA	E	5536642-1
D	AA	AA	D	
C	AA	AA	C	
B	AA	AA	B	
A	AA	AA	A	
ROW	1	2	ROW	PART NUMBER
				CONTACT LOAD CHART

E	AA	AC	E	5536642-6
D	AA	AC	D	
C	AA	AC	C	
B	AA	AC	B	
A	AA	AC	A	
ROW	1	2	ROW	PART NUMBER
				CONTACT LOAD CHART

E	AB	AB	E	1-5536642-6
D	AB	AB	D	
C	AB	AB	C	
B	AC	AC	B	
A	AC	AC	A	
ROW	1	2	ROW	PART NUMBER
				CONTACT LOAD CHART

E	AA	AA	E	5536642-4
D	AA	AA	D	
C	AB	AB	C	
B	AC	AC	B	
A	AC	AC	A	
ROW	1	2	ROW	PART NUMBER
				CONTACT LOAD CHART

OBSOLETE				
E	AC	AC	E	5536642-7
D	AC	AC	D	
C	AC	AC	C	
B	AC	AC	B	
A	AC	AC	A	
ROW	1	2	ROW	PART NUMBER
				CONTACT LOAD CHART




E	AB	AB	E	2-5536642-4
D	AA	AA	D	
C	AB	AB	C	
B	AA	AA	B	
A	AB	AB	A	
ROW	1	2	ROW	PART NUMBER
				CONTACT LOAD CHART

OBSOLETE				
E	AA	AA	E	5536642-5
D	AA	AA	D	
C	AA	AA	C	
B	AC	AC	B	
A	AA	AA	A	
ROW	1	2	ROW	PART NUMBER
				CONTACT LOAD CHART

E	AC	AC	E	1-5536642-0
D	AB	AB	D	
C	AD	AD	C	
B			B	
A	AC	AC	A	
ROW	1	2	ROW	PART NUMBER
				CONTACT LOAD CHART

E	AC	AA	E	2-5536642-5
D	AC	AA	D	
C	AC	AA	C	
B	AC	AA	B	
A	AC	AA	A	
ROW	1	2	ROW	PART NUMBER
				CONTACT LOAD CHART

E	AA	AA	E	2-5536642-6
D	AB	AB	D	
C	AC	AC	C	
B			B	
A	AB	AC	A	
ROW	1	2	ROW	PART NUMBER
				CONTACT LOAD CHART

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV: T-SHUEY 1-7-98	 TE Connectivity Ltd.
DIMENSIONS: mm		DATE: 1-10-98	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP: W. MILLIMES	ASSEMBLY, PIN, VERTICAL, 5 ROW, POWER MODULE, PRESS FIT LEAD, Z-PACK 2mm HM
 0 P.C. ± 1 P.C. ± 2 P.C. ± 3 P.C. ± 4 P.C. ± 5 P.C. ± 6 P.C. ± 7 P.C. ± 8 P.C. ± 9 P.C. ± 10 P.C. ±		PRODUCT SPEC: 108-1441 APPLICATION SPEC: 114-1075 MFG. PART:	
MATERIAL: 		SIZE: ONE CODE (FROM 10) STOCK: A100779 ©-5536642	RESTRICTED TO:
CUSTOMER DRAWING		SCALE: 4:1	SHEET: 2 OF 2 REV: A3

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)