

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	OO	B	ECO-06-000585	08AUG06	BSV MK

2 SPECIFICATIONS:

MATERIALS:

CASE : HIGH TEMPERATURE PLOYSTER UL 94V-0.
 ACTUATOR BUTTON : THERMOPLASTIC.COLORS:SEE CHART BELOW
 MOVING CONTACT : COPPER ALLOY.GOLD PLATED OVER NICKEL.
 FIXED CONTACT : COPPER ALLOY.GOLD PLATED OVER NICKEL.
 TERMINALS : COPPER ALLOY.TIN LEAD PLATED.
 TERMINAL SEAL : SP EPOXY
 DP EPOXY OPTIONAL.

ELECTRICAL:

CONTACT RATING : GOLD=0.4VA MAX.@ 20 VDC OR PEAK AC.
 INITIAL CONTACT RESISTANCE : 20 MILLIOHMS MAX.
 INSULATION RESISTANCE : 1.000MEGHOHMS @ 500VDC MIN.
 DIELECTRIC STRENGTH : 1.000VAC @ SEALEVEL.
 LIFE EXPECTANCY:GOLD : 1 POLES=100,000CYCLES.
 2 POLES=80,000 CYCLES.

MECHANICAL:

ACTUATION FORCE : TP11CG-PC.TP21CCG-PC : 9oz(.26kg)
 TP11FG-PC.TP21FFG-PC : 12oz(0.34kg)
 ACTUATION TRAVEL : .030 APPROX.


ENVIRONMENTAL:

OPERATING TEMPERATURE : -22°F TO +149°F(-30°C TO 65°C)
 STORAGE TEMPERATURE : -22°F TO +149°F(-30°C TO +65°C)

2 NOTES:

1. INTERPRET DRAWING PER ASME Y14.5M-1994.

(*)	COLORS
0	BLACK
2	RED
6	BLUE

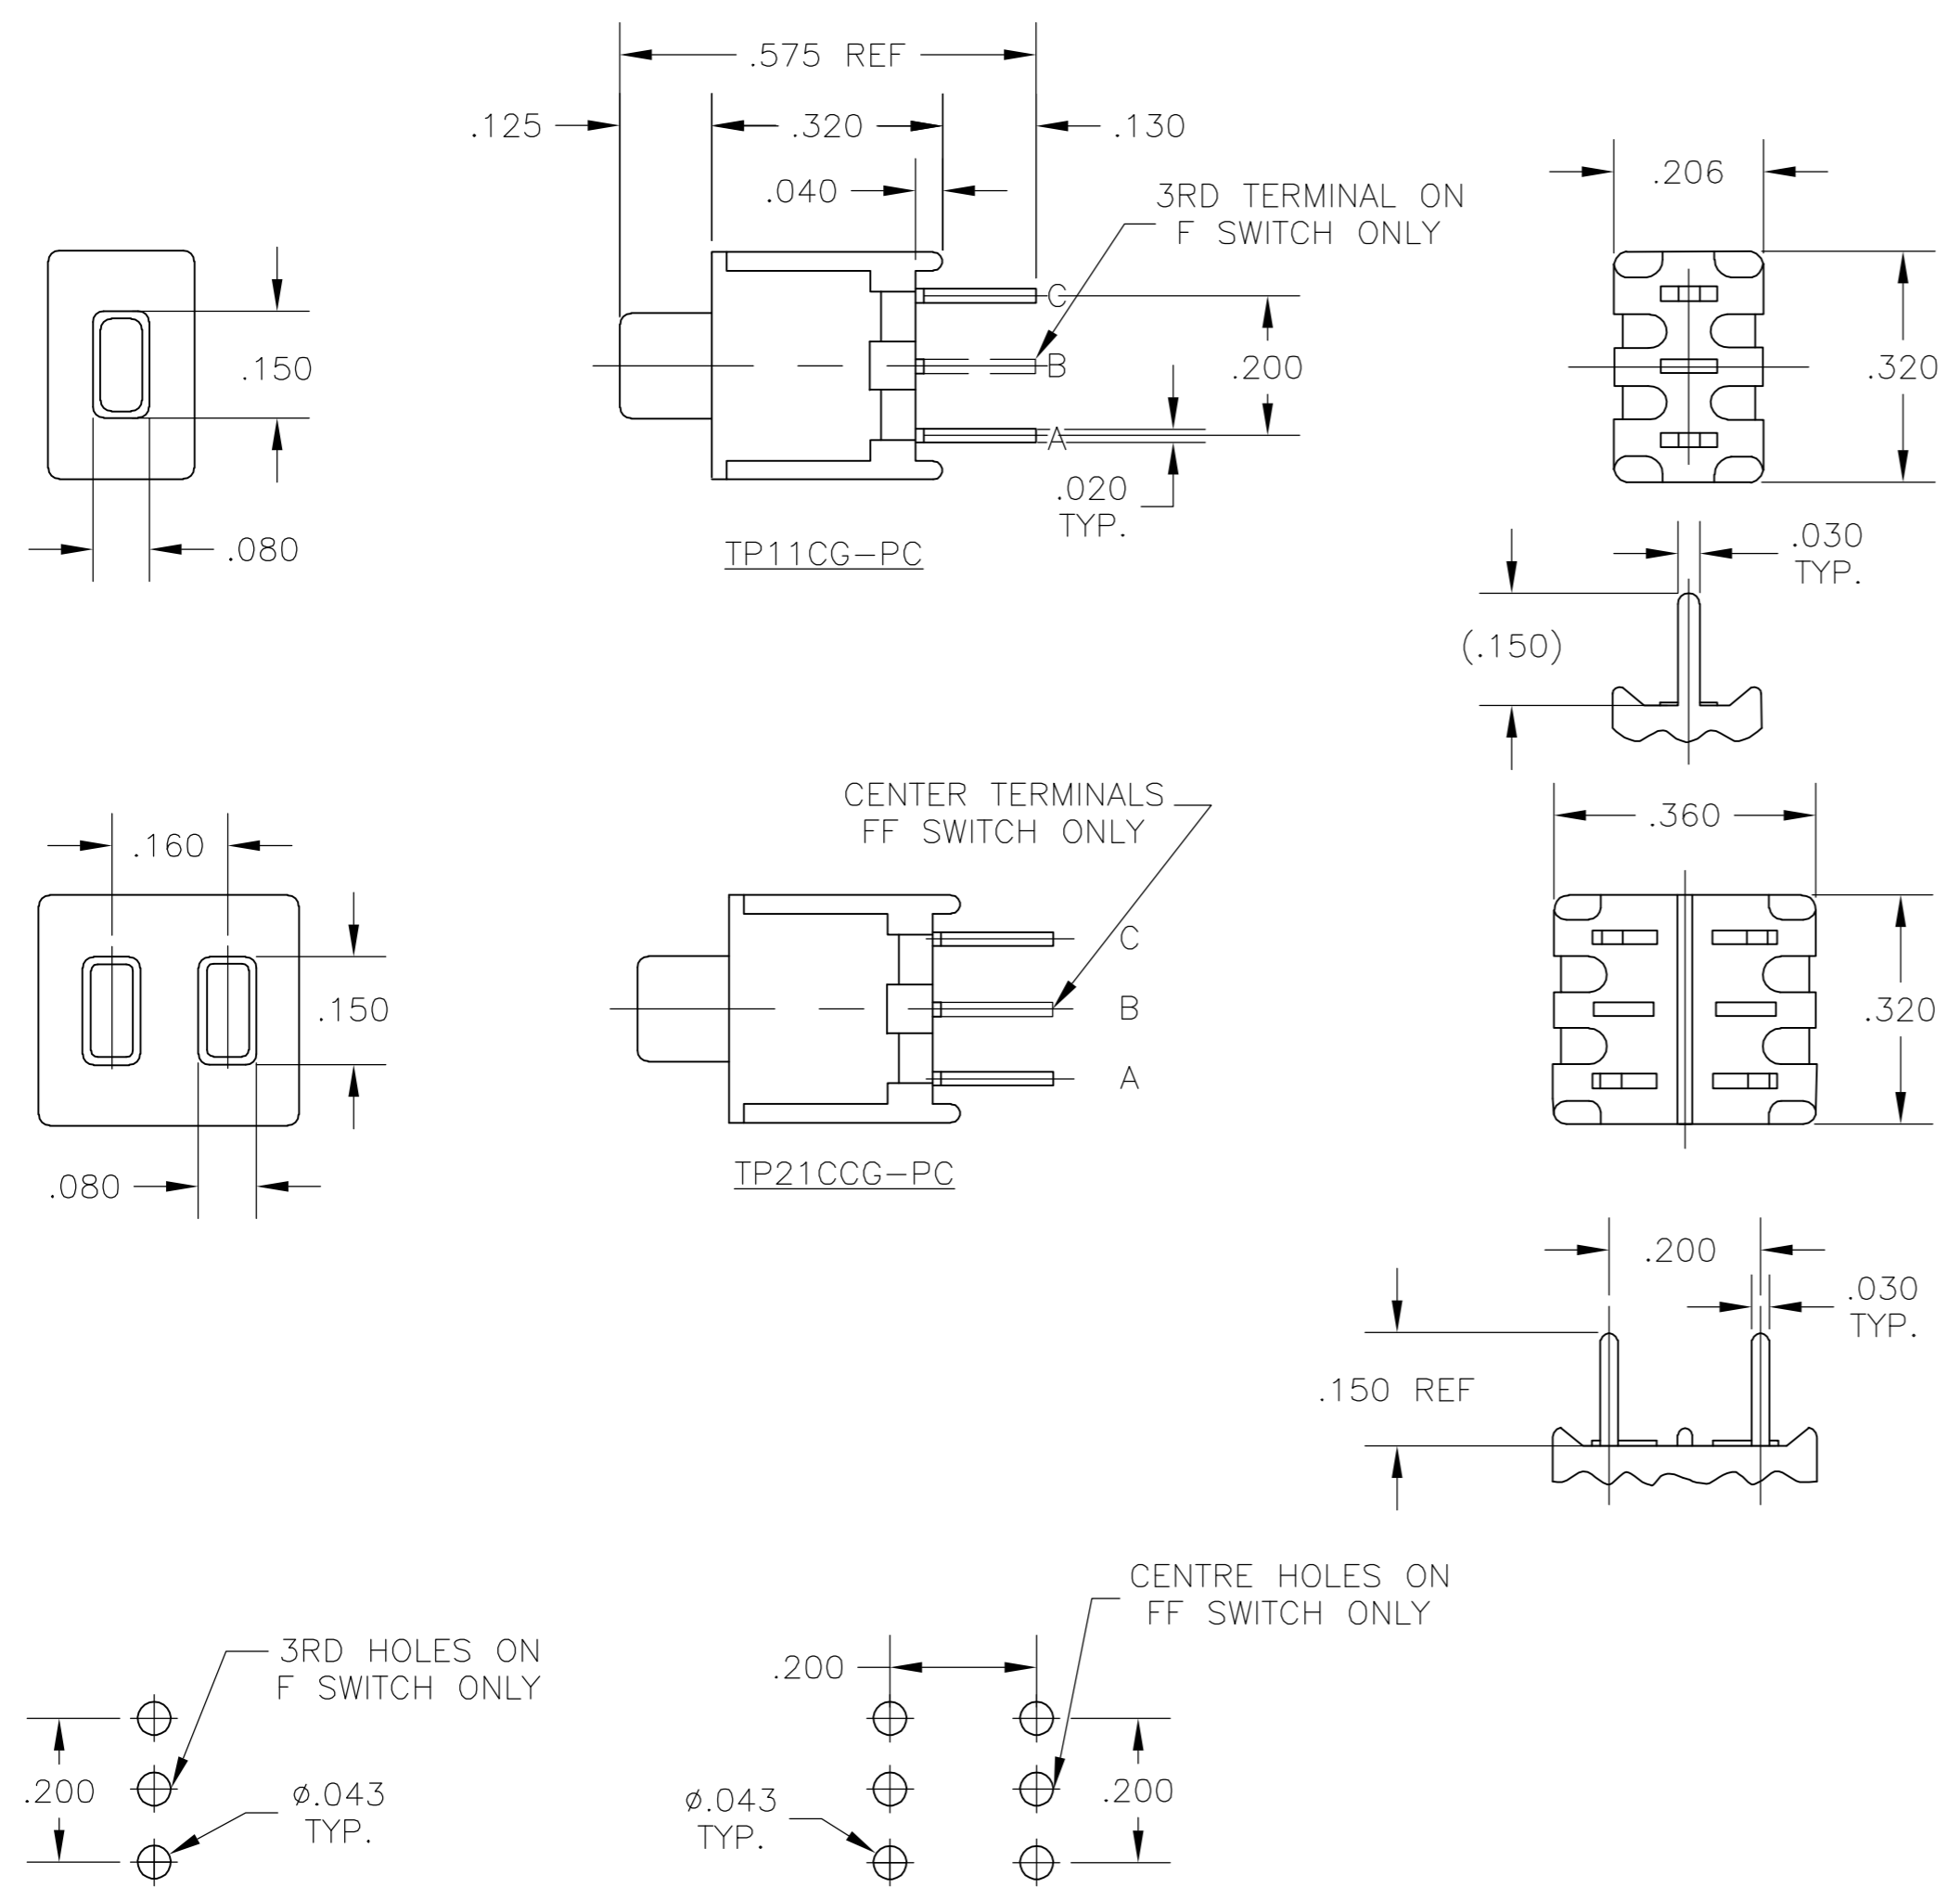

RECOMMENDED HOLE LAYOUT
 TOLERANCE ±.002 UNLESS OTHERWISE MENTIONED

MODEL NUMBER	MODEL NUMBER	ACTION	CONTACTS	
			FREE BUTTONS	DEPPRESSED BUTTONS
TP11CG-PC(*) SPST	TP21CCG-PC(*) 2 X SPST	NORMALLY OPEN	NONE	A TO C
TP11FG-PC(*) SPDT	TP21FFG-PC(*) 2 X SPDT	MOMENTARY	B TO A	B TO C

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	B.BUCKHEIT	16AUG77
CHK	B.B	16NOV78
APVD	-	-
PRODUCT SPEC	-	-
APPLICATION SPEC	-	-
WEIGHT	-	-
CUSTOMER DRAWING	SCALE 4:1	SHEET 1 OF 1

tyco Electronics Tyco Electronics Corporation
 Harrisburg, PA 17105-3608

NAME: PUSH BUTTON SWITCH
 TP11CG/FG-PC(*) AND TP21CCG/FFG-PC(*)

SIZE: A2 CAGE CODE: 00779 DRAWING NO: 1437571-4 RESTRICTED TO: -

FINISH: SEE SPECIFICATIONS

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)