

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20 BY -

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
B	ECR-15-015267		19OCT2015	DW	CW
C	ECR-21-111798		02SEP2021	WQR	CW
C1	ECR-22-152753		20SEP2022	WQR	CW
C2	ECR-24-202368		12MAR2024	RW	CW

M4 THREAD  
RECOMMENDED  
TIGHTENING TORQUE 1.2Nm

NOTES:

1. TECHNICAL CHARACTERISTICS:  
 INSULATION MATERIAL: PC  
 RATED VOLTAGE: 400V  
 RATED CURRENT: 16A  
 INSULATION RESISTANCE:  $\geq 400M\Omega$   
 RATED IMPULSE VOLTAGE: 6KV  
 POLLUTION DEGREE: 3  
 FLAMMABILITY: UL94V-0  
 MATING CYCLES: 500 CYCLES  
 OPERATION TEMPERATURE:  $-40^{\circ}C \sim +125^{\circ}C$   
 WIRE RANGE:  $0.14mm^2 \sim 4mm^2$  (AWG26-AWG12)  
 CONTACT TYPE: CRIMP CONTACT

2. CONTACTS NEED TO BE ORDERED SEPARATELY.  
 (ORDER No. REFER TO DRAWING: T20300X10XX000)

注释:

1. 技术参数:  
 绝缘材料: PC  
 额定电压: 400V  
 额定电流: 16A  
 绝缘电阻:  $\geq 400M\Omega$   
 脉冲电压: 6KV  
 污染等级: 3  
 阻燃等级: UL94V-0  
 插拔次数: 500次  
 工作温度:  $-40^{\circ}C \sim +125^{\circ}C$   
 接线范围:  $0.14mm^2 \sim 4mm^2$  (AWG26-AWG12)  
 接线类型: 冷压接

2. 端子需要单独订购。  
 (订货号参考图面: T20300X10XX000)

4X M3 THREAD, RECOMMENDED  
TIGHTENING TORQUE 0.5Nm

PANEL CUT FOR INSERTS FOR USE  
WITHOUT HOODS/ HOUSINGS

TYPE 1, T2050323101-000 T2050323101-001  
 类型 1, T2050323101-000 T2050323101-001

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC $\pm$
	1 PLC $\pm$
	2 PLC $\pm$
	3 PLC $\pm$
	4 PLC $\pm$
	ANGLES $\pm$
MATERIAL	FINISH
-	-
-	-

DWN	18DEC2014
RAGHAVENDRA H M	
CHK	18DEC2014
CHRIS WANG	
APVD	18DEC2014
XU XIANG	
PRODUCT SPEC	108-137068
APPLICATION SPEC	114-137068
WEIGHT	-
Customer Drawing	

TE Connectivity



NAME		HEEE-032-M	
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	T2050323101000	-
SCALE		SHEET	REV
1:1		1 OF 2	C2

1470-19 (3/13)

Downloaded From [Onevac.com](http://Onevac.com)



REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

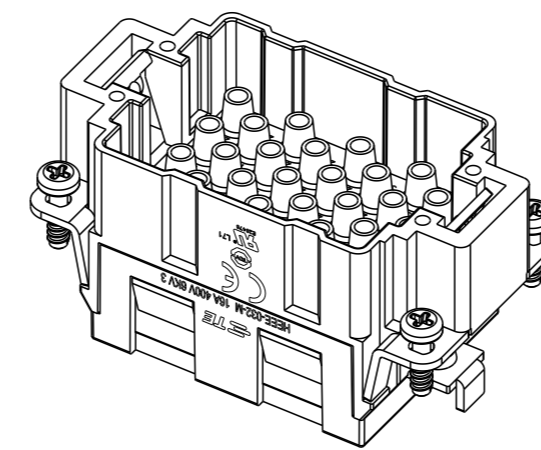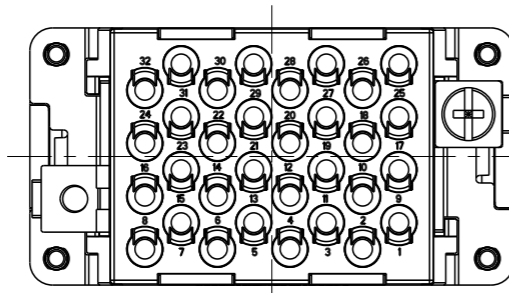


NOTES:  
 4X M3 SELF-TAPPING SCREW SEE THIS SHEET,  
 OTHER SPEC REFER TO TYPE 1.

注释:  
 4X M3 自攻螺丝参照此页, 其余产品规范参照类型 1.

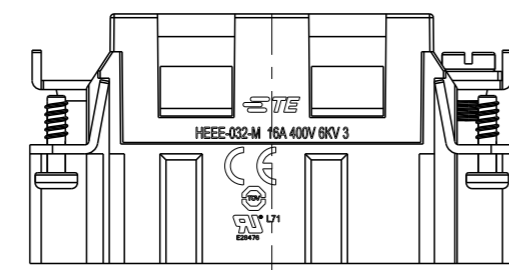


4X M3 SELF-TAPPING SCREW, RECOMMENDED  
 TIGHTENING TORQUE 1.2~1.5N.m  
 4X M3 自攻螺丝, 推荐拧紧力矩 1.2~1.5N.m

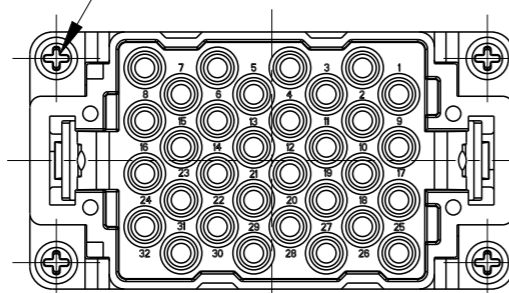

TYPE 2, T2050323101-002  
 类型 2, T2050323101-002

T2050323101-002	HEEE-032-M	HEEE-032 MALE INSERT, SELF-TAPPING HEEE-032公插, 自攻螺丝	TYPE-2 类型-2
T2050323101-001	HEEE-032-M	HEEE-032 MALE INSERT WITH STAINLESS STEEL SCREW HEEE-032公插, 带不锈钢螺丝	TYPE-1 类型-1
T2050323101-000	HEEE-032-M	HEEE-032 MALE INSERT HEEE-032公插	TYPE-1 类型-1
PART NUMBER 料号	PART DESCRIPTION 描述		TYPE 类型

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 18DEC2014 RAGHAVENDRA H M	 TE Connectivity	
DIMENSIONS: mm		CHK 18DEC2014 CHRIS WANG		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 18DEC2014 XU XIANG	PRODUCT SPEC 108-137068	
0 PLC ±-		MATERIAL -	APPLICATION SPEC 114-137068	
1 PLC ±-			WEIGHT -	
2 PLC ±-			SIZE A3	
3 PLC ±-			CAGE CODE 00779	
4 PLC ±-		DRAWING NO T2050323101000		RESTRICTED TO -
ANGLES ±-		SCALE 1:1		SHEET 2 OF 2
FINISH -		REV C2		
Customer Drawing				

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)