
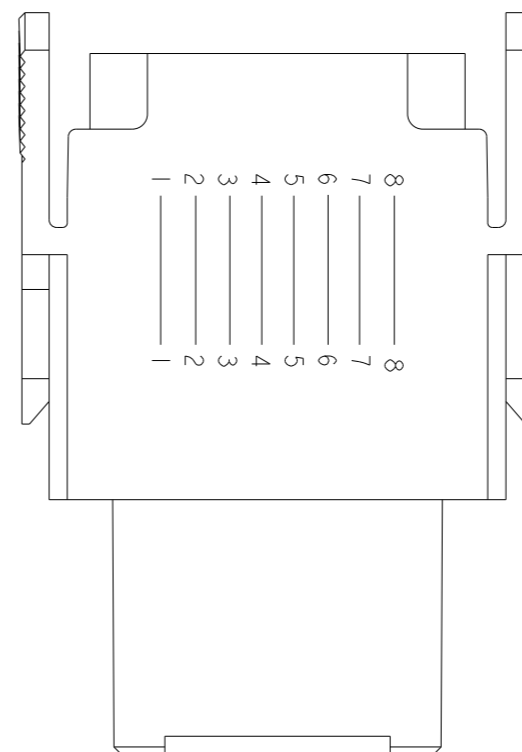
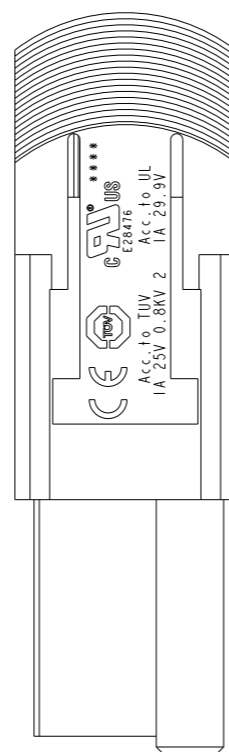
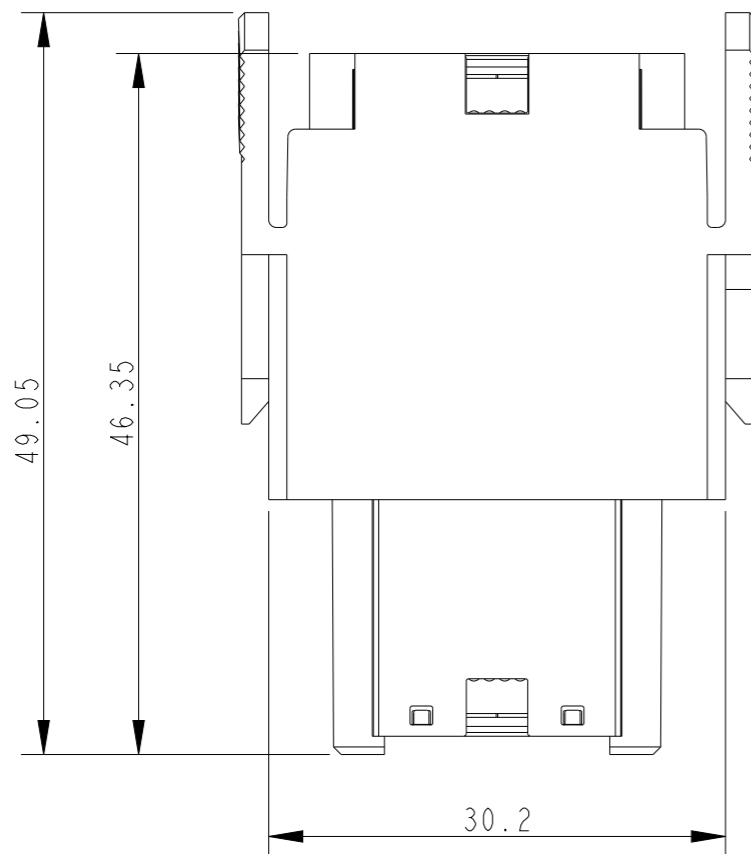
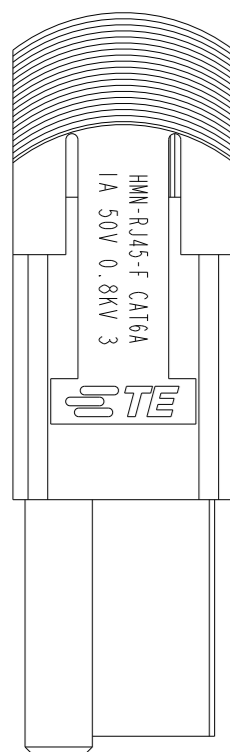


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	30 JUL 2020	GY	CW
	A1	ECR-20-016041	7 FEB 2021	GY	CW
	B	ECR-21-103103	13 MAY 2021	GY	CW
	C	ECR-21-111798	07 OCT 2021	WQR	CW


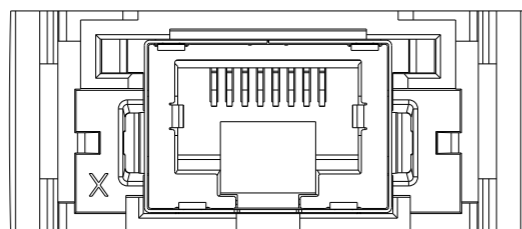


NOTES:

- TECHNICAL CHARACTERISTICS:  
 INSULATION MATERIAL: PC  
 RATED VOLTAGE: 50V  
 RATED CURRENT: 1A  
 INSULATION RESISTANCE:  $\geq 400M\Omega$   
 RATED IMPULSE VOLTAGE: 0.8KV  
 POLLUTION DEGREE: 3  
 MATING CYCLES: 500  
 OPERATION TEMPERATURE:  $-40^{\circ}C \sim +70^{\circ}C$

注释:

- 技术参数:  
 绝缘材料: PC  
 额定电压: 50V  
 额定电流: 1A  
 绝缘电阻:  $\geq 400M\Omega$   
 脉冲电压: 0.8KV  
 污染等级: 3  
 插拔次数: 500  
 工作温度:  $-40^{\circ}C \sim +70^{\circ}C$

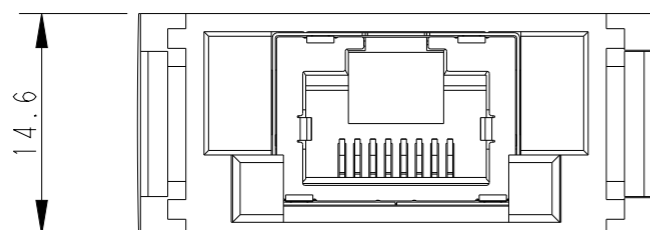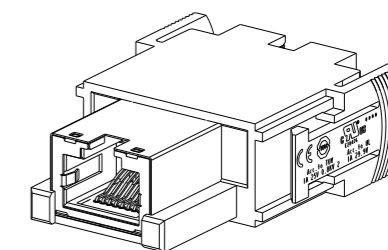

T2113000201-200	HMN-RJ45-F CAT6A	HMN-RJ45 FEMALE MODULE INSERT, CAT6A HMN-RJ45 母插, CAT6A
PART NUMBER 料号	PART DESCRIPTION 描述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN GINO.YAO 30 JUL 2020		
		CHK CHRIS.WANG 30 JUL 2020		
		APVD CHRIS.WANG 30 JUL 2020		
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME HMN-RJ45-F CAT6A
		0 PLC	±-	PRODUCT SPEC
		1 PLC	±-	108-137516
MATERIAL		2 PLC	±-	APPLICATION SPEC
		3 PLC	±-	114-137516
		4 PLC	±-	WEIGHT
		ANGLES	±-	-
		FINISH	-	CUSTOMER DRAWING
			-	SCALE 1:1
			-	SHEET 1 OF 1
			-	REV C

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)