


DETAIL Z
SCALE 20:1

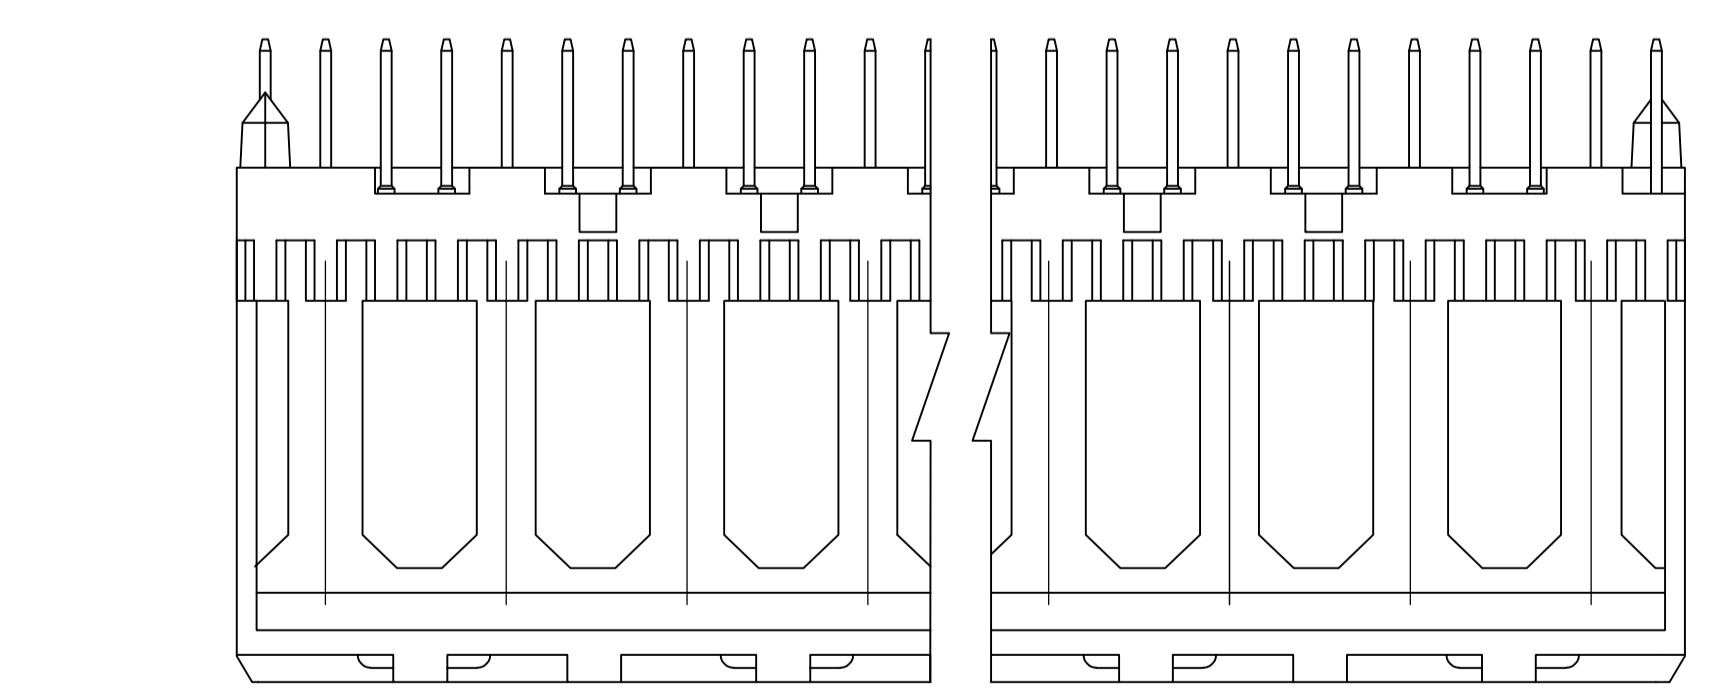

RECOMMENDED CIRCUIT PATTERN
PER IPC-D300 TYPE II, CLASS C
(COMPONENT SIDE)

- 1 HOUSING MATERIAL: LIQUID CRYSTAL POLYMER PER ASTM D5138 LCP000 G30A 32250.
- 2 CONTACT MATERIAL: PHOSPHOR BRONZE.
- 3 CONTACT FINISH:
UNDERPLATE (ENTIRE CONTACT):
0.00127 MIN NICKEL.
ON MATING SURFACES:
CONFORMS TO ALL TESTING SPECIFIED FOR TELCORDIA
UNCONTROLLED ENVIRONMENT.
ON LEADS
0.00381 MIN TIN-LEAD OVER UNDERPLATE.
LUBRICATION (ENTIRE CONTACT):
SURFACE CONDITIONER PER AMP SPEC 112-1002 AFTER PLATING.
- 4 PART MARKING PER AMP INCORPORATED SPECIFICATION 115-9009, LOCATED APPROXIMATELY AS SHOWN.
- 5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	4.25	6.5	34	17	35.88	72	1-536501-1	
	4.25	6.5	130	65	131.88	264	-536501-0	
	4.25	6.5	106	53	107.88	216	-536501-9	
	4.25	6.5	118	59	119.88	240	-536501-8	
OBSOLETE	4.25	6.5	82	41	83.88	168	-536501-7	
	4.25	6.5	58	29	59.88	120	536501-6	
	4.25	6.5	70	35	71.88	144	536501-5	
	4.25	6.5	94	47	95.88	192	536501-4	
	4.25	6.5	46	23	47.88	96	536501-3	
	4.25	6.5	22	11	23.88	48	536501-2	
	4.25	6.5	10	5	11.88	24	536501-1	
	E	D	C	B	A	FINISH	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN D.R.BENDER 08/06/92		STE TE Connectivity	
DIMENSIONS: mm		CIRK R.BENDORF 09/14/92		NAME Z-PACK 2mm FB, SIGNAL MODULE, PIN ASSEMBLY 2mm	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APV/D R.BENDORF 09/14/92		PRODUCT SPEC	
0 PLC ± -		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO	
1 PLC ± -		WEIGHT		A1 00779 C=536501	
2 PLC ± -0.13		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV S2	
3 PLC ± -					
4 PLC ± -					
ANGLES ± -					

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)