

REV. B

DCO 300781 .062<sup>+.002</sup>/<sub>-.001</sub> DIA.


POLARIZING PIN

BLUE BEAD

TOLERANCES ±.010" - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C	
RESISTANCE	320 OHMS ±10%
NOMINAL VOLTAGE	28 VDC
MUST OPERATE	13.5 VDC MAX.
	TRANSIENT SUPPRESSION - 42 VDC MAX.
MUST RELEASE	5.5 VDC MAX., 2.3 VDC MIN.

CUSTOMER DATA SHEET

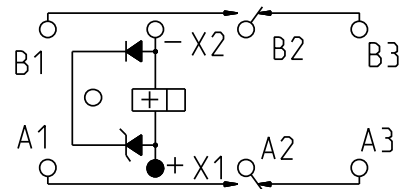

TERMINAL VIEW

ENVIRONMENT:	
VIBRATION	10 Hz TO 3000 Hz @ 30 g's
SHOCK	200 g's 6 MS. DURATION
TEMPERATURE	-70 °C TO +125 °C
NOTES: OPERATE, RELEASE 10 MS MAX.	
CONTACT STABILIZATION 2.5 MS MAX.	
CONTACT BOUNCE 1 MS MAX.	
CONTACT BREAK BOUNCE 0.1 MS MAX.	

CONTACT RATING: LOW LEVEL  
 TO 10 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE,  
 100,000 OPERATIONS

DR. B.D. 06MAR2008 CK. 3/7/08 J.M.B.

**Tyco Electronics** ©COPYRIGHT 2005  
 TYCO ELECTRONICS CORPORATION  
 ALL INTERNATIONAL RIGHTS RESERVED

CUST. \_\_\_\_\_  
 CUST. NO. M83536/10-022M REV. ---

TE NUMBER  
 1-1617749-8

CII PART NUMBER  
 FCA-210-1022M

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)