
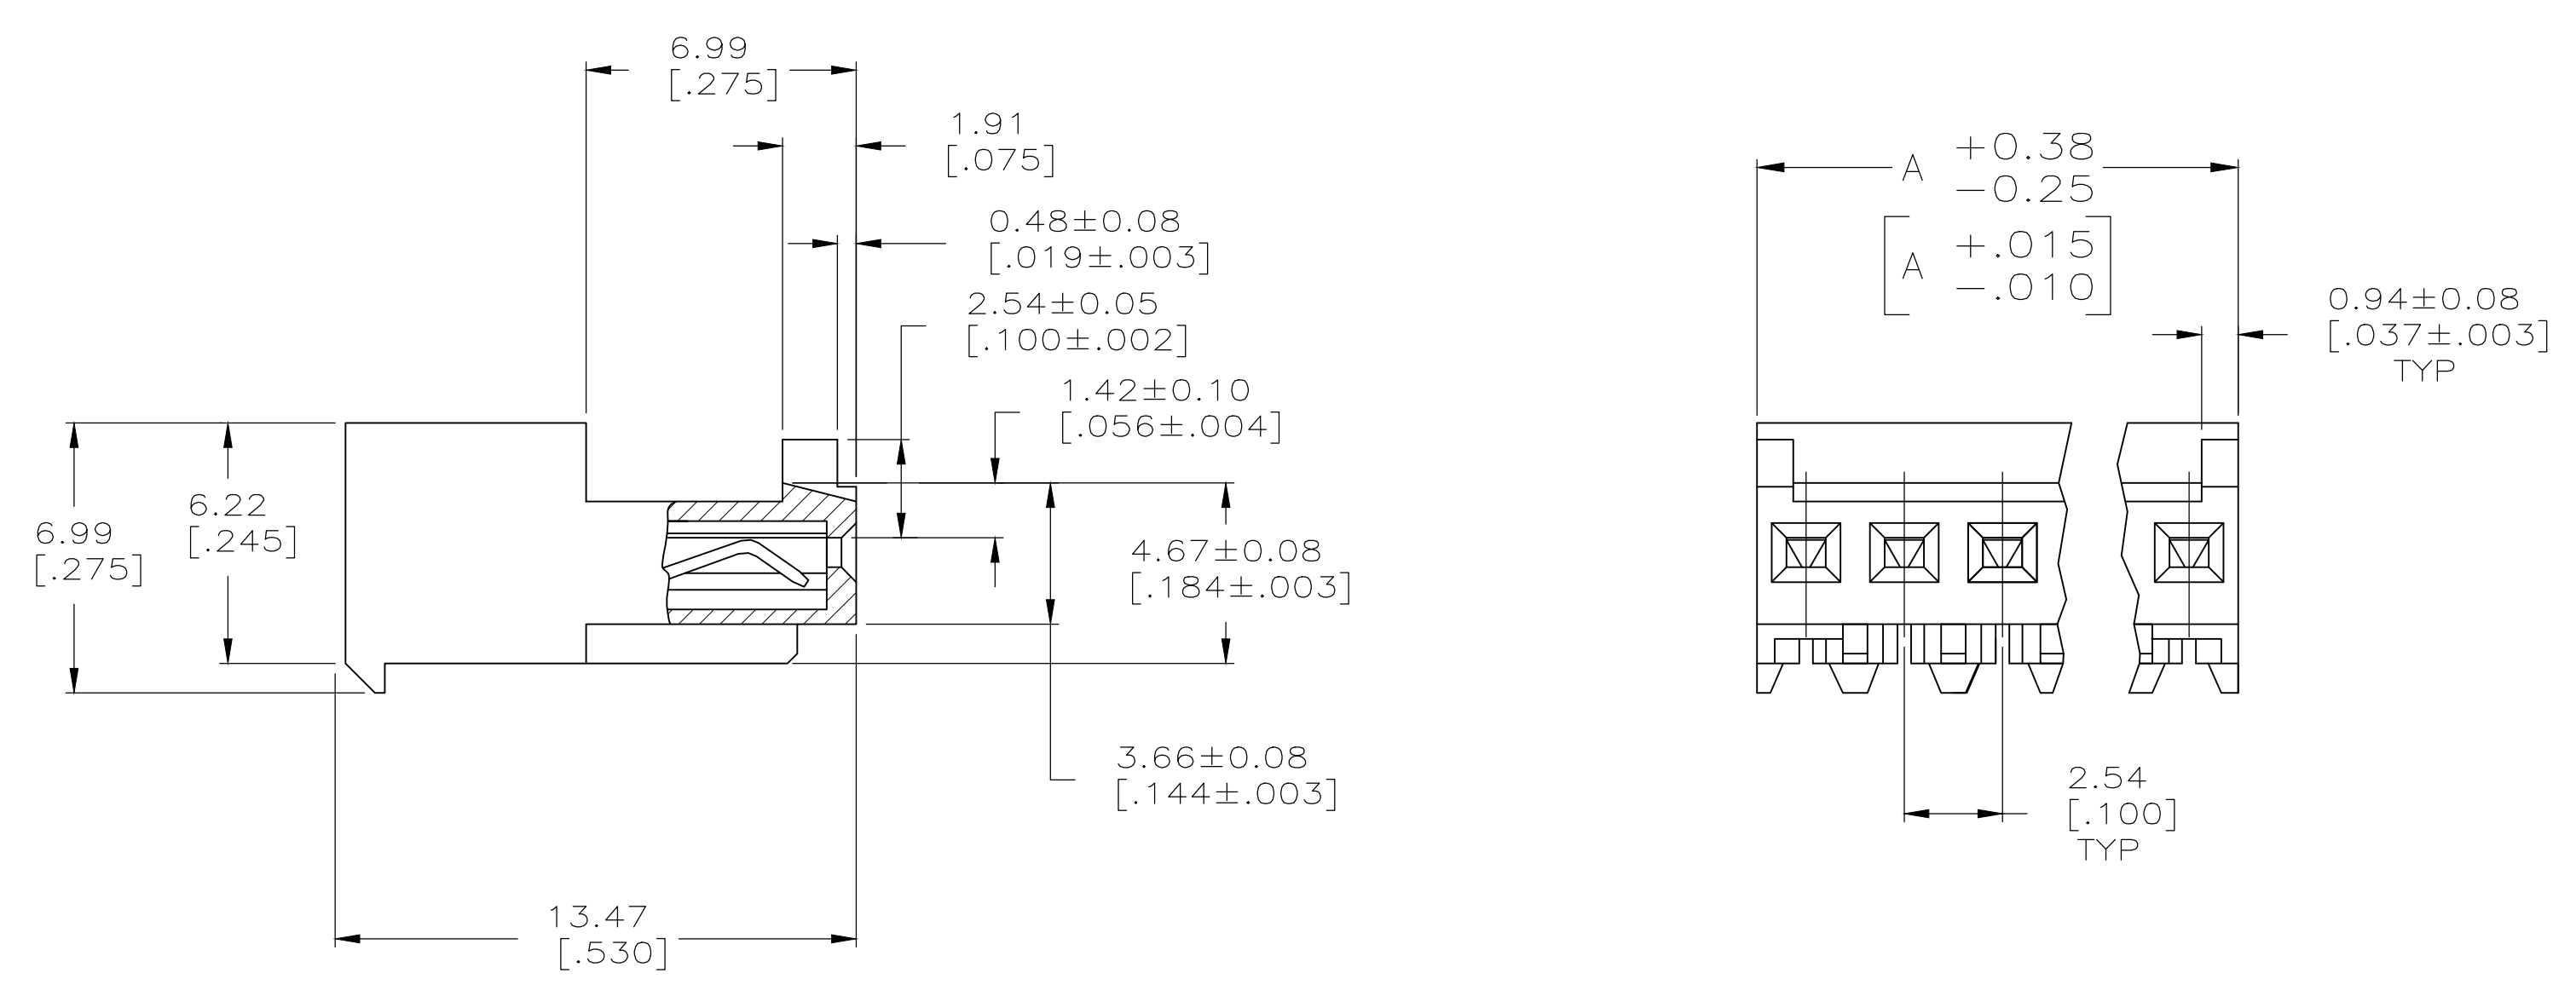


REVISIONS					
P	LTR	DESCRIPTION	DATE	DMN	APVD
E		REVISED PER ECR-20-000721	04MAR2020	PC	SW

- 1 MATERIAL: CONNECTOR-NYLON UL94V-2 (WHITE).  
 CONTACTS-0.30 [.012] THICK COPPER ALLOY  
 BRIGHT TIN-LEAD 0.00203 [.000080] MINIMUM THICK FOR CONTACTS  
 644795-2 THRU 644795-3,  
 MATTE WHISKER MITIGATED TIN PLATE 0.00203 [.000080] MINIMUM THICK OVER  
 NICKEL UNDERPLATE FOR CONTACTS 3-644795-2 THRU 3-644795-3.
- 2. CONTACTS ACCEPT 24 AWG WIRE WITH 1.52 [.060] MAXIMUM INSULATION DIAMETER.
- 3. CONTACTS MUST ACCEPT 0.36-0.51 [.014-.020] SQUARE OR ROUND POST AND  
 REMAINED LOCKED IN POSITION.
- 4 IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.
- 5. DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6. HOUSING FEATURES ARE: CLOSED END WITH LOCKING RAMP, POLARIZING TAB  
 AND WITH LED CONTACT.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 8 OBSOLETE PARTS

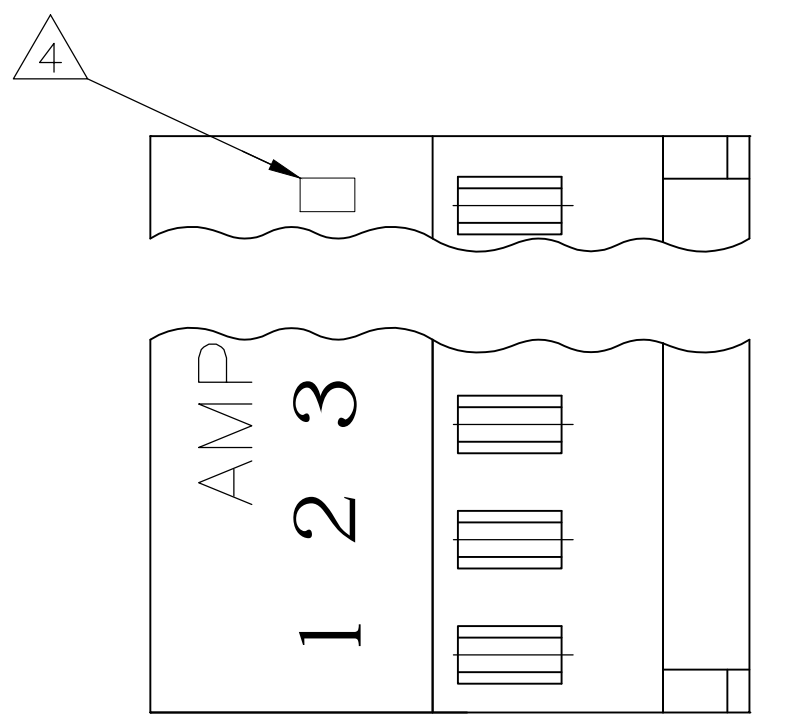

7.62 [.300]	3	3-644795-3	LEAD FREE
5.08 [.200]	2	3-644795-2	
DIM A	NO.OF POSN	ASSEMBLY	

7.62 [.300]	3	-644795-3	CONTAINS LEAD
5.08 [.200]	2	-644795-2	
DIM A	NO.OF POSN	ASSEMBLY	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN S. HOOVER 10-DEC-2004	
0 PLC ±	1 PLC ±	CIK D. ROSSI 10-DEC-2004	
	2 PLC ± 0.13 [.005]	APVD D. ROSSI 10-DEC-2004	NAME
	3 PLC ±		MTA-100 CONNECTOR ASSEMBLY,
	4 PLC ±		24 AWG, FOR .014 TO .020 POST, SPECIAL
	ANGLES ±		PRODUCT SPEC
MATERIAL	FINISH	SIZE	APPLICATION SPEC
		114-1019	108-1050
		WEIGHT	RESTRICTED TO
		A1 00779 644795	
		CUSTOMER DRAWING	SCALE 6:1 SHEET 1 OF 1 REV E

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)